


Specifications

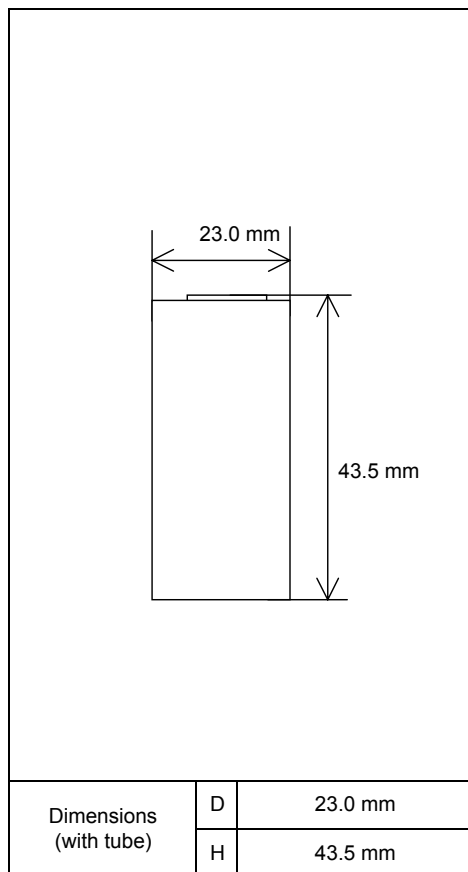


| | | |
|---|---|---|
| Type : Nickel-Cadmium Battery | | Size : SC |
| Capacity ¹⁾ | Typical | 2300mAh |
| | Minimum | 2250mAh |
| Nominal Voltage | | 1.2V |
| Charging Current x Time | Standard | 240 mA x about 14 to 16Hrs. |
| | Fast | 3600 mA x about 1Hr. |
| Ambient Temp. | Charge Condition | Standard 0°C to +45°C [+32°F to +113°F] |
| | | Fast +5°C to +40°C [+41°F to +104°F] |
| | Discharge Condition -20°C to +60°C [-4°F to +140°F] | |
| | Storage Condition -30°C to +50°C [-22°F to +122°F] | |
| Internal Impedance (Av.) (at 50% discharge) | | About 3.5mΩ (at 1000Hz) |
| Weight ²⁾ | | About 60 g |
| Size ²⁾ : (Diameter) x (Height) | | 23.0(D) x 43.5(H) mm |

1) Charge : 240mA×16h, Discharge : 480mA(E.V.=1.0V) at 25°C

2) With tube.

Typical Characteristics

Charge

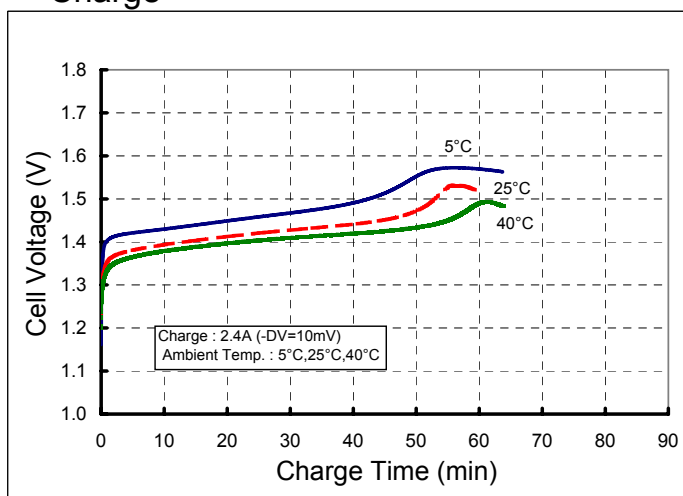

Discharge

