

**SANYO****LA5693D, 5693S, 5693M****Voltage Regulator Driver  
with Watchdog Timer****Overview**

The LA5693 is a single-chip voltage regulator for microcomputer system monitor use that performs the functions of 5V output voltage control, watchdog timer, and voltage detector. Since the LA5693 can hold the reset output, it is especially suited for use in peripheral control and monitor output applications (example : valves used in refrigeration equipment, hot water supply system).

**Applications**

- Microcomputer system for car equipment, refrigeration/heating equipment, office automation equipment.

**Functions**


- Output voltage 5V control.
- Watchdog timer.
- Power-ON reset function.
- Reset hold output [ $\overline{\text{RES}}$  (2)] (Cleared with CK reinput).

**Features**


- An external PNP transistor can be used to provide a low-saturation voltage regulator.
- Since the CK input has no edge detector, a high degree of flexibility is allowed in applications.
- Variable detection voltage.
- The watchdog time can be made longer.

**Package Dimensions**


unit: mm

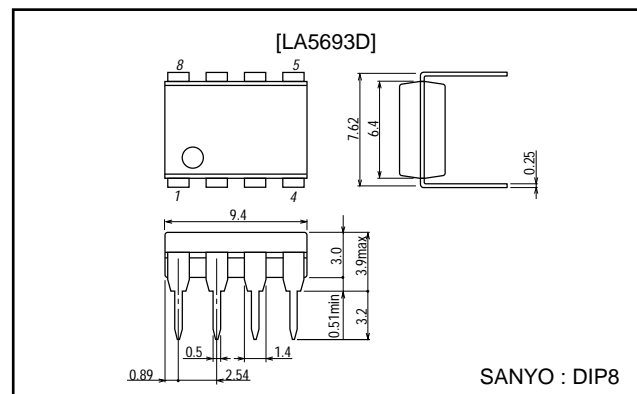**3001B-DIP8**

unit: mm

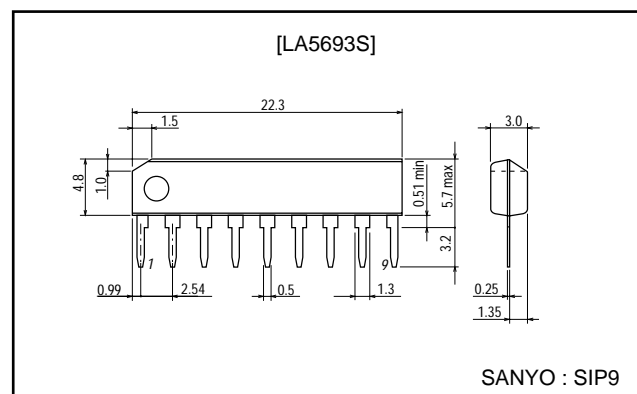**3017B-SIP9**

unit: mm

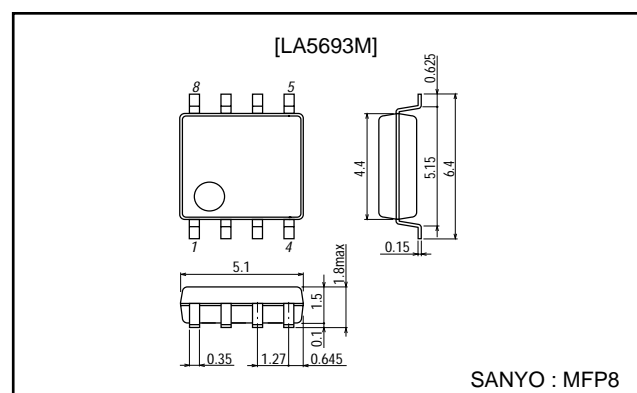**3032B-MFP8**

**Specifications****Maximum Ratings** at  $T_a=25^{\circ}\text{C}$ 

Parameter	Symbol	Conditions	Ratings	Unit
Control pin voltage	$V_{\text{CONTmax}}$	1s	60	V
Control pin voltage	$V_{\text{CONTmax}}$		41	V
Control pin current	$I_{\text{CONTmax}}$	$*V_{\text{CC}} \geq 6\text{V}$	11	mA
CK input voltage	$V_{\text{CKmax}}$		25	V
Reset pin voltage	$V_{\text{RES}(1)\text{max}},$ $V_{\text{RES}(2)\text{max}}$		41	V
Allowable power dissipation	$P_d \text{ max}$	LA5693D, 5693S	500	mW
		LA5693M	370	mW
Operating temperature	$T_{\text{opr}}$		$-40$ to $+85$	$^{\circ}\text{C}$
Storage temperature	$T_{\text{stg}}$		$-55$ to $+150$	$^{\circ}\text{C}$

\* : A PNP transistor is connected to the LA5693D, 5693S externally to provide a low-saturation voltage regulator.

Therefore,  $I_{\text{CONT}} \approx 100\text{mA}$  will flow, as starting current, in the  $V_{\text{CC}}$  range where the output cannot be regulated.

**Operating Conditions** at  $T_a=25^{\circ}\text{C}$ 


Parameter	Symbol	Conditions	Ratings	Unit
Control pin voltage	$V_{\text{CONT}}$		6 to 40	V
Control pin current	$I_{\text{CONTmax}}$		10	mA
Reset output current	$I_{\text{RES}(1)\text{max}},$ $I_{\text{RES}(2)\text{max}}$	External R pull-up	8	mA
Reset detection voltage	$V_S \text{ min}$		4	V

**Operating Characteristics** at  $T_a=25^{\circ}\text{C}$ ,  $V_{\text{CC}}=14\text{V}$ ,  $I_O=50\text{mA}$ , unless otherwise specified.


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Output voltage	$V_O$		4.8	5.0	5.2	V
Line regulation1	$\Delta V_{\text{OLN}1}$	$9\text{V} \leq V_{\text{CC}} \leq 16\text{V}$		2	10	mV
Line regulation2	$\Delta V_{\text{OLN}2}$	$6\text{V} \leq V_{\text{CC}} \leq 40\text{V}$		4	30	mV
Load regulation	$\Delta V_{\text{OLD}}$	$1\text{mA} \leq I_O \leq 50\text{mA}$		4	30	mV
Current dissipation	$I_{\text{CC}}$	$I_O=0$		4.4	6.5	mA
Output noise voltage	$V_{\text{NO}}$	$10\text{Hz} \leq f \leq 100\text{kHz}$ , $V_{\text{CK}}=0$		150		$\mu\text{V}$
Temperature coefficient of output voltage	$\Delta V_O / \Delta T_a$	$I_O=5\text{mA}$ , $-40^{\circ}\text{C} \leq T_a \leq +85^{\circ}\text{C}$		$\pm 0.2$		$\text{mV}/^{\circ}\text{C}$
Reference voltage	$V_{\text{REF}}$		1.13	1.18	1.23	V
'H'-level CK input voltage	$V_{\text{IH}}$		2			V
'L'-level CK input voltage	$V_{\text{IL}}$				0.8	V
'H'-level CK input current	$I_{\text{IH}}$	$V_{\text{CK}}=5\text{V}$		0.3	0.7	mA
'L'-level CK input current	$I_{\text{IL}}$	$V_{\text{CK}}=0\text{V}$	-1.0	-0.1		$\mu\text{A}$
'H'-level reset output voltage	$V_{\text{ORH}(1)}/$ $V_{\text{ORH}(2)}$	$\text{RES}(2) : 10\text{k}\Omega$ pull-up	4.8	5.0	5.2	V
'L'-level reset output voltage1	$V_{\text{ORL}(1)1}/$ $V_{\text{ORL}(2)1}$	$\text{RES}(2) : 10\text{k}\Omega$ pull-up		40	200	mV
'L'-level reset output voltage2	$V_{\text{ORL}(1)2}/$ $V_{\text{ORL}(2)2}$	$I_{\text{RES}(1)}=I_{\text{RES}(2)}=8\text{mA}$		0.16	0.8	V
CK input pulse width	$t_{\text{CKW}}$	$V_{\text{CK}}=5\text{V}$	3			$\mu\text{s}$
Reset output delay time	$t_d$	$C_t=1\mu\text{F}$	7.5	10	12.5	ms
Watchdog time	$t_{\text{WD}}$	$C_t=1\mu\text{F}$	30	40	50	ms
Watchdog reset time	$t_{\text{WR}}$	$C_t=1\mu\text{F}$	0.1	0.25	0.4	ms
Reset hysteresis voltage	$V_{\text{hys}}$	$V_S=4.5\text{V}$	100	200	300	mV

## LA5693D, 5693S, 5693M

### Pin Assignment

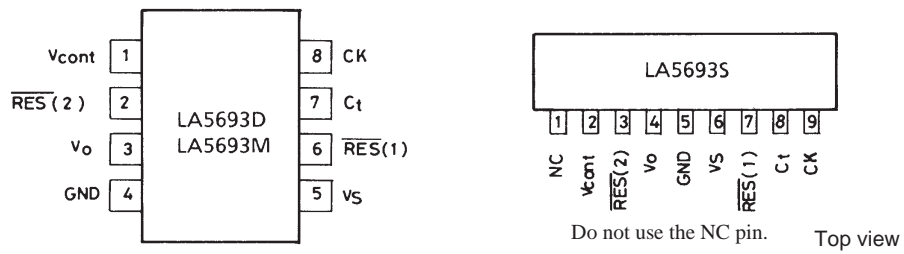


### Equivalent Circuit Block Diagram

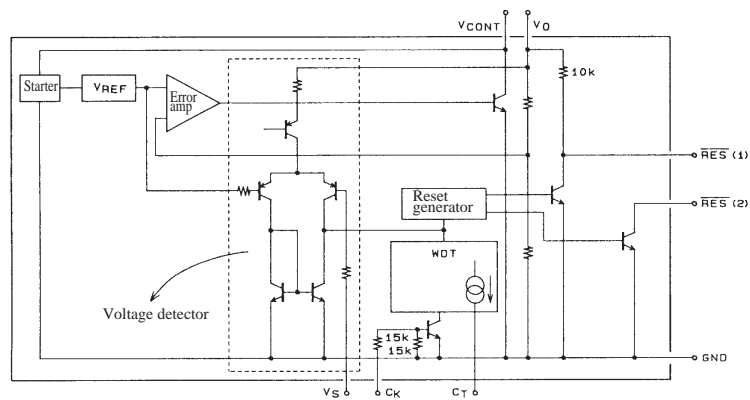


RES(1) : Contains a pull-up resistor of 10kΩ.  
RES(2) : Open collector

### Test Circuit

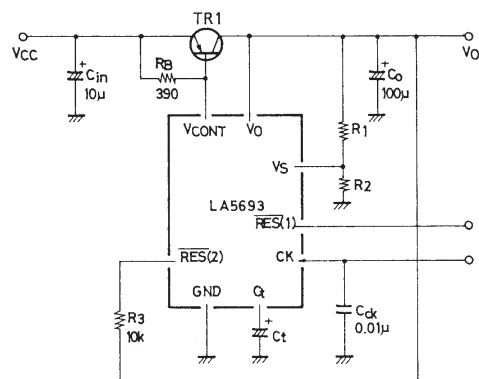

Unit (resistance : Ω, capacitance : F)

## Sample Application Circuit

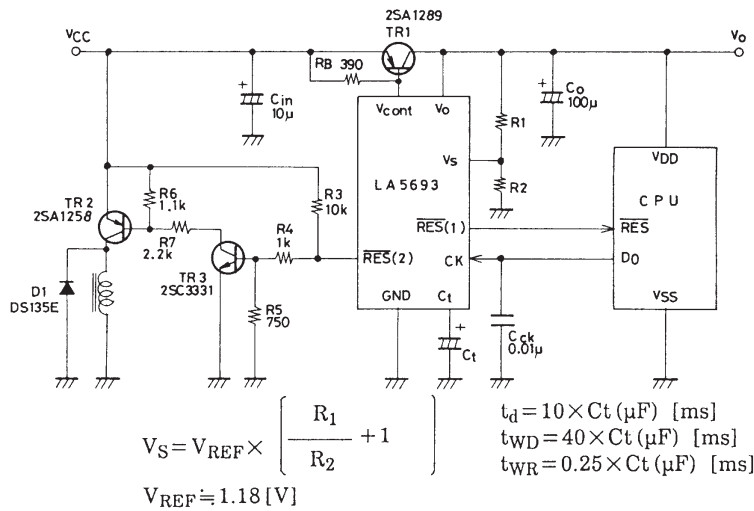


Unit (resistance : Ω, capacitance : F)

## Note on application









1. For stable operation, place  $C_{in}$ ,  $C_O$ , and TR1 as near to the IC as possible.
2. When used in 0°C or below it, a capacitor of which impedance at high-frequency operation is low and has a good temperature characteristic (such as SANYO OS-CON capacitor or others) should be used to prevent oscillation.
3. Set  $V_S$  to the output voltage level where the circuit will be reset using external resistors R1 and R2.  $V_S$  should be set to 4V or greater due to internal circuit operation.
4.  $C_{CK}$  must be inserted to cut the high range element of clock noise to prevent it from becoming a reset output noise.
5. For  $C_t$ , a capacitor which less varies the capacitance according to the temperature should be used.





## Timing Chart

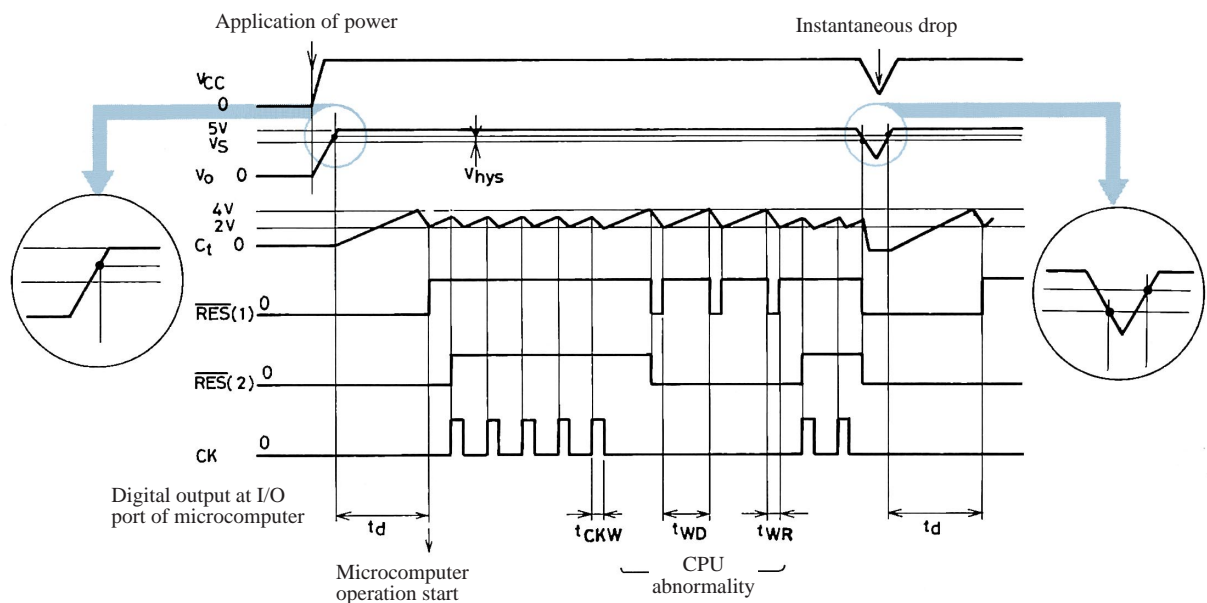

Note : Edge-triggered at the point indicated by the arrow of  $C_K$  signal.

# LA5693D, 5693S, 5693M

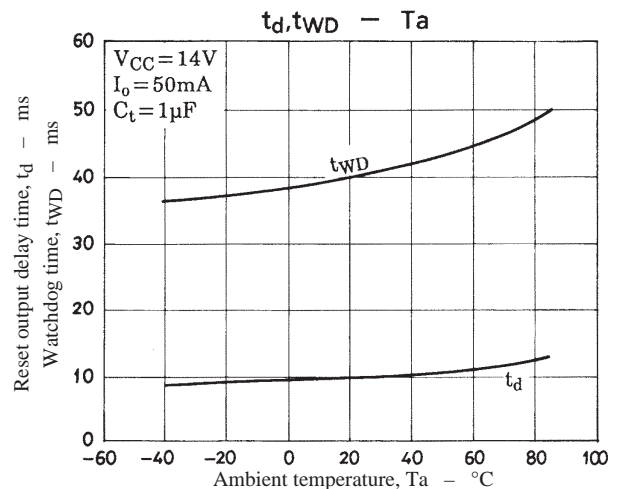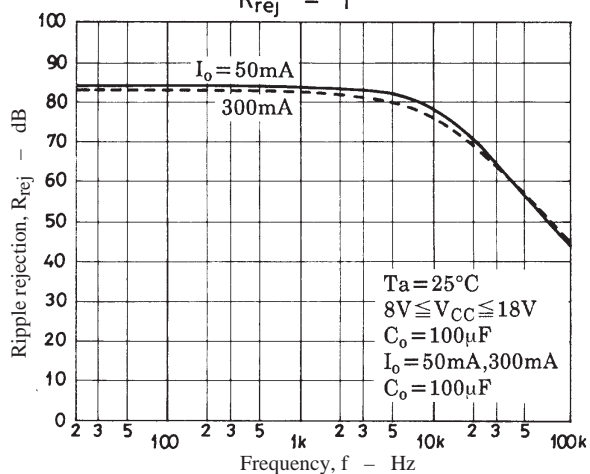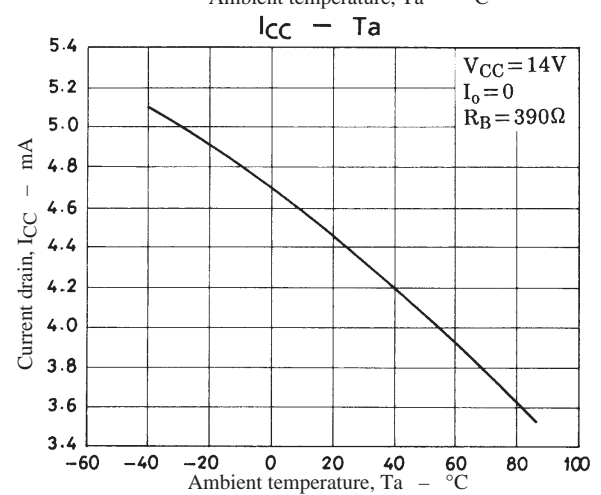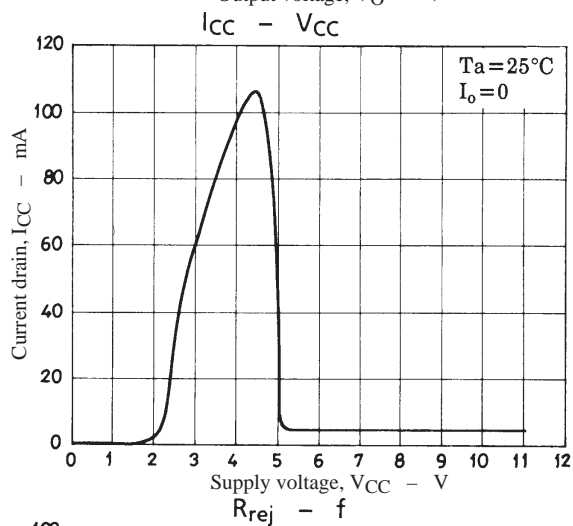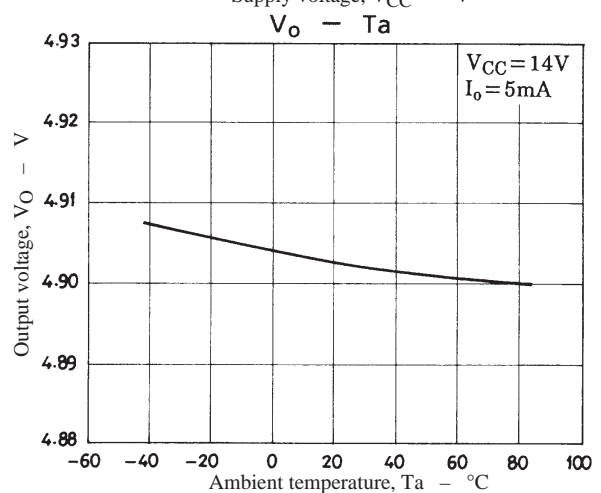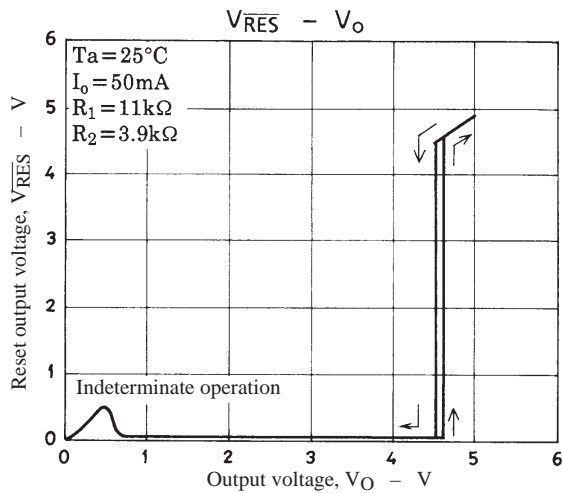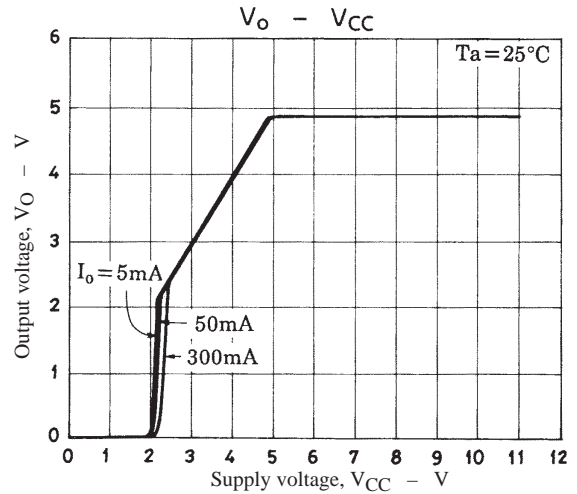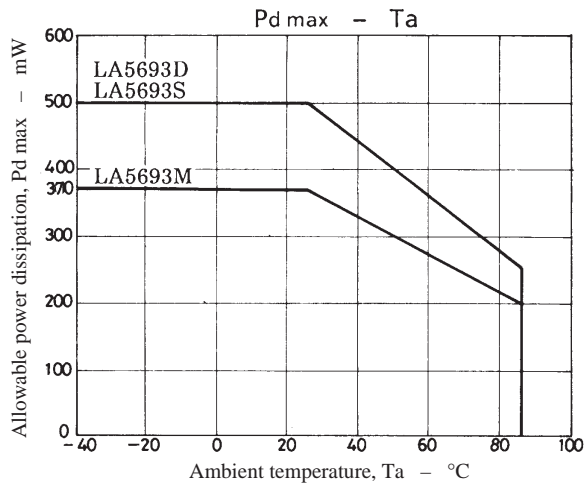

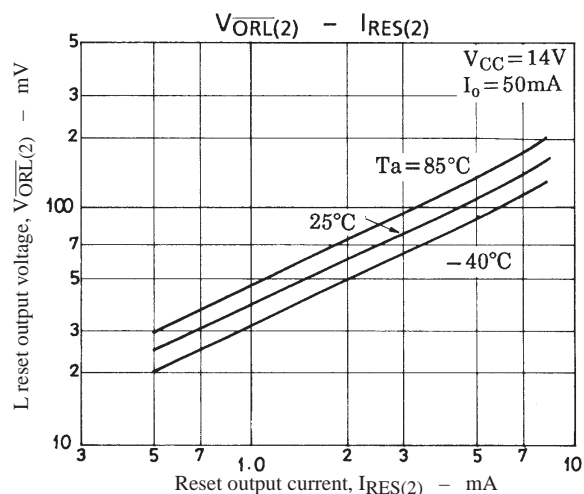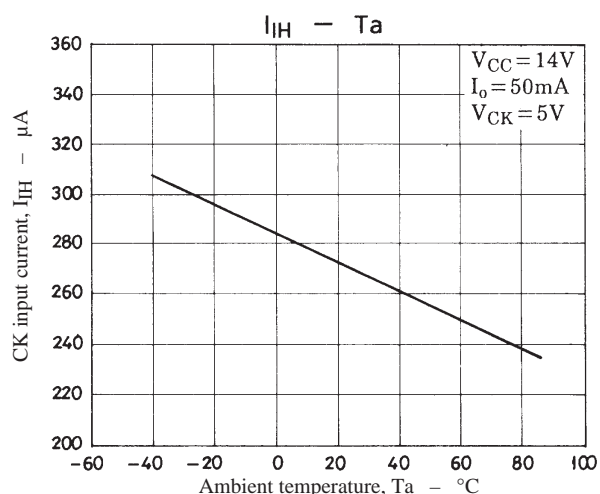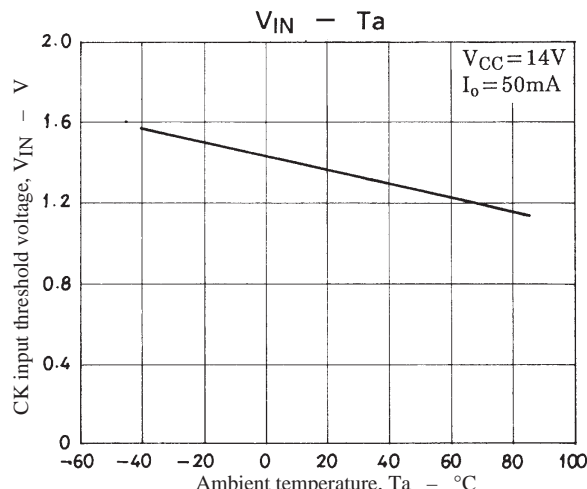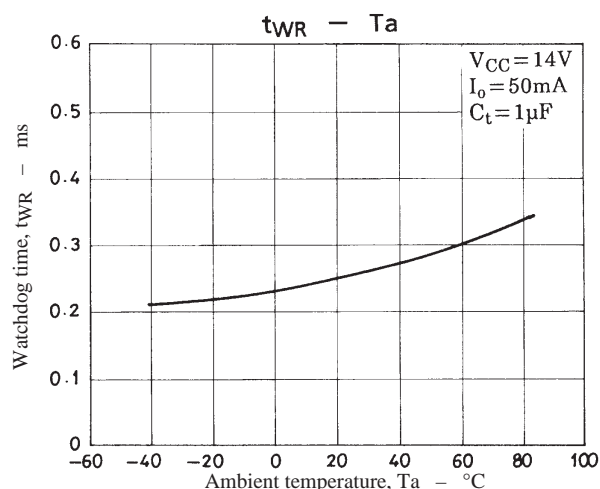

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of December, 1997. Specifications and information herein are subject to change without notice.