

# SANYO

No. ✱ 5010

**LC895170W**

## CD-ROM Error Correction LSI

## Preliminary

## Overview

The LC895170W is an upwardly compatible version of the LC89517K that supports a larger external buffer RAM capacity and is provided in a more compact package.

## Functions

- CD-ROM ECC function, subcode read function, AT interface


## Features

- Support for double-speed operation at a 16.9344 MHz operating frequency  
Either SRAM (120 ns), DRAM (80 ns), or PSRAM (85 ns) can be used.
- Support for quad-speed operation at a 33.8688 MHz operating frequency  
SRAM (70 ns) must be used.
- On-chip 12-byte output FIFO for sub-CPU to host computer transfers
- On-chip 12-byte input FIFO for host computer to sub-CPU transfers
- Subcode data can be written to SRAM by connecting the CD-DSP SUB-CODE pin and the sub-CPU can read the subcode values.
- The sub-CPU can access buffer RAM through the LC895170W.
- On-chip data transfer function for buffer RAM to buffer RAM transfers
- Pseudo-SRAM (up to  $128 \text{ kwords} \times 8 \text{ bits} \times 1$ ) can be used.
- DRAM ( $256 \text{ kwords} \times 4 \text{ bits} \times 2$ , or  $1 \text{ Mwords} \times 4 \text{ bits} \times 2$ ) can be used.
- Transfer speed: 2.8 Mbytes/s  
(The transfer speed depends on the operating frequency.)
- Operating frequencies: 16.9344 MHz (double speed) or 33.8688 MHz (quad speed)

## Package Dimensions

unit: mm

**3181-SQFP100**

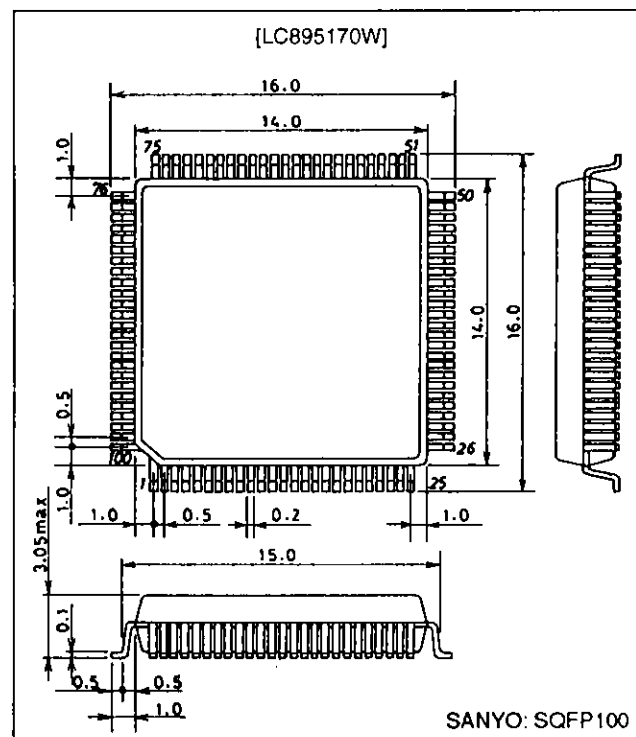


**SANYO Electric Co., Ltd. Semiconductor Business Headquarters**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN


# LC895170W

## Block Diagram

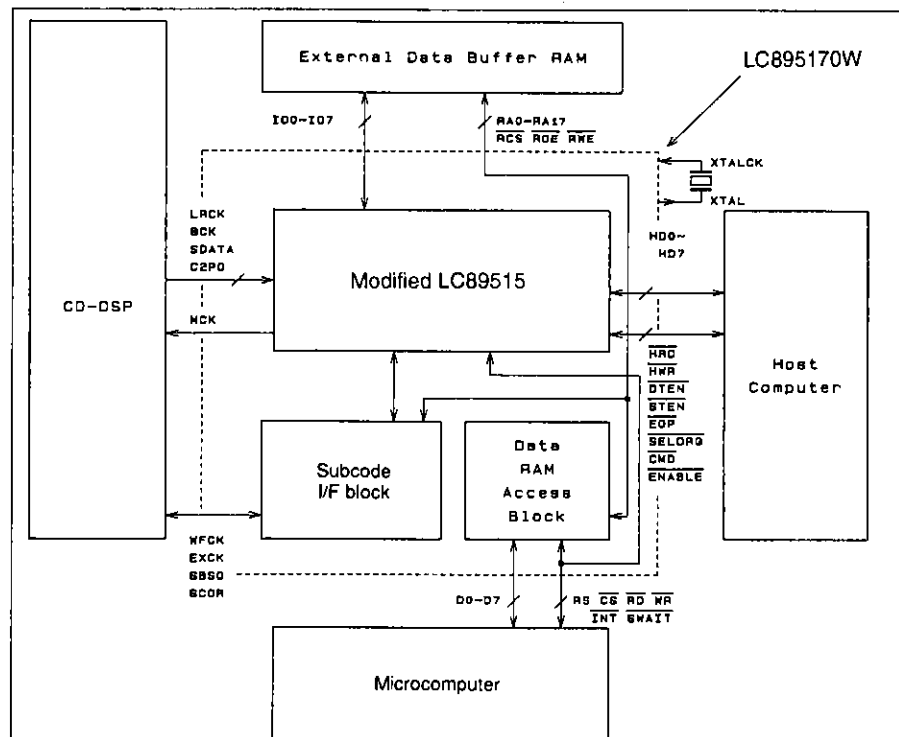

A03114

## Pin Assignment

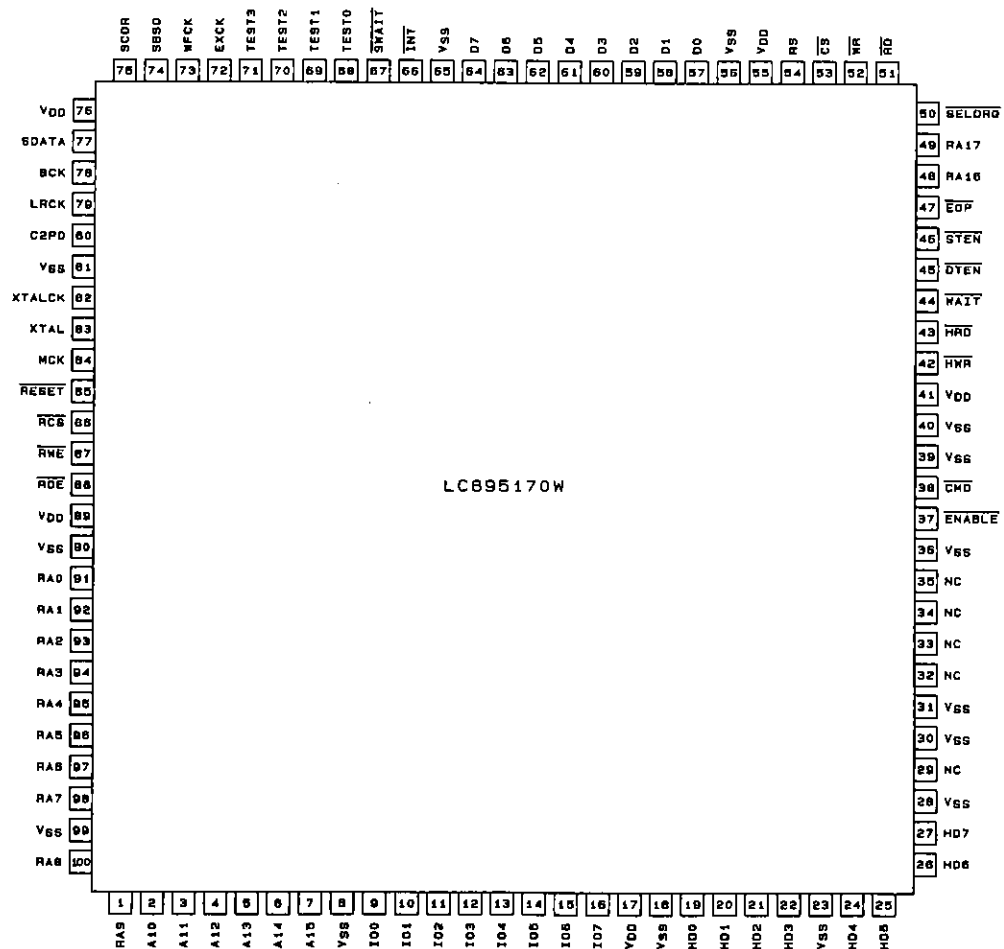

A03113

Top View

## Pin Functions

Type: I: Input pin, O: Output pin, B: Bidirectional pin, P: Power supply pin, NC: Unconnected pin

Pin No.	Pin	Type	Function
1	RA9	O	Data buffer RAM address signal outputs
2	RA10	O	
3	RA11	O	
4	RA12	O	
5	RA13	O	
6	RA14	O	
7	RA15	O	
8	V <sub>SS</sub>	P	
9	IO0	B	Data buffer RAM data signal outputs Pull-up resistors on chip
10	IO1	B	
11	IO2	B	
12	IO3	B	
13	IO4	B	
14	IO5	B	
15	IO6	B	
16	IO7	B	
17	V <sub>DD</sub>	P	
18	V <sub>SS</sub>	P	
19	HD0	B	Host data signals Pull-up resistors on chip
20	HD1	B	
21	HD2	B	
22	HD3	B	
23	V <sub>SS</sub>	P	
24	HD4	B	Host data signals Pull-up resistors on chip
25	HD5	B	
26	HD6	B	
27	HD7	B	
28	V <sub>SS</sub>	P	
29		NC	
30	V <sub>SS</sub>	P	
31	V <sub>SS</sub>	P	
32		NC	
33		NC	
34		NC	
35		NC	
36	V <sub>SS</sub>	P	
37	ENABLE	I	Host chip select signal input
38	CMD	I	Host command/data selection signal input
39	V <sub>SS</sub>	P	
40	V <sub>SS</sub>	P	
41	V <sub>DD</sub>	P	
42	HWR	I	Host data write signal input
43	HRD	I	Host data read signal input
44	WAIT	O	Host wait signal. Can be switched to function as a DRQ signal.
45	DTEN	O	Data enable signal output
46	STEN	O	Status enable signal output
47	EOP	O	End of process signal output. Used during DMA data transfers.
48	RA16	O	Data buffer RAM address signal outputs
49	RA17	O	
50	SELD <sub>RQ</sub>	I	Host data transfer mode selection signal input

Continued on next page.

# LC895170W

Continued from preceding page.

Type: I: Input pin, O: Output pin, B: Bidirectional pin, P: Power supply pin, NC: Unconnected pin

Pin No.	Pin	Type	Function
51	$\overline{RD}$	I	Microprocessor data read signal input
52	$\overline{WR}$	I	Microprocessor data write signal input
53	$\overline{CS}$	I	Chip select signal input (from microprocessor)
54	$\overline{RS}$	I	Register selection signal
55	$V_{DD}$	P	
56	$V_{SS}$	P	
57	D0	B	Microprocessor data signals Pull-up resistors on chip
58	D1	B	
59	D2	B	
60	D3	B	
61	D4	B	
62	D5	B	
63	D6	B	
64	D7	B	
65	$V_{SS}$	P	
66	$\overline{INT}$	O	Interrupt request signal output (to the microprocessor) Open-drain output with on-chip pull-up resistor
67	$\overline{SWAIT}$	O	Sub-CPU wait signal
68	TEST0	I	Test inputs should be tied low in normal operation.
69	TEST1	I	
70	TEST2	I	
71	TEST3	I	
72	EXCK	O	Subcode I/O pins
73	WFCK	I	
74	SBSO	I	
75	SCOR	I	
76	$V_{DD}$	P	
77	SDATA	I	Serial data input
78	BCK	I	Serial data input clock
79	LRCK	I	44.1 kHz strobe signal input
80	C2PO	I	C2 pointer input
81	$V_{SS}$	P	
82	XTALCK	I	Crystal oscillator circuit input
83	XTAL	O	Crystal oscillator circuit output
84	MCK	O	XTALCK-divided-by-2 output
85	$\overline{RESET}$	I	Reset. The LC895170W is reset on a low level input.
86	$\overline{RCS}$	O	RAM chip select
87	$\overline{RWE}$	O	RAM data write signal
88	$\overline{ROE}$	O	RAM data read signal
89	$V_{DD}$	P	
90	$V_{SS}$	P	
91	RA0	O	Data buffer RAM address signals output.
92	RA1	O	
93	RA2	O	
94	RA3	O	
95	RA4	O	
96	RA5	O	
97	RA6	O	
98	RA7	O	
99	$V_{SS}$	P	
100	RA8	O	Data buffer RAM address signal output.

## Specifications

### Absolute Maximum Ratings at $V_{SS} = 0\text{ V}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{DD\text{ max}}$	$T_a = 25^\circ\text{C}$	-0.3 to +7.0	V
I/O voltages	$V_{I/O}$	$T_a = 25^\circ\text{C}$	-0.3 to $V_{DD} + 0.3$	V
Allowable power dissipation	$P_{d\text{ max}}$	$T_a \leq 70^\circ\text{C}$	350	mW
Operating temperature	$T_{opr}$		-30 to +70	$^\circ\text{C}$
Storage temperature	$T_{stg}$		-55 to +125	$^\circ\text{C}$
Soldering thermal stress limit (pins only)		10 seconds	260	$^\circ\text{C}$

### Allowable Operating Ranges at $T_a = -30$ to $+70^\circ\text{C}$ , $V_{SS} = 0\text{ V}$

Parameter	Symbol	Conditions	min	typ	max	Unit
Supply voltage	$V_{DD}$		4.5	5.0	5.5	V
Input voltage range	$V_{IN}$		0		$V_{DD}$	V

### DC Characteristics at $T_a = -30$ to $+70^\circ\text{C}$ , $V_{SS} = 0\text{ V}$ , $V_{DD} = 4.5$ to $5.5\text{ V}$

Parameter	Symbol	Conditions	min	typ	max	Unit
Input high level voltage	$V_{IH1}$	All input pins other than (1) and XTALCK	2.2			V
Input low level voltage	$V_{IL1}$				0.8	V
Input high level voltage	$V_{IH2}$	RESET, all bus pins (HRD, HWR, ENABLE, CMD, RD, CS, WR, WFCK, SBSO, SCOR) (1)	2.5			V
Input low level voltage	$V_{IL2}$				0.6	V
Output high level voltage	$V_{OH1}$	$I_{OH1} = -2\text{ mA}$ : All output pins (including bus pins) other than (2) and XTALCK	2.4			V
Output low level voltage	$V_{OL1}$	$I_{OL1} = 2\text{ mA}$ : All output pins (including bus pins) other than (2) and XTALCK			0.4	V
Output low level voltage	$V_{OL2}$	$I_{OL2} = 2\text{ mA}$ : $\overline{\text{INT}}$ (on-chip pull-up resistor, open drain) (2)			0.4	V
Output high level voltage	$V_{OH3}$	$I_{OH3} = -6\text{ mA}$ : HD0 to HD7	2.4			V
Output low level voltage	$V_{OL3}$	$I_{OL3} = 6\text{ mA}$ : HD0 to HD7			0.4	V
Input leakage current	$I_L$	$V_I = V_{SS}$ , $V_{DD}$ : All input pins	-25		+25	$\mu\text{A}$
Pull-up resistance	$R_{Up}$	All bus pins, $\overline{\text{INT}}$	40	80	160	k $\Omega$

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.