


**SANYO****SVC201SPA, 201Y****Diffused Junctions Type Silicon Diode  
Varactor Diode (IOCAP)****for FM Receiver Electronic Tuning****Features**

- The SVC201SPA, 201Y are varactor diodes of hyper abrupt junction structure fabricated with ion implantation technology. It is intended for use in FM receiver electronic tuning applications.
- Capable of being operated from a low voltage (Voltage range:1 to 9V)
- High Q
- High Capacitance ratio
- Uniform capacitance-voltage characteristic provided diode to be used in combination.

**Package Dimensions**


unit:mm

1184

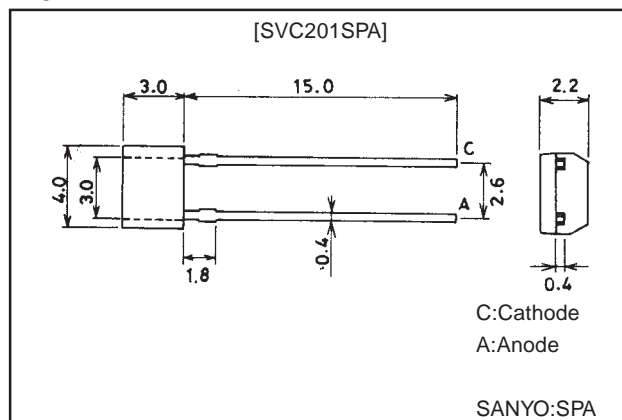

unit:mm

1010A

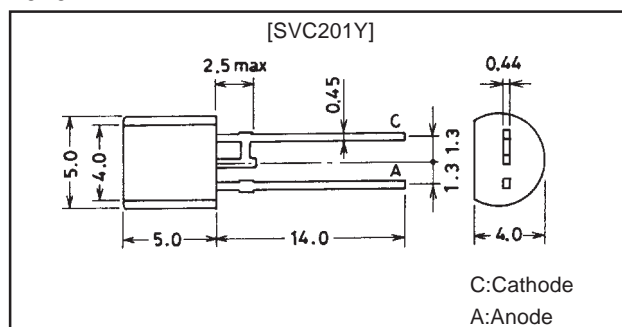**Specifications****Absolute Maximum Ratings at Ta = 25°C**

Parameter	Symbol	Conditions	Ratings	Unit
Repetitive Voltage	$V_R$		-16	V
Junction Temperature	$T_j$		100	°C
Storage Temperature	$T_{stg}$		-55 to +100	°C

**Electrical Characteristics at Ta = 25°C**

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Breakdown Voltage	$V_{(BR)R}$	$I_R = -10\mu A$	-16			V
Reverse Current	$I_R$	$V_R = -9V$			-50	nA
Interterminal Capacitance	$C_{1.6V}$	$V_R = -1.6V, f = 1MHz$	28.19		37.45	pF
	$C_{3.5V}$	$V_R = -3.5V, f = 1MHz$	19.04		24.33	pF
	$C_{5.0V}$	$V_R = -5.0V, f = 1MHz$	14.48		18.49	pF
	$C_{7.5V}$	$V_R = -7.5V, f = 1MHz$	10.17		12.99	pF
Capacitance Ratio	CR	$C_{1.6V}/C_{7.5V}$	2.2		3.7	
Series Resistance	$r_s$	$f = 50MHz, V_R = -1V$			0.6	$\Omega$
Matching Tolerance	$\Delta C_m$	$(C_{max} - C_{min})/C_{min}$			0.05	

**SANYO Electric Co.,Ltd. Semiconductor Business Headquarters**


TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

33098HA (KT)/5119MO/1309TA/4013KI, TS No.501-1/4



# SVC201SPA, 201Y

## ◆ Address and Capacitance Value

TEST POINT	C 1.6V		C 3.5V		C 5.0V		C 7.5V	
	Address	Capacitance (pF)	Address	Capacitance (pF)	Address	Capacitance (pF)	Address	Capacitance (pF)
CAPACITANCE VALUE	38	[ 37.45 35.67	27	[ 24.33 23.17	20	[ 18.49 17.61	11	[ 12.99 12.37
	37	[ 36.01 34.30	26	[ 23.39 22.28	19	[ 17.78 16.93	10	[ 12.50 11.90
	36	[ 34.63 32.98	25	[ 22.49 21.42	18	[ 17.09 16.28	9	[ 12.01 11.44
	35	[ 33.30 31.71	24	[ 21.63 20.60	17	[ 16.43 15.65	8	[ 11.54 10.99
	34	[ 32.02 30.50	23	[ 20.80 19.81	16	[ 15.81 15.05	7	[ 11.11 10.58
	33	[ 30.79 29.32	22	[ 20.00 19.04	15	[ 15.20 14.48	6	[ 10.68 10.17
	32	[ 29.60 28.19						

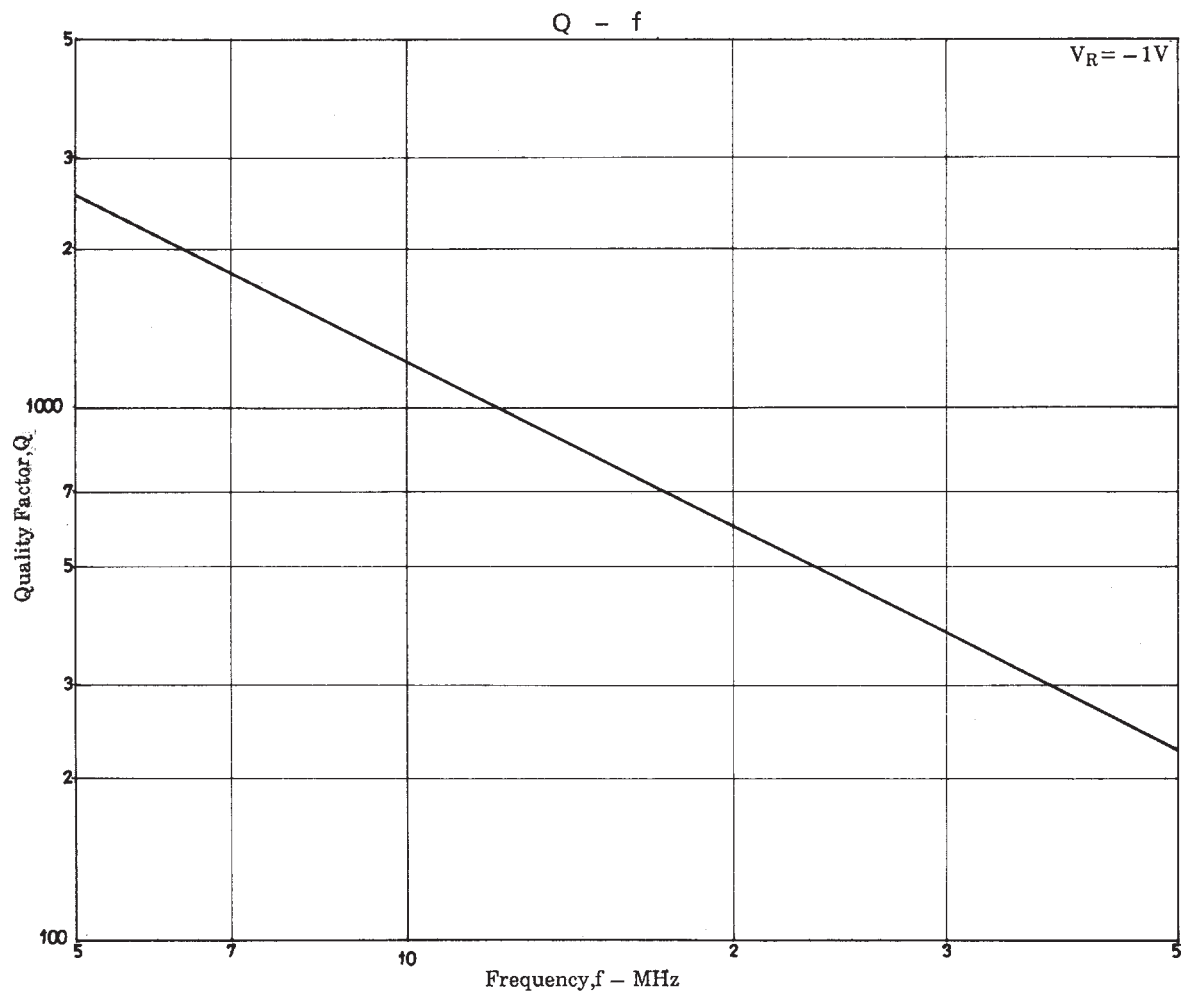

# SVC201SPA, 201Y

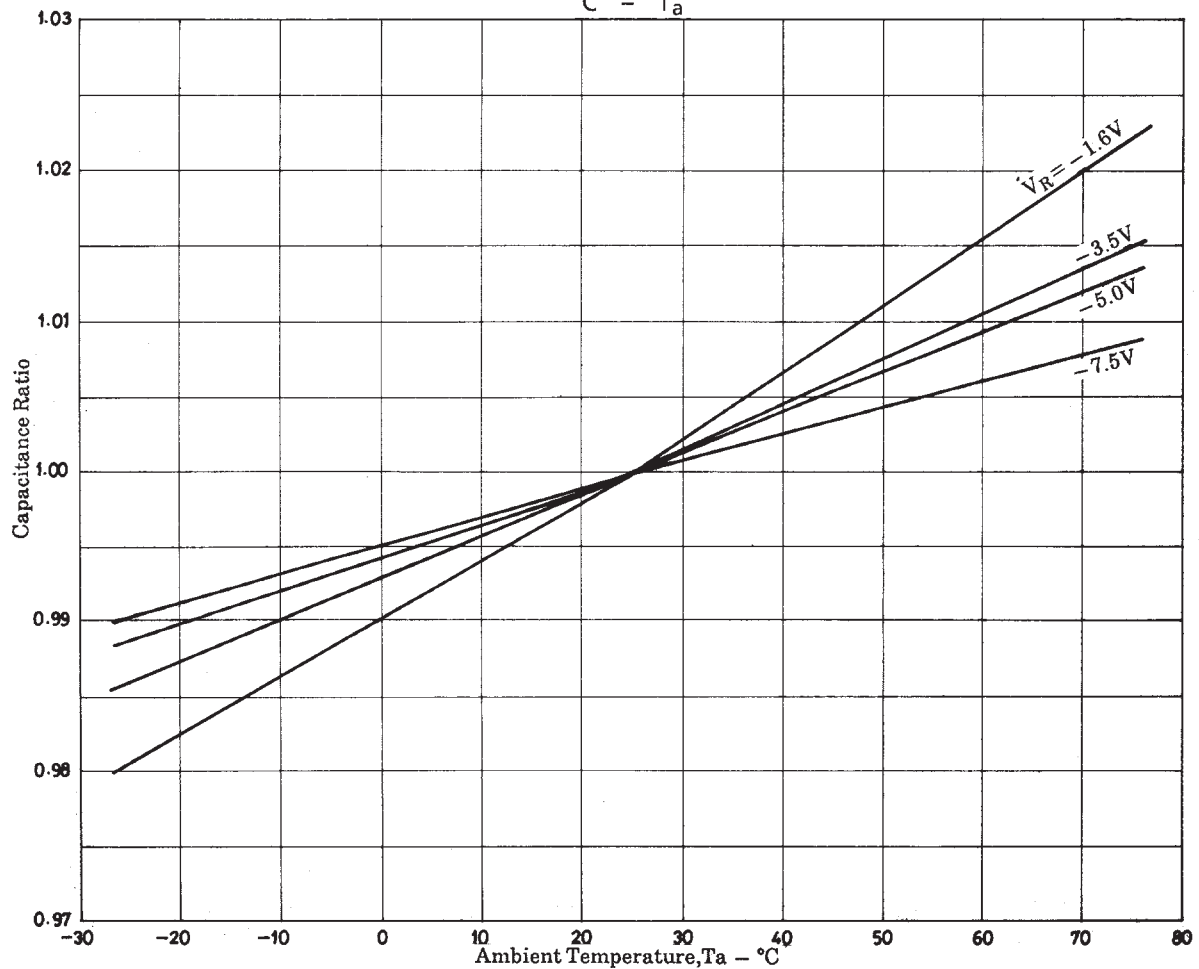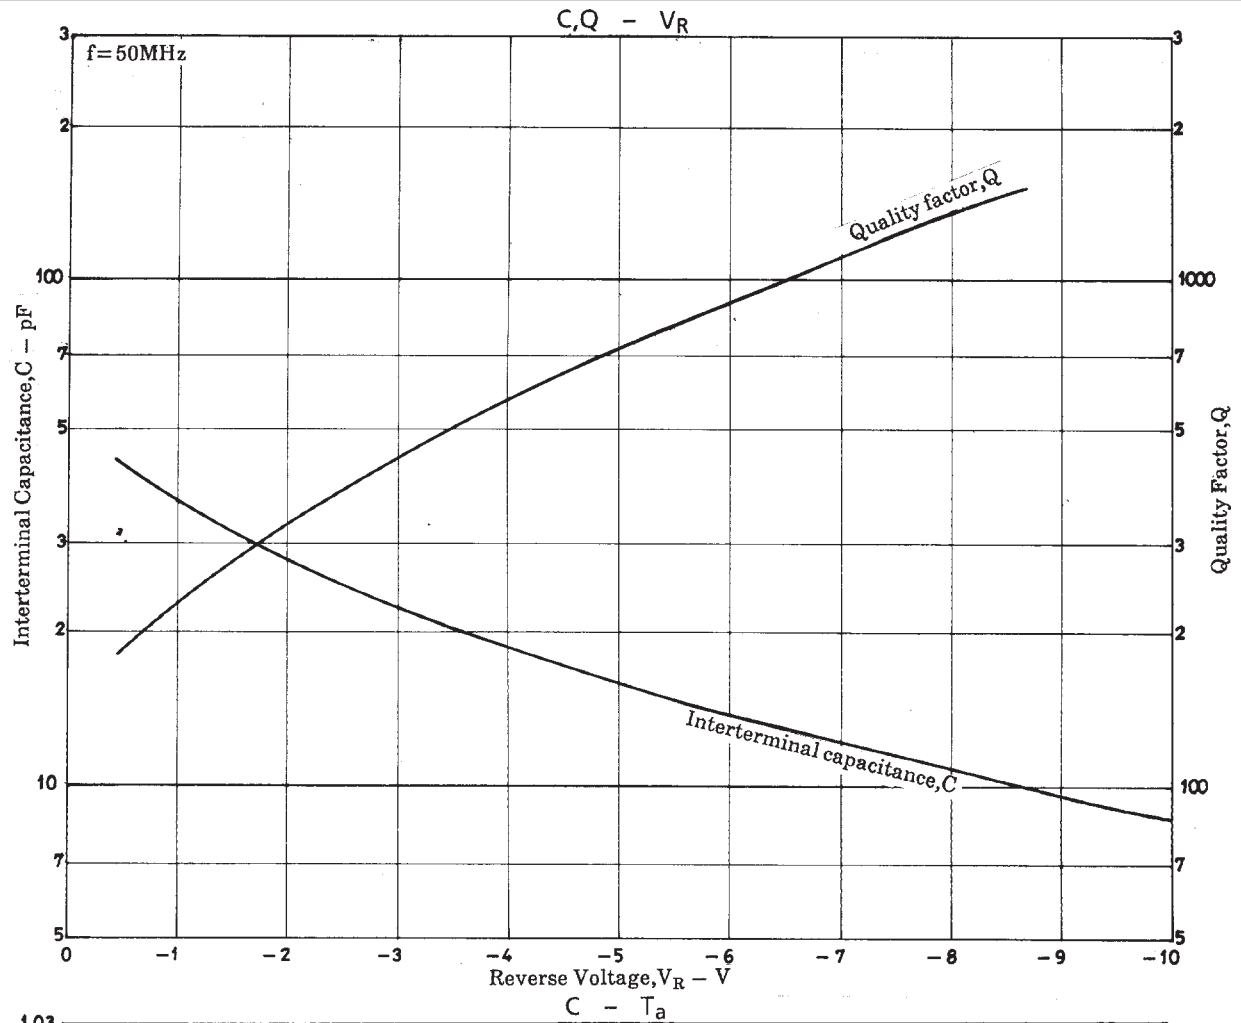

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of March, 1998. Specifications and information herein are subject to change without notice.