



Pin 1 – ADJ.  
Pin 2 –  $V_{IN}$   
Pin 3 –  $V_{OUT}$   
Case –  $V_{IN}$

**G Package – (TO-257AA)**



Pin 1 – ADJ.  
Pin 2 –  $V_{IN}$   
Pin 3 –  $V_{OUT}$


**IG Package – (TO-257AA)  
(Isolated)**



Pin 1 – ADJ.  
Pin 2 –  $V_{IN}$   
Pin 3 –  $V_{OUT}$

**SMD1 (TO276AB)**

**CERAMIC SURFACE MOUNT**




Pin 1 – ADJ.  
Pin 2 –  $V_{IN}$   
Pin 3 –  $V_{OUT}$

**SMD05 (TO-276AA)**

**CERAMIC SURFACE MOUNT**

## FEATURES


- **OUTPUT VOLTAGE RANGE OF:**  
1.25 TO 40V FOR STANDARD VERSION  
1.25 TO 50V FOR –HV VERSION
- **1% OUTPUT VOLTAGE TOLERANCE**
- **0.3% LOAD REGULATION**
- **0.01%/V LINE REGULATION**
- **COMPLETE SERIES OF PROTECTIONS:**
  - **CURRENT LIMITING**
  - **THERMAL SHUTDOWN**
  - **SOA CONTROL**

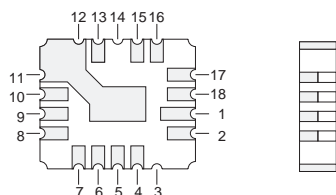

Pins 4,5 – ADJ.  
Pins 6,7,8,9,10,11,12,13 –  $V_{OUT}$   
Pins 15,16,17,18,1,2 –  $V_{IN}$


**LCC4**

**CERAMIC SURFACE MOUNT**




Pin 1 – ADJ.  
Pin 2 –  $V_{OUT}$   
Case –  $V_{IN}$

**K Package – TO-3 (TO-204AA)**



Pin 1 – ADJ.  
Pin 2 –  $V_{OUT}$   
Case –  $V_{IN}$

**R Package – TO-66  
(TO-213AA)**



Pin 1 – ADJ.  
Pin 2 –  $V_{IN}$   
Pin 3 –  $V_{OUT}$   
Case –  $V_{IN}$

**T Package – TO-220**

## ABSOLUTE MAXIMUM RATINGS ( $T_{case} = 25^{\circ}C$ unless otherwise stated)

$V_{I-O}$	Input - Output Differential Voltage	– Standard – HV Series	40V 50V
$I_O$	Output Current		Internally limited
$P_D$	Power Dissipation		Internally limited
$T_j$	Operating Junction Temperature Range		See Order Information Table
$T_{stg}$	Storage Temperature		-65 to 150°C

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

**Semelab plc.** Telephone +44(0)1455 556565. Fax +44(0)1455 552612.

E-mail: [sales@semelab.co.uk](mailto:sales@semelab.co.uk)

Website: <http://www.semelab.co.uk>

Document Number 2831

Issue 3

Parameter	Test Conditions	IP137A , IP137AHV LM137A , LM137AHV			IP137 , IP137HV LM137 , LM137HV			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
$V_{REF}$ Reference Voltage	$I_{OUT} = 10\text{mA}$	-1.238	-1.25	-1.262	-1.225	-1.25	-1.275	V
	$I_{OUT} = 10\text{mA to } I_{MAX}$ $T_J = -55 \text{ to } 150^\circ\text{C}$ $V_{IN} - V_{OUT} = 3\text{V to } V_{MAX}$ $P \leq P_{MAX}$	-1.220	-1.25	-1.280	-1.200	-1.250	-1.300	V
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$ Line Regulation 1	$V_{IN} - V_{OUT} = 3\text{V to } V_{MAX}$		0.005	0.010		0.010	0.020	%V
	$T_J = -55 \text{ to } 150^\circ\text{C}$		0.010	0.030		0.020	0.050	
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$ Load Regulation 1	$I_{OUT} = 10\text{mA to } I_{MAX}$ $V_{OUT} \leq 5\text{V}$		5	25		15	25	mV
	$I_{OUT} = 10\text{mA to } I_{MAX}$ $V_{OUT} \geq 5\text{V}$		0.1	0.5		0.3	0.5	%
	$I_{OUT} = 10\text{mA to } I_{MAX}$ $V_{OUT} \leq 5\text{V}$		10	50		20	50	mV
	$T_J = -55 \text{ to } 150^\circ\text{C}$ $V_{OUT} \geq 5\text{V}$		0.2	1		0.3	1	%
Thermal Regulation	$t_p = 10\text{ms}$ $T_A = 25^\circ\text{C}$		0.002	0.020		0.002	0.02	%W
	LCC4 Package			0.040			0.040	
Ripple Rejection	$V_{OUT} = -10\text{V}$ $C_{ADJ} = 0$	60	66		60			dB
	$f = 120\text{Hz}$ $C_{ADJ} = 10\mu\text{F}$ $T_J = -55 \text{ to } 150^\circ\text{C}$	70	80		66	77		dB
$I_{ADJ}$ Adjust Pin Current	$T_J = -55 \text{ to } 150^\circ\text{C}$		65	100		65	100	$\mu\text{A}$
$\Delta I_{ADJ}$ Adjust Pin Current Change	$T_J = -55 \text{ to } 150^\circ\text{C}$ $I_{OUT} = 10\text{mA to } I_{MAX}$		0.2	2		0.5	5	$\mu\text{A}$
	$V_{IN} - V_{OUT} = 3\text{V to } 40\text{V}$		1.0	5		2	5	
	$V_{IN} - V_{OUT} = 3\text{V to } 50\text{V}$ (HV SERIES)		2.0	6		3	6	
$I_{MIN}$ Minimum Load Current	$T_J = -55 \text{ to } 150^\circ\text{C}$ $V_{IN} - V_{OUT} \leq 40\text{V}$		2.5	5		2.5	5	mA
	$V_{IN} - V_{OUT} \leq 10\text{V}$		1.2	3		1.2	3	
$I_{CL}$ Current Limit	$T_J = -55 \text{ to } 150^\circ\text{C}$ $V_{IN} - V_{OUT} \leq 15\text{V}$	1.5	2.2	3.2	1.5	2.2	3.2	A
	$V_{IN} - V_{OUT} = 40\text{V}$	0.24	0.4	1	0.24	0.4		
	$V_{IN} - V_{OUT} = 50\text{V}$ (HV SERIES)	0.2	0.4	0.8	0.2	0.4	0.8	
$\frac{\Delta V_{OUT}}{\Delta T_{TEMP}}$ Temperature Stability	$T_J = -55 \text{ to } 150^\circ\text{C}$		0.6	1.5		0.6		%
$\frac{\Delta V_{OUT}}{\Delta T_{IME}}$ Long Term Stability	$T_A = +125^\circ\text{C}$ $t = 1000 \text{ Hrs}$		0.3	1		0.3	1	%
$e_n$ RMS Output Noise (% of $V_{OUT}$ )	$f = 10 \text{ Hz to } 10 \text{ kHz}$ $T_A = 25^\circ\text{C}$		0.003			0.003		%
$R_{\theta JC}$ Thermal Resistance Junction to Case	K Package		2.3	3		2.3	3	$^\circ\text{C/W}$
	R Package		5	7		5	7	
	G Package		3	5		3	5	
	LCC4 Package			13			13	

1) Regulation is measured at constant junction temperature, using pulse testing at a low duty cycle. Changes in output voltage due to heating effects are covered under thermal regulation specifications. Load regulation is measured at a point  $\frac{1}{8}$ " from the bottom of the package for the TO-3 and TO-66 packages, at the junction of the wide and narrow portion of the output lead for the SMD packages, and  $\frac{1}{8}$ " below the base of the package on the output pin of the TO-257 package.

2) Test Conditions unless otherwise stated:  $V_{IN} - V_{OUT} = 5\text{V}$  ,  $I_{OUT} = 0.5\text{A}$  ,  $P_{MAX} = 20\text{W}$  ,  $I_{MAX} = 1.5\text{A}$  ,  $V_{MAX} = 40\text{V}$  for standard series , 50V for HV series.

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

**Semelab plc.** Telephone +44(0)1455 556565. Fax +44(0)1455 552612.

E-mail: [sales@semelab.co.uk](mailto:sales@semelab.co.uk) Website: <http://www.semelab.co.uk>

Document Number 2831

Issue 3

Parameter	Test Conditions	IP337A IP337AHV			IP337, IP337HV LM337, LM337HV			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
$V_{REF}$ Reference Voltage	$I_{OUT} = 10\text{mA}$	-1.238	-1.25	-1.262	-1.213	-1.25	-1.287	V
	$I_{OUT} = 10\text{mA to } I_{MAX}$ $V_{IN} - V_{OUT} = 3\text{V to } V_{MAX}$ $P \leq P_{MAX}$ $T_J = 0 \text{ to } 125^\circ\text{C}$	-1.220	-1.25	-1.280	-1.200	-1.250	-1.300	V
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$ Line Regulation 1	$V_{IN} - V_{OUT} = 3\text{V to } V_{MAX}$ $T_J = 0 \text{ to } 125^\circ\text{C}$		0.005	0.010		0.010	0.040	%V
			0.010	0.030		0.020	0.070	
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$ Load Regulation 1	$I_{OUT} = 10\text{mA to } I_{MAX}$ $T_J = 0 \text{ to } 125^\circ\text{C}$	$V_{OUT} \leq 5\text{V}$		5	25	15	50	mV
		$V_{OUT} \geq 5\text{V}$		0.1	0.5	0.3	1	%
	$I_{OUT} = 10\text{mA to } I_{MAX}$ $T_J = 0 \text{ to } 125^\circ\text{C}$	$V_{OUT} \leq 5\text{V}$		10	50	20	70	mV
		$V_{OUT} \geq 5\text{V}$		0.2	1	0.3	1.5	%
Thermal Regulation	$t_p = 10\text{ms}$ $T_A = 25^\circ\text{C}$		0.002	0.020		0.003	0.04	%/W
Ripple Rejection	$V_{OUT} = 10\text{V}$ $f = 120\text{Hz}$	$C_{ADJ} = 0$		60	66	60		dB
		$C_{ADJ} = 10\mu\text{F}$ $T_J = 0 \text{ to } 125^\circ\text{C}$		70	80	66	77	dB
$I_{ADJ}$ Adjust Pin Current	$T_J = 0 \text{ to } 125^\circ\text{C}$		65	100		65	100	$\mu\text{A}$
$\Delta I_{ADJ}$ Adjust Pin Current Change	$T_J = 0 \text{ to } 125^\circ\text{C}$	$I_{OUT} = 10\text{mA to } I_{MAX}$		0.2	2	0.5	5	$\mu\text{A}$
		$V_{IN} - V_{OUT} = 3\text{V to } 40\text{V}$		1.0	5	2	5	
		$V_{IN} - V_{OUT} = 3\text{V to } 50\text{V}$ <b>(HV SERIES)</b>		2.0	6	3	6	
$I_{MIN}$ Minimum Load Current	$T_J = 0 \text{ to } 125^\circ\text{C}$	$V_{IN} - V_{OUT} \leq 40\text{V}$		2.5	5	2.5	10	mA
		$V_{IN} - V_{OUT} \leq 10\text{V}$		1.2	3	1	6	
$I_{CL}$ Current Limit	$T_J = 0 \text{ to } 125^\circ\text{C}$	$V_{IN} - V_{OUT} \leq 15\text{V}$		1.5	2.2	3.5	3.5	A
		$V_{IN} - V_{OUT} = 40\text{V}$		0.24	0.4	1	0.15	
		$V_{IN} - V_{OUT} = 50\text{V}$ <b>(HV SERIES)</b>		0.2	0.4	0.8	0.1	
$\frac{\Delta V_{OUT}}{\Delta \text{TEMP}}$ Temperature Stability	$T_J = 0 \text{ to } 125^\circ\text{C}$		0.6	1.5		0.6		%
$\frac{\Delta V_{OUT}}{\Delta \text{TIME}}$ Long Term Stability	$t = 1000 \text{ Hrs}$		0.3	1		0.3	1	%
$e_n$ RMS Output Noise (% of $V_{OUT}$ )	$f = 10 \text{ Hz to } 10 \text{ kHz}$ $T_A = 25^\circ\text{C}$		0.003			0.003		%
$R_{\theta JC}$ Thermal Resistance Junction to Case	K Package		2.3	3		2.3	3	$^\circ\text{C/W}$
	T Package		4	5		4		
	LCC4 Package			13			13	

1) Regulation is measured at constant junction temperature, using pulse testing at a low duty cycle. Changes in output voltage due to heating effects are covered under thermal regulation specifications. Load regulation is measured at a point  $\frac{1}{8}$ " from the bottom of the package for the TO-3 and TO-66 packages, at the junction of the wide and narrow portion of the output lead for the SMD packages, and  $\frac{1}{8}$ " below the base of the package on the output pin of the TO-257 package.

2) Test Conditions unless otherwise stated:

$$V_{IN} - V_{OUT} = 5\text{V}, I_{OUT} = 0.5\text{A}, P_{MAX} = 20\text{W}, I_{MAX} = 1.5\text{A}$$

$$V_{MAX} = 40\text{V for standard series, } 50\text{V for HV series.}$$

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

**Semelab plc.** Telephone +44(0)1455 556565. Fax +44(0)1455 552612.

E-mail: [sales@semelab.co.uk](mailto:sales@semelab.co.uk) Website: <http://www.semelab.co.uk>


Document Number 2831

Issue 3

## APPLICATIONS INFORMATION

### High Stability Regulator

The output stability, load regulation, line regulation, thermal regulation, temperature drift, long term drift, and noise, can be improved by a factor of 6.6 over the standard regulator configuration. This assumes a zener has 20PPM/°C maximum drift and about 10 times lower noise than the regulator.

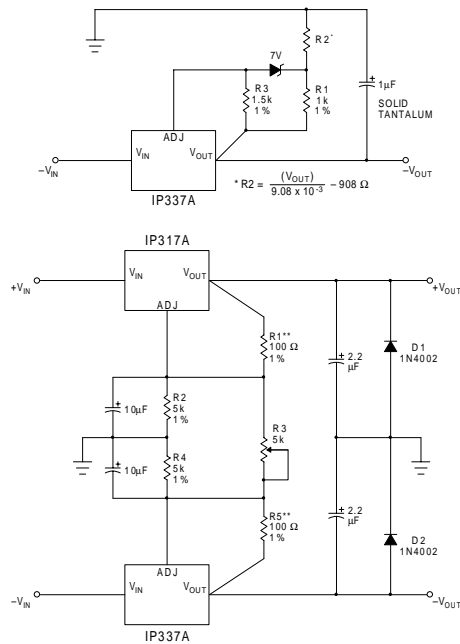



\* Solid Tantalum  
\*\* R1 or R5 may be trimmed slightly to improve tracking.

### Dual Tracking Supply

### Multiple Tracking Regulators

In the application shown below, regulator #2 to "N" will track regulator #1 to within  $\pm 24\text{mV}$  initially, and to  $\pm 60\text{mV}$  over all load, line, and temperature conditions.

If any regulator output is shorted to ground, all other outputs will drop to  $-2\text{V}$ . Load regulation of regulators 2 to "N" will be improved by  $V_{\text{OUT}} / 1.25\text{V}$  compared to a standard regulator, so regulator #1 should be the one which has the lowest load current.

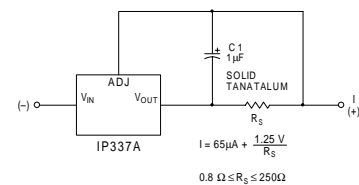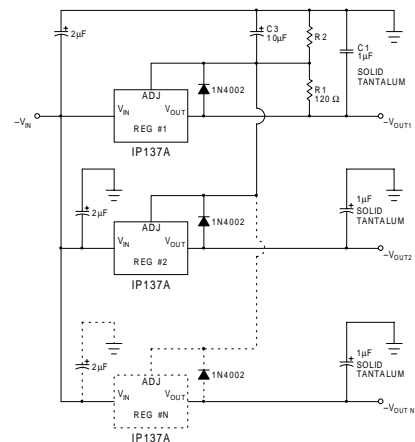

### Current Regulator

## Order Information

Part Number	IG-Pack G-Pack (TO257)	SMD1	SMD05	LCC4	K-Pack (TO3)	R-Pack (TO66)	T-Pack (TO220)	Temp. Range
LM137	✓	✓	✓	✓	✓	✓		-55 to +150°C
LM137HV	✓	✓	✓	✓	✓	✓		"
LM137A	✓	✓	✓	✓	✓	✓		"
LM137AHV	✓	✓	✓	✓	✓	✓		"
IP137	✓	✓	✓	✓	✓	✓		"
IP137HV	✓	✓	✓	✓	✓	✓		"
IP137A	✓	✓	✓	✓	✓	✓		"
IP137AHV	✓	✓	✓	✓	✓	✓		"
LM337					✓		✓	0 to 125°C
LM337HV					✓		✓	"
IP337					✓		✓	"
IP337HV					✓		✓	"
IP337A					✓		✓	"
IP337AHV					✓		✓	"

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.