


BZV58 C10...BZV58 C200 (5W)

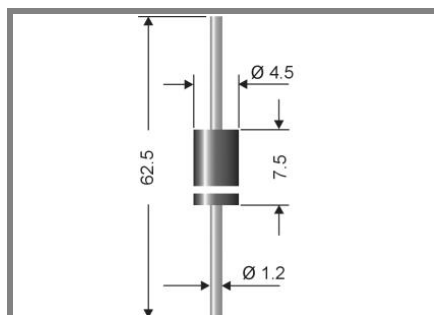

Axial lead diode

Zener silicon diodes

BZV58 C10...BZV58 C200 (5W)

**Maximum Power
Dissipation: 5 W**

Nominal Z-voltage: 10 to 200 V

Features

- Max. solder temperature: 260°C
- Plastic material has UL classification 94V-0
- Standard Zener voltage tolerance is graded to the international E 24 (5%) standard. Other voltage tolerances and higher Zener voltages on request.

Mechanical Data

- Plastic case DO-201
- Weight approx.: 1 g
- Terminals: plated terminals solderable per MIL-STD-750
- Mounting position: any
- Standard packaging: 1700 pieces per ammo

1) Valid, if leads are kept at ambient temperature at a distance of 10 mm from case

2) Tested with pulses

Absolute Maximum Ratings T_c = 25 °C, unless otherwise specified			
Symbol	Conditions	Values	Units
P _{tot}	Power dissipation, T _A = 25 °C ¹⁾	5	W
P _{ZSM}	Non repetitive peak power dissipation, t < 10 ms	60	W
R _{thA}	Max. thermal resistance junction to ambient	25	K/W
R _{thT}	Max. thermal resistance junction to terminal	8	K/W
T _j	Operating junction temperature	-50...+150	°C
T _s	Storage temperature	-50...+175	°C

Type	Zener Voltage ²⁾ V _Z @I _{ZT}		Test curr. I _{ZT} mA	Dyn. Resistance Z _{ZT} @I _{ZT} Ω	Temp. Coeffiz. of V _Z a _{VZ} 10 ⁻⁴ /°C	Z- curr. ¹⁾ T _A = 50 °C	
	V _{Zmin} V	V _{Zmax} V				I _R μA	I _{Zmax} mA
BZV58C10	9,4	10,6	125	<2	+5...+9	5	<7,6
BZV58C11	10,4	11,6	125	<2,5	+5...+10	5	<8,3
BZV58C12	11,4	12,7	100	<2,5	+5...+10	2	<9,1
BZV58C13	12,4	14,1	100	<2,5	+5...+10	1	<9,9
BZV58C15	13,8	15,6	75	<2,5	+5...+10	1	<11,4
BZV58C16	15,3	17,1	75	<2,5	+6...+11	1	<12,2
BZV58C18	16,8	19,1	65	<2,5	+6...+11	1	<13,7
BZV58C20	18,8	21,2	65	<3	+6...+11	1	<15,2
BZV58C22	20,8	23,3	50	<3,5	+6...+11	1	<16,7
BZV58C24	22,8	25,6	50	<3,5	+6...+11	1	<18,2
BZV58C27	25,1	28,9	50	<5	+6...+11	1	<20,5
BZV58C30	28	32	40	<8	+6...+11	1	<22,8
BZV58C33	31	35	40	<10	+6...+11	1	<25
BZV58C36	34	38	30	<11	+6...+11	1	<27,4
BZV58C39	37	41	30	<14	+6...+11	1	<29,6
BZV58C43	40	46	30	<20	+7...+12	1	<32,7
BZV58C47	44	50	25	<25	+7...+12	1	<35,7
BZV58C51	48	54	25	<27	+7...+12	1	<38,8
BZV58C56	52	60	20	<35	+7...+12	1	<42,5
BZV58C62	58	66	20	<42	+8...+13	1	<47,1
BZV58C68	64	72	20	<44	+8...+13	1	<51,7
BZV58C75	70	79	20	<45	+8...+13	1	<57
BZV58C82	77	88	15	<65	+8...+13	1	<62,4
BZV58C91	85	96	15	<75	+9...+13	1	<69,2
BZV58C100	94	106	12	<90	+9...+13	1	<76
BZV58C110	104	116	12	<125	+9...+13	1	<83,5
BZV58C120	114	127	10	<170	+9...+13	1	<91,2
BZV58C130	124	141	10	<190	+9...+13	1	<98,8
BZV58C150	138	156	8	<330	+9...+13	1	<114
BZV58C160	153	171	8	<350	+9...+13	1	<122
BZV58C180	168	191	5	<430	+9...+13	1	<137
BZV58C200	188	212	5	<480	+9...+13	1	<152