


V_{RSM}	I_{FRMS} (maximum value for continuous operation)			
V_{RRM}	110 A		325 A	
	I_{FAV} (sin. 180; $T_{case} = 85\text{ }^{\circ}\text{C}$; 50 Hz)			
V	48,5 A		207 A	
100	SKKD 50 E 01	SKND 50 E 01	SKMD 202 E 01	SKND 202 E 01
200	SKKD 50 F 02	SKND 50 E 02	SKMD 202 E 02	SKND 202 E 02
300	SKKD 50 E 03	SKND 50 E 03	SKMD 202 E 03	SKND 202 E 03
400	SKKD 50 E 04	SKND 50 E 04	—	—

Ultrafast Epitaxial Diode Modules

SEMIPACK® 1
SKKD 50 E SKND 50 E

SEMIPACK® 2
SKMD 202 E SKND 202 E

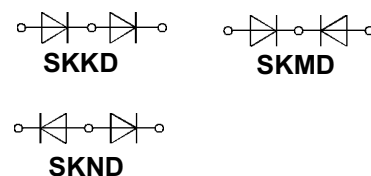

Features

- Isolated metal baseplate
- Very short recovery times
- Low switching losses
- Up to 400 V peak inverse voltage
- **SKKD** half bridge or centre tap connections:
SKMD common cathode
SKND common anode
- UL recognized, file no. E 63 532

Typical Applications

- Switched mode power converters
- Invers diode for transistors in AC and DC motor controls
- Uninterruptible power supplies (UPS)

Symbol	Conditions	SKKD 50 E SKND 50 E	SKMD 202 E SKND 202 E	Units
I_{FAV}	sin. 180; $T_{case} = 85\text{ °C}$	48,5	207	A
I_{FSM}	$T_{vj} = 25\text{ °C}$	800	3 200	A
	$T_{vj} = 150\text{ °C}$	700	2 800	A
i^2t	$T_{vj} = 25\text{ °C}$	3 200	51 000	A ² s
	$T_{vj} = 150\text{ °C}$	2 450	39 000	A ² s
t_{rr}	$T_{vj} = 25\text{ °C}$; $I_F = 1\text{ A}$; – $di_F/dt = 15\text{ A/}\mu\text{s}$; $V_R = 30\text{ V}$, $I_{rr} = 0,25\text{ }I_{RM}$	60	140	ns
Q_{rr}	$T_{vj} = 150\text{ °C}$; $I_F = 50\text{ A}$; – $di_F/dt = 100\text{ A/}\mu\text{s}$; $V_R = 100\text{ V}$	0,7	2	μC
I_{RM}		10	16	A
I_R	$T_{vj} = 25\text{ °C}$; $V_R = V_{RRM}$	0,2	2	mA
I_R	$T_{vj} = 130\text{ °C}$; $V_R = V_{RRM}$	40	100	mA
V_F	$T_{vj} = 25\text{ °C}$; ($I_F = \dots$); max.	1,6 (120 A)	1,65 (500 A)	V
$V_{(TO)}$	$T_{vj} = 150\text{ °C}$	0,8	0,8	V
r_T	$T_{vj} = 150\text{ °C}$	6,5	1,5	m Ω
R_{thjc}	per diode / per module	0,85 / 0,43	0,2 / 0,1	$^{\circ}\text{C/W}$
R_{thch}	per diode / per module	0,2 / 0,1	0,1 / 0,05	$^{\circ}\text{C/W}$
T_{vj}		– 40 ... + 150		$^{\circ}\text{C}$
T_{stg}		– 40 ... + 125		$^{\circ}\text{C}$
V_{isol}	a. c. 50 Hz; r.m.s; 1 s/1 min	3000 / 2500		V~
M_1	to heatsink to terminals } SI (US) units	5 (44 lb. in.) $\pm 15\%$		Nm
M_2		3 (26 lb. in.) $\pm 15\%$		Nm
w	approx.	120	250	g
Case	SKKD	A 20 A	–	
	SKMD	–	A 51	
	SKND	A 19	A 52	

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

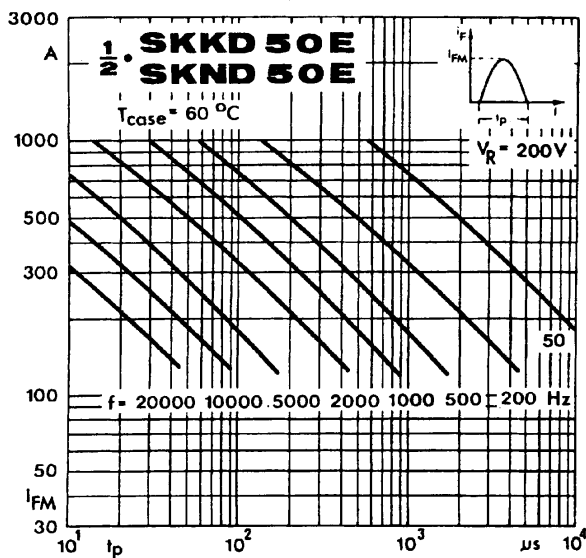


Fig. 12 a Rated sinusoidal peak forward current

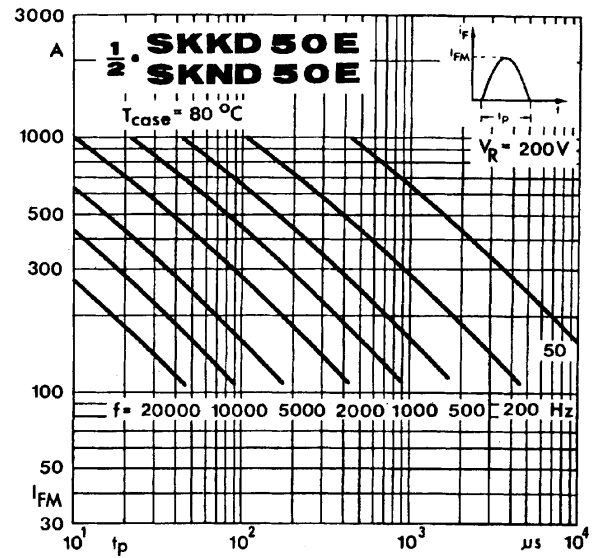


Fig. 12 b Rated sinusoidal peak forward current

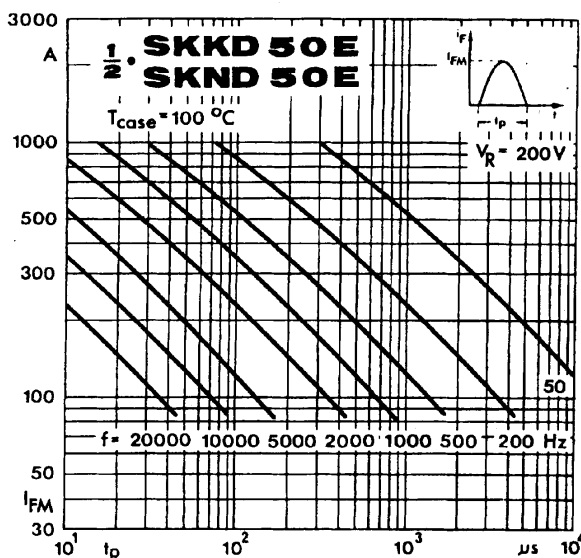


Fig. 12 c Rated sinusoidal peak forward current

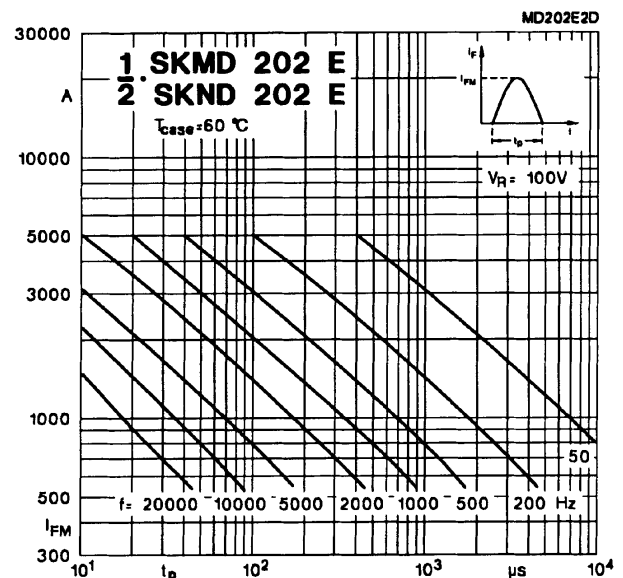


Fig. 12 d Rated sinusoidal peak forward current

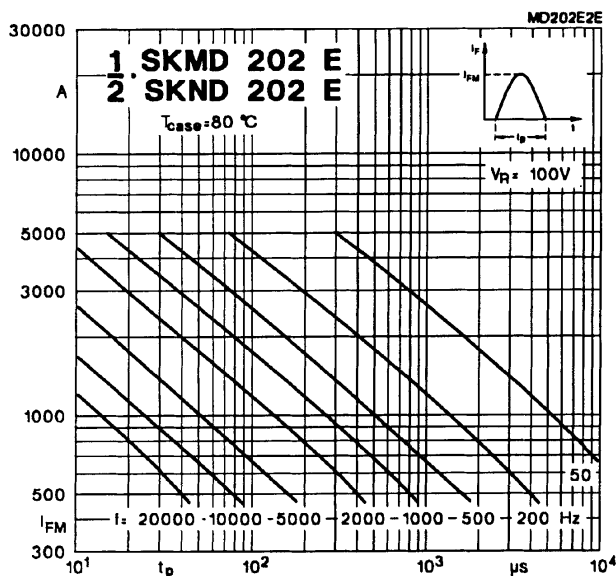


Fig. 12 e Rated sinusoidal peak forward current

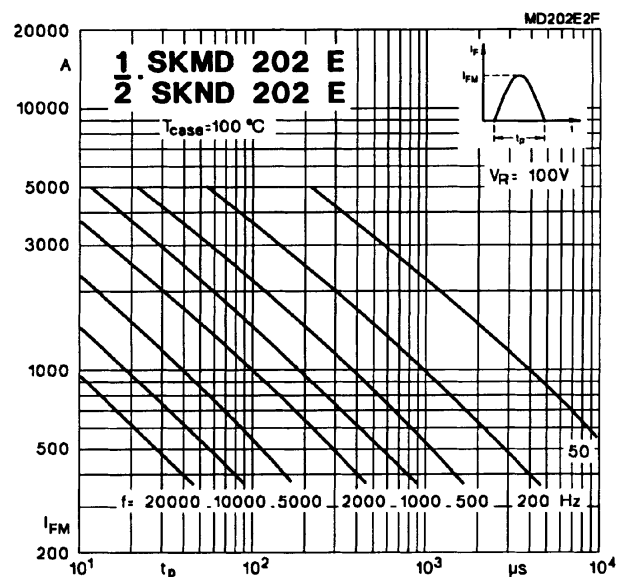
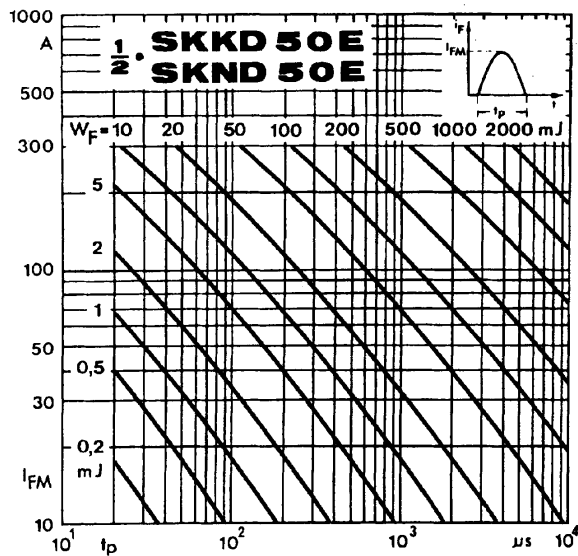


Fig. 12 f Rated sinusoidal peak forward current



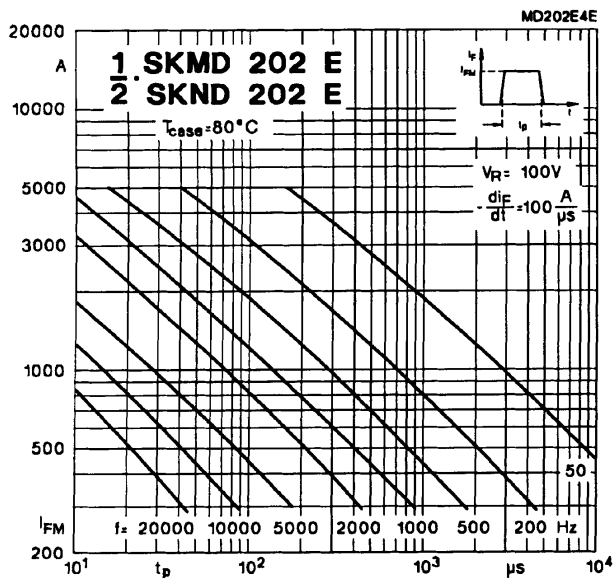


Fig. 14 e Rated rectangular peak forward current

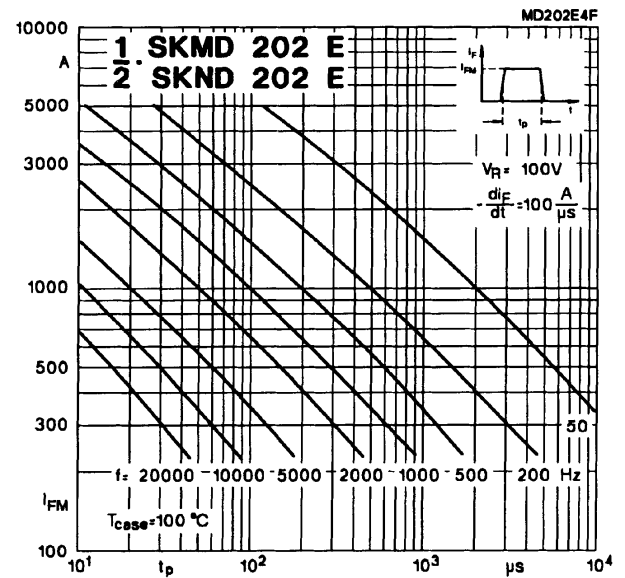


Fig. 14 f Rated rectangular peak forward current

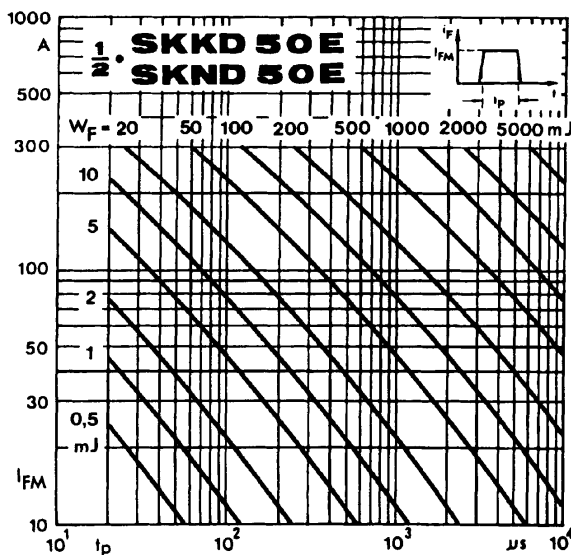


Fig. 15 a Forward energy dissipation, rectangular

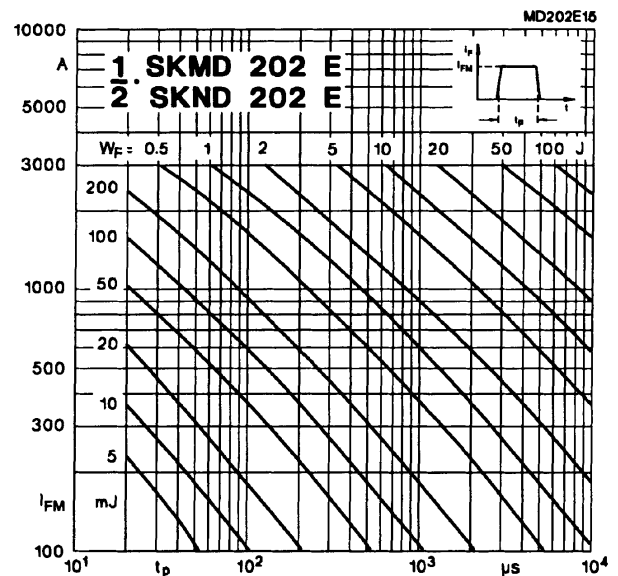


Fig. 15 b Forward energy dissipation, rectangular

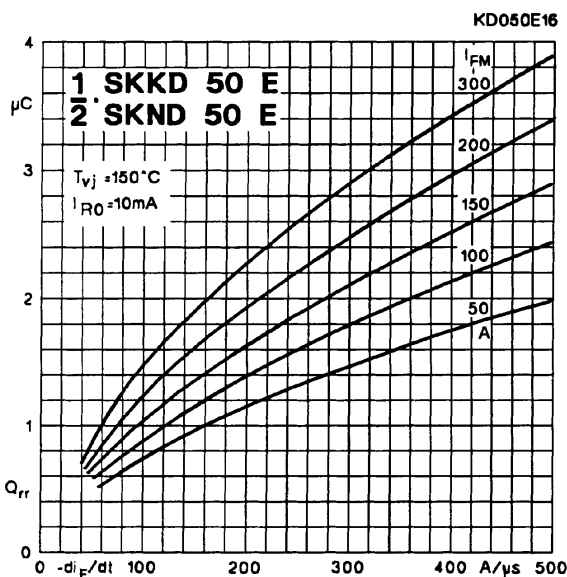


Fig. 16 a Recovered charge vs. current decrease

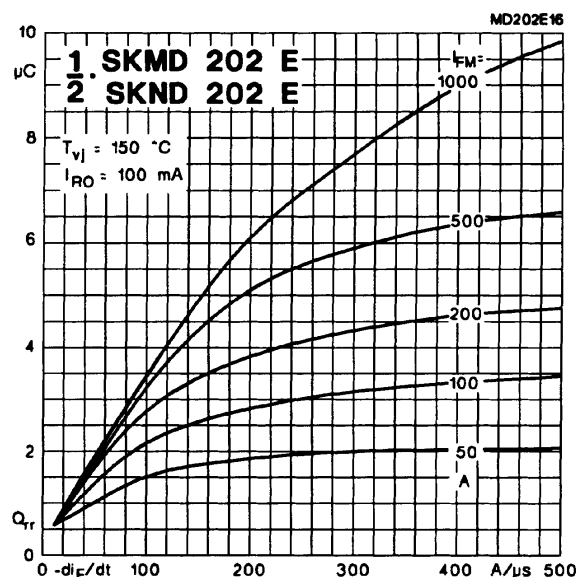


Fig. 16 b Recovered charge vs. current decrease

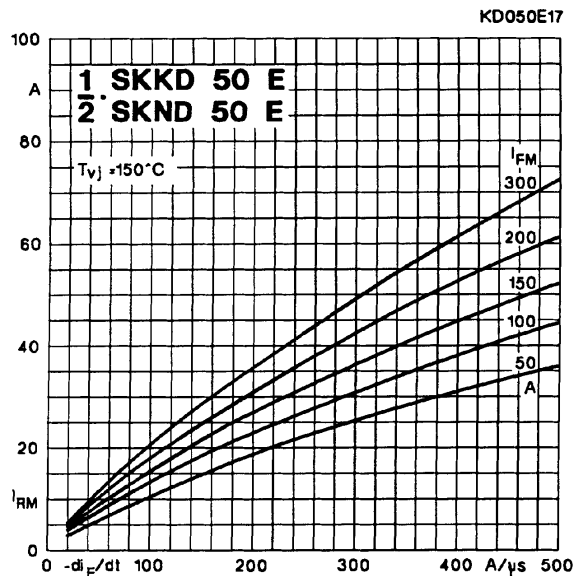


Fig. 17 a Peak recovery current vs. current decrease

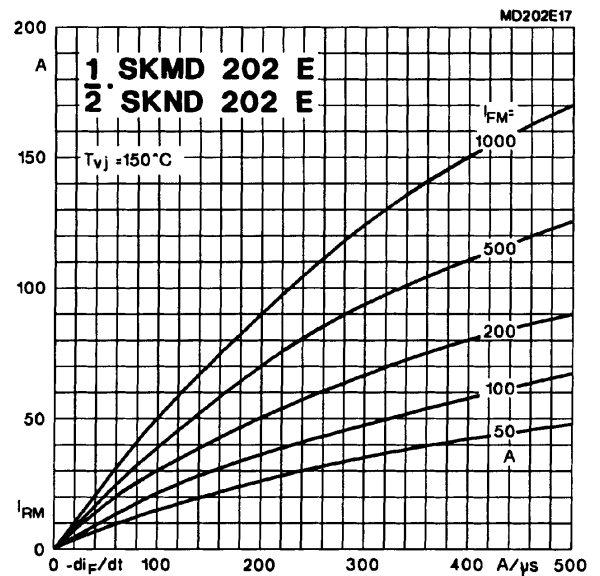


Fig. 17 b Peak recovery current vs. current decrease

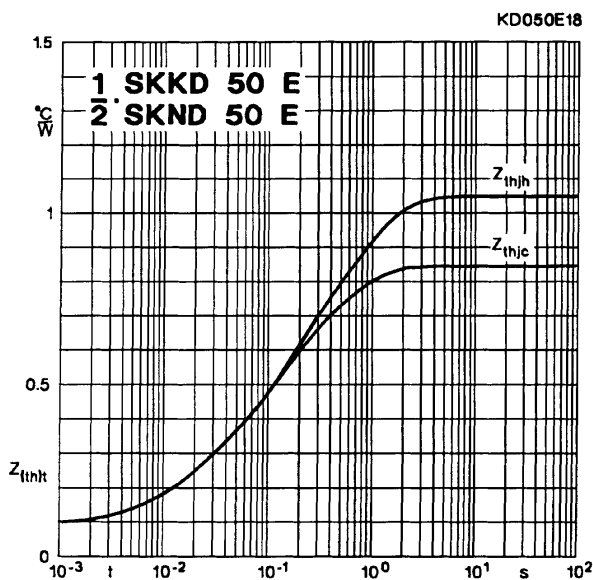


Fig. 18 a Transient thermal impedance vs. time

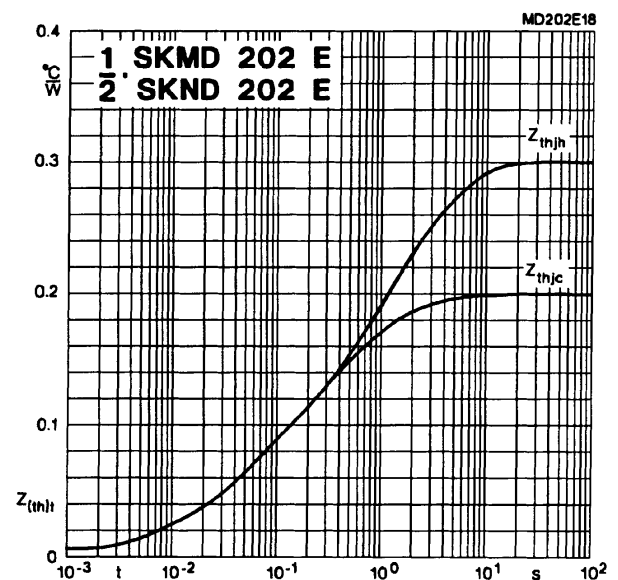


Fig. 18 b Transient thermal impedance vs. time

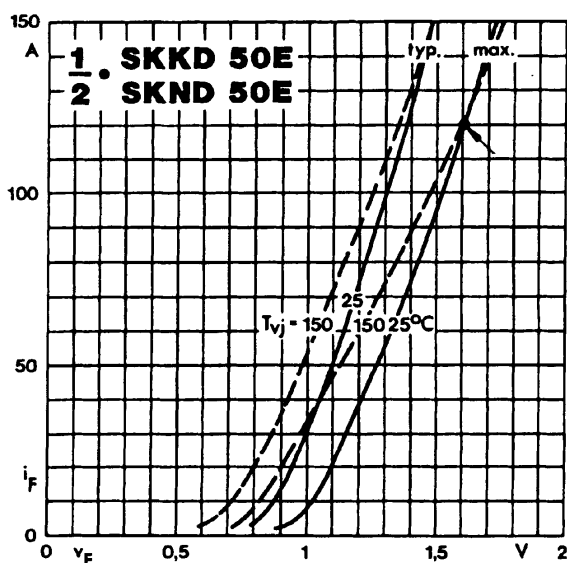


Fig. 19 a Forward characteristics

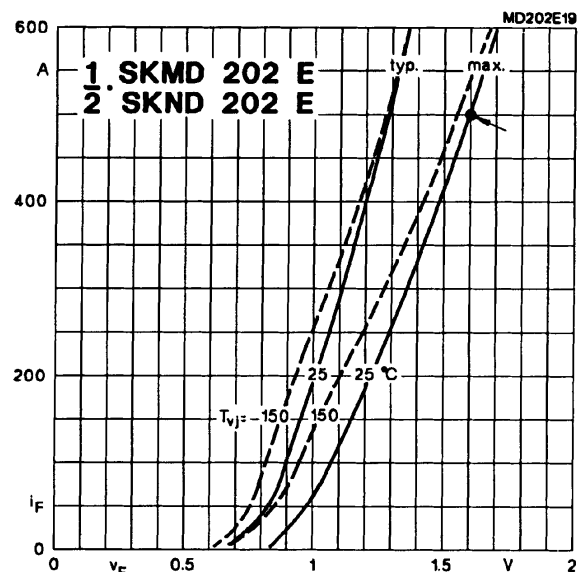


Fig. 19 b Forward characteristics


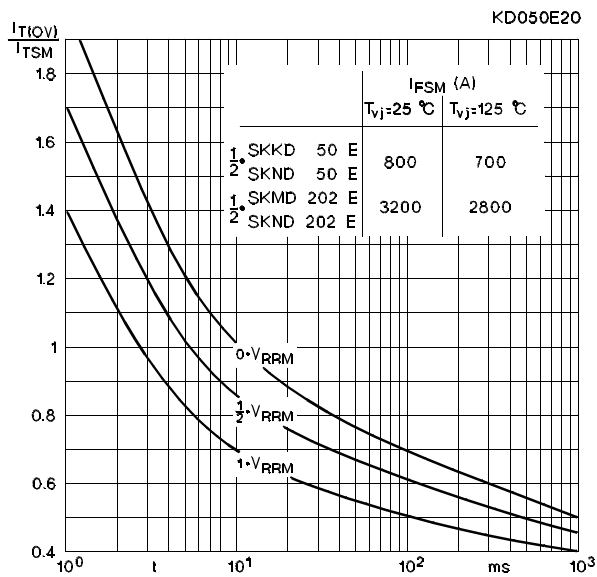



Fig. 20 Surge overload current vs. time

SKND 50 E IEC 192-2: A 77 A
 Case A 19 JEDEC: TO-240 AA
 SEMIPACK® 1 UL recognized, file no. E 63 532

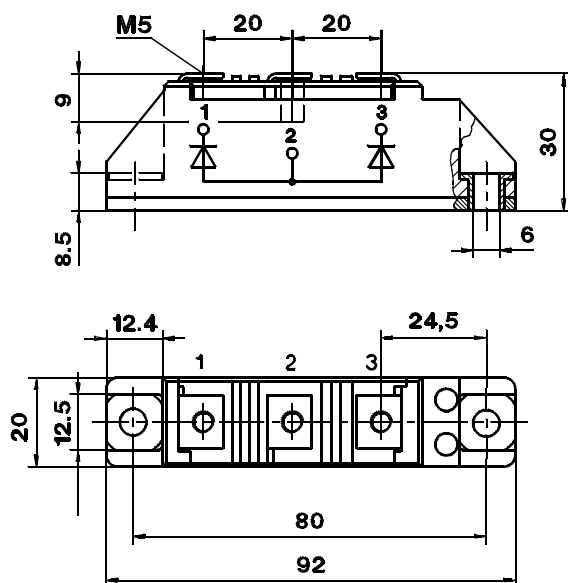

Dimensions in mm

SKKD 50 E
 Case A 20 A

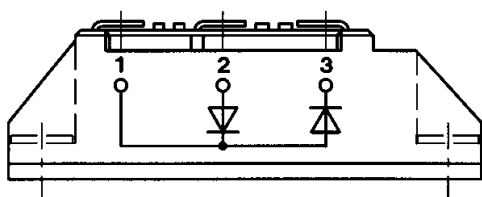


SKKD 105 F, 115 F

Case A 10

IEC 192-2: A 77 A
JEDEC: TO-240 AA

SEMIPACK® 1


UL recognized, file no. E 63 532

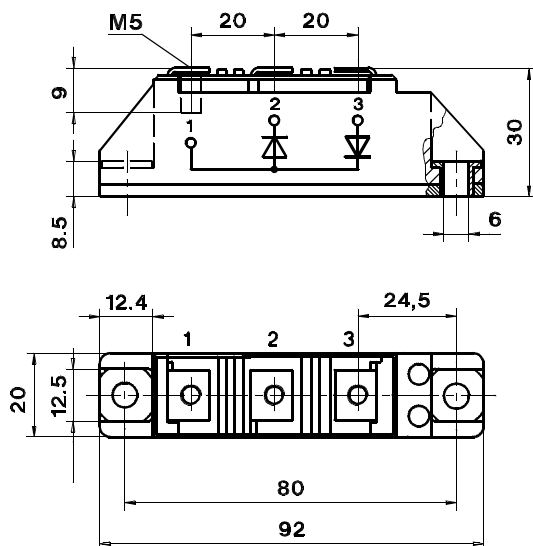**SKKD 60 F, 75 F**


Case A 23

SEMIPACK® 2


UL recognized, file no. E 63 532

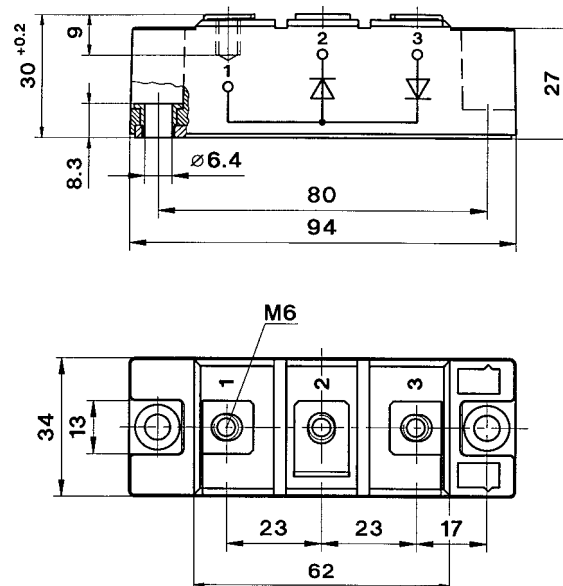**SKMD 105 F**


Case A 33

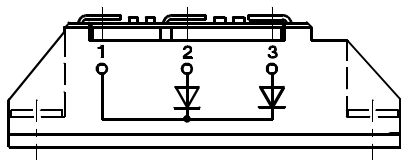**SKMD 150 F, 202 E**


Case A 51

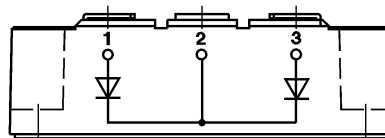**SKND 105 F**

Case A 37

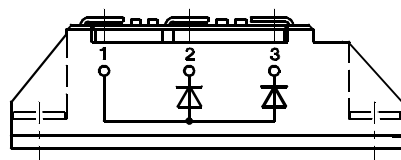**SKND 150 F, 202 E**


Case A 52

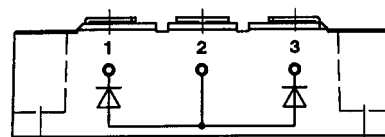

Dimensions in mm

SKKD 150 F, 170 F

Case A 53

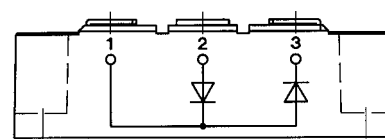

Dimensions in mm