

June 7, 1999

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

DESCRIPTION


The EZ1084 series of high performance positive voltage regulators are designed for use in applications requiring low dropout performance at full rated current. Additionally, the EZ1084 series provides excellent regulation over variations in line, load and temperature.

Outstanding features include low dropout performance at rated current, fast transient response, internal current limiting and thermal shutdown protection of the output device. The EZ1084 has both fixed and adjustable voltage options, while the EZ1084B is adjustable only for cost sensitive applications. These devices are available in the popular TO-220 and TO-263 packages.


APPLICATIONS

- High current microprocessor supplies
- Post regulators

BLOCK DIAGRAM

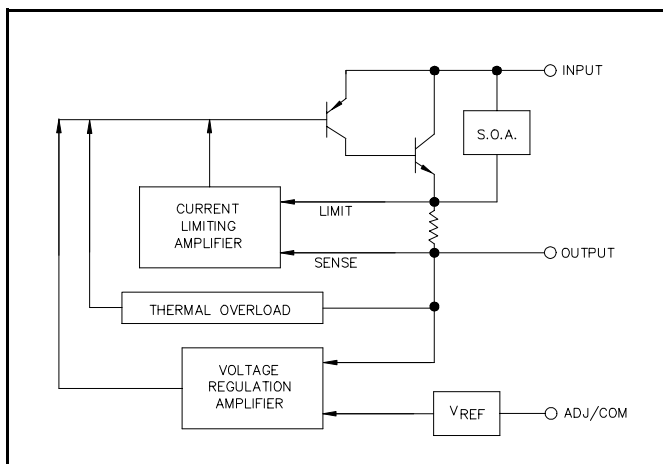

PIN CONFIGURATIONS

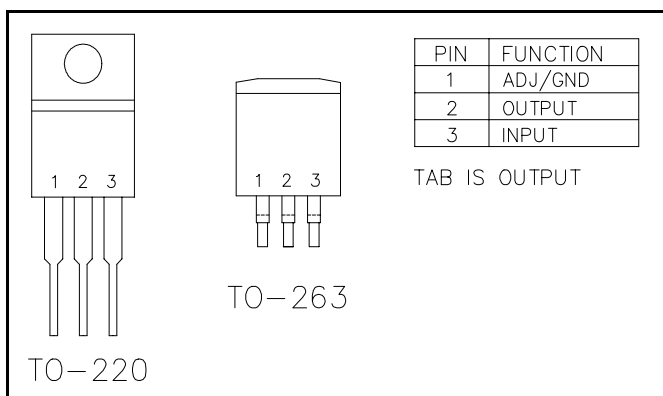

FEATURES

- Low dropout performance, 1.3V max. for EZ1084, 1.45V max. for EZ1084B
- Full current rating over line and temperature
- Fast transient response
- $\pm 2\%$ total output regulation over line, load and temperature ($\pm 2.4\%$ for EZ1084B)
- Adjust pin current max 90 μ A over temperature
- Fixed/adjustable output voltage (EZ1084)
- Line regulation typically 0.015%
- Load regulation typically 0.05%
- TO-220 and TO-263 packages

ORDERING INFORMATION

| DEVICE | PACKAGE | V _{OUT} VOLTS |
|---------------------------|-----------------------|-----------------------------|
| EZ1084CM-X.X EZ1084BCM | TO-263 ⁽²⁾ | See Note (1) 1.30 to 5.7 |
| EZ1084CT-X.X EZ1084BCT | TO-220 | See Note (1) 1.30 to 5.7 |

Notes:

(1) Where X.X denotes voltage options. Available voltages are: 1.5V, 2.5V and 3.3V. Leave blank for adjustable version (1.3 to 5.7V). Contact factory for additional voltage options.

(2) Add suffix 'TR' for tape and reel (TO-263).

ABSOLUTE MAXIMUM RATINGS

| Parameter | Symbol | Maximum | Units |
|--|-------------------|--------------------|-------|
| Input Supply Voltage | V _{IN} | 7 | V |
| Power Dissipation | P _D | Internally Limited | W |
| Thermal Resistance Junction to Case TO-220 TO-263 | θ_{JC} | 2.5 2.5 | °C/W |
| Thermal Resistance Junction to Ambient TO-220 TO-263 | θ_{JA} | 50 60 | °C/W |
| Operating Junction Temperature Range | T _J | 0 to 125 | °C |
| Storage Temperature Range | T _{STG} | -65 to 150 | °C |
| Lead Temperature (Soldering) 10 Sec | T _{LEAD} | 260 | °C |

June 7, 1999

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, Adj V_{IN} = 2.75V to 7.0V and Adj I_O = 10mA to 5.0A;
Fixed V_{IN} = 4.75 to 7.0V and Fixed I_O = 0 mA to 5.0A

| | | Test Conditions | | | Test Limits | | | |
|---|------------------|-----------------|-------|-------------|-------------|-------|------------|---------|
| Parameter | Symbol | V_{IN} | I_O | $T_J^{(5)}$ | Min | Typ | Max | Units |
| Output Voltage ⁽¹⁾ EZ1084-X.X | V_O | 5V | 0mA | 25°C | 0.99 V_O | V_O | 1.01 V_O | V |
| | | | | O.T. | 0.98 V_O | V_O | 1.02 V_O | |
| Reference Voltage ⁽¹⁾ EZ1084 | V_{REF} | 5V | 10mA | 25°C | 1.238 | 1.250 | 1.262 | V |
| | | | | O.T. | 1.225 | 1.250 | 1.275 | |
| Reference Voltage ⁽¹⁾ EZ1084B | V_{REF} | 5V | 10mA | 25°C | 1.233 | 1.250 | 1.267 | V |
| | | | | O.T. | 1.220 | 1.250 | 1.280 | |
| Line Regulation ⁽¹⁾ | $REG_{(LINE)}$ | | 10mA | 25°C | | 0.015 | 0.2 | % |
| | | | | O.T. | | 0.035 | 0.2 | |
| Load Regulation ⁽¹⁾ | $REG_{(LOAD)}$ | 5V | | 25°C | | 0.05 | 0.3 | % |
| | | | | O.T. | | 0.2 | 0.4 | |
| Dropout Voltage ⁽²⁾ EZ1084, EZ1084-X.X EZ1084B | V_D | | | 25°C | | 1 | | V |
| | | | | O.T. | | 1.10 | 1.30 | |
| | | | | | | 1.20 | 1.45 | |
| Current Limit | I_{CL} | | | O.T. | 5.0 | 7.5 | | A |
| Quiescent Current Fixed Voltage Version | I_Q | 5V | | O.T. | | 12 | 14 | mA |
| Temperature Coefficient | T_C | | | O.T. | | 0.005 | | %/°C |
| Adjust Pin Current | I_{ADJ} | | | 25°C | | 55 | | μA |
| | | | | O.T. | | | 90 | |
| Adjust Pin Current Change | ΔI_{ADJ} | | | O.T. | | 0.2 | 5 | μA |
| Temperature Stability | T_S | 5V | 0.5A | O.T. | | 0.5 | | % |
| Minimum Load Current Adj Voltage Version | I_O | 5V | | O.T. | | 5 | 10 | mA |
| RMS Output Noise ⁽³⁾ | V_N | | | 25°C | | 0.003 | | % V_O |
| Ripple Rejection Ratio ⁽⁴⁾ | R_A | 5V | 5.0A | O.T. | 60 | 72 | | dB |


NOTES:

- (1) Low duty cycle pulse testing with Kelvin connections required.
- (2) ΔV_{OUT} , ΔV_{REF} = 1%
- (3) Bandwidth of 10 Hz to 10 kHz.
- (4) 120 Hz input ripple (C_{ADJ} for ADJ = 25μF).
- (5) Over Temp. (O.T.) = over specified operating junction temperature range.

June 7, 1999


TYPICAL APPLICATIONS

FIXED VOLTAGE REGULATOR ⁽¹⁾⁽²⁾

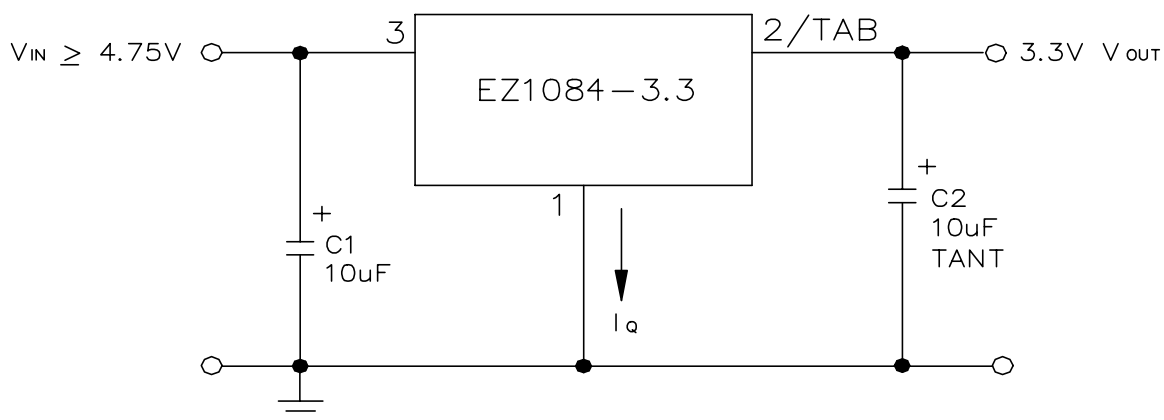

- (1) C1 NEEDED IF DEVICE IS FAR FROM FILTER CAPACITORS.
 (2) C2 REQUIRED FOR STABILITY.


ADJUSTABLE VOLTAGE REGULATOR ⁽¹⁾⁽²⁾

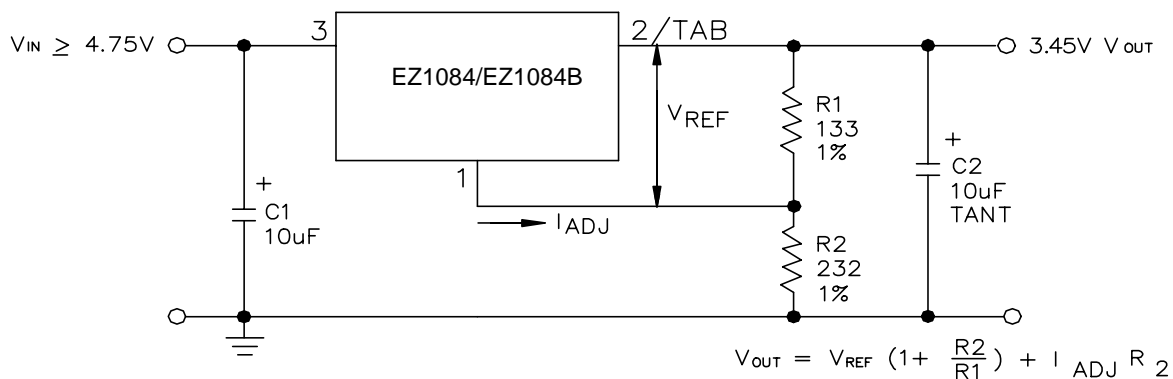

- (1) C1 NEEDED IF DEVICE IS FAR FROM FILTER CAPACITORS.
 (2) C2 REQUIRED FOR STABILITY.

June 7, 1999

DEVICE OUTLINE - TO-220

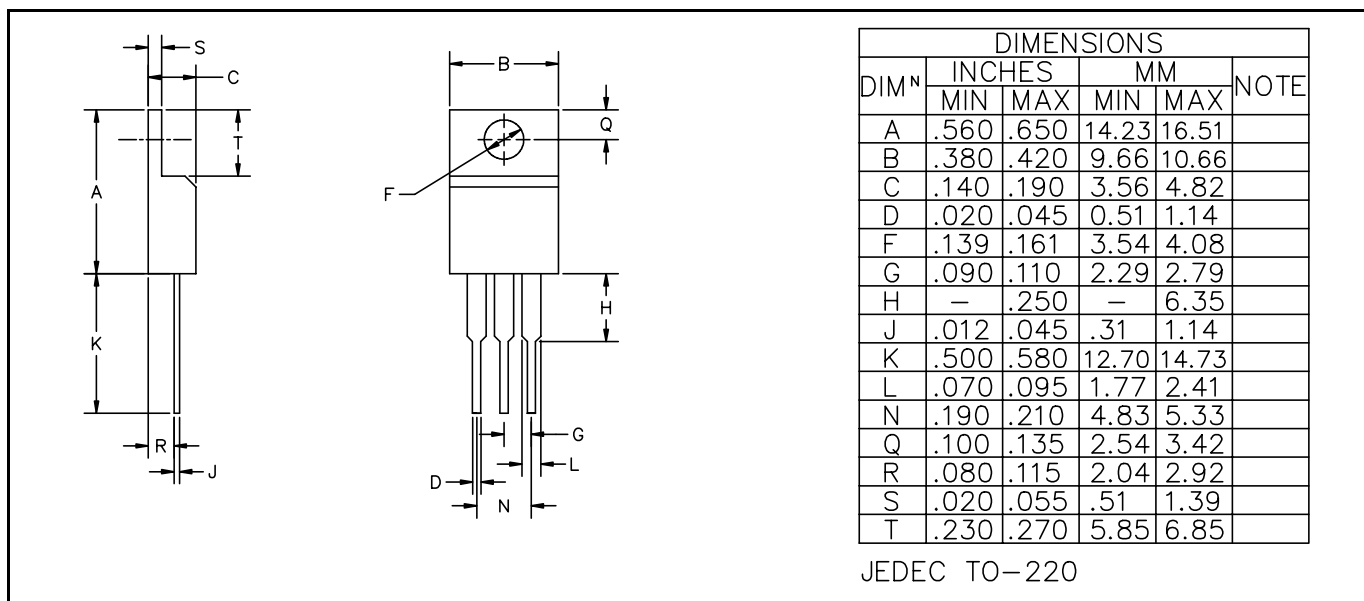

DEVICE OUTLINE - TO-263

