

January 9, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

HIGH VOLTAGE, HIGH CURRENT, STANDARD RECOVERY DOUBLER AND CENTER TAPS

- Up to 12kV reverse voltage
- Air or oil environment
- Low reverse leakage currents
- High forward current and surge ratings
- Integral cooling fins

QUICK REFERENCE DATA


- $V_R = 2kV - 12kV$
- $I_F = 30 - 40A$ (in oil)
- $I_R = 4.0\mu A$
- $I_{FSM} = 500A$

ABSOLUTE MAXIMUM RATINGS (apply per leg)

Device Type	Working Reverse Voltage V_{RWM}	Average Rectified Current				1 Cycle Surge Current $t_p = 8.3mS$		Repetitive Surge Current	I^2t $t_p = 8.3mS$
		air @ 25 °C	air @ 65 °C	forced air 600CFM @ 55 °C	in oil @ 25 °C	@ 25 °C	@ 100 °C	@ 25 °C	@ 25 °C
	Volts	Amps	Amps	Amps	Amps	Amps	Amps	Amps	A ² S
S4KW2C-1*	2000	16	11	16	40	↑	↑	↑	↑
S4KW4C-2*	4000	12	8	12	30	↑	↑	↑	↑
S4KW6C-3*	6000	12	8	12	30	500	400	80	975
S4KW8C-4*	8000	12	8	12	30	↓	↓	↓	↓
S4KW10C-5*	10000	12	8	12	30	↓	↓	↓	↓
S4KW12C-6*	12000	12	8	12	30	↓	↓	↓	↓

* add suffix for desired circuit arrangement
D = doubler, N = Negative center tap, P = positive center tap
($I_O \times 0.5$ for doubler)

MECHANICAL

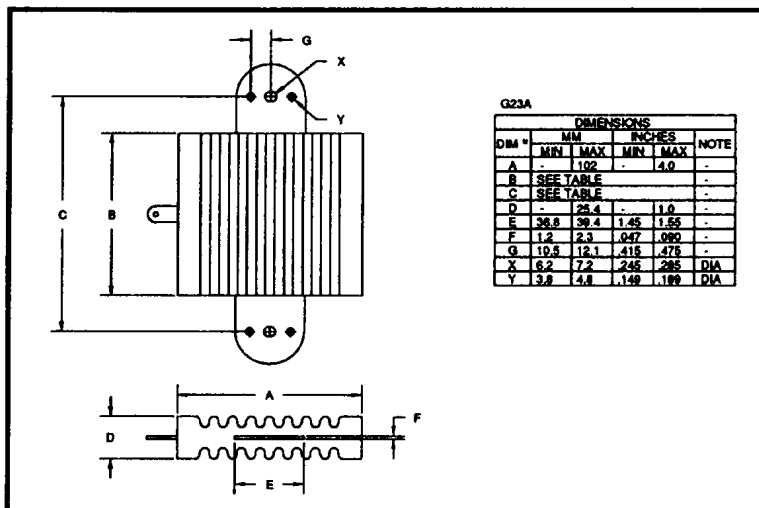

Dimensions (see drawing)	
B ±0.030"	C ±0.030"
inches	inches
4.78	6.48
7.98	9.68
11.18	12.88
14.38	16.08
17.58	19.28
20.78	22.48

January 9, 1998

CHARACTERISTICS (apply per leg)

Device Type	Reverse Current @ V_{RWM}		Maximum Forward Voltage V_F @ 12A @ 25°C	Maximum Reverse Recovery Time ¹ t_{rr} @ 25°C
	@ 25 °C	@ 100 °C		
	μA	μA	Volts	μS
S4KW2C-1*	4.0	80	2.00	2.0
S4KW4C-2*			4.00	
S4KW6C-3*			6.00	
S4KW8C-4*			8.00	
S4KW10C-5*			10.0	
S4KW12C-6*			12.0	

¹ Measured on discrete devices prior to assembly

Operating temperature range -55 °C to +150 °C
Storage temperature range -55 °C to +150 °C

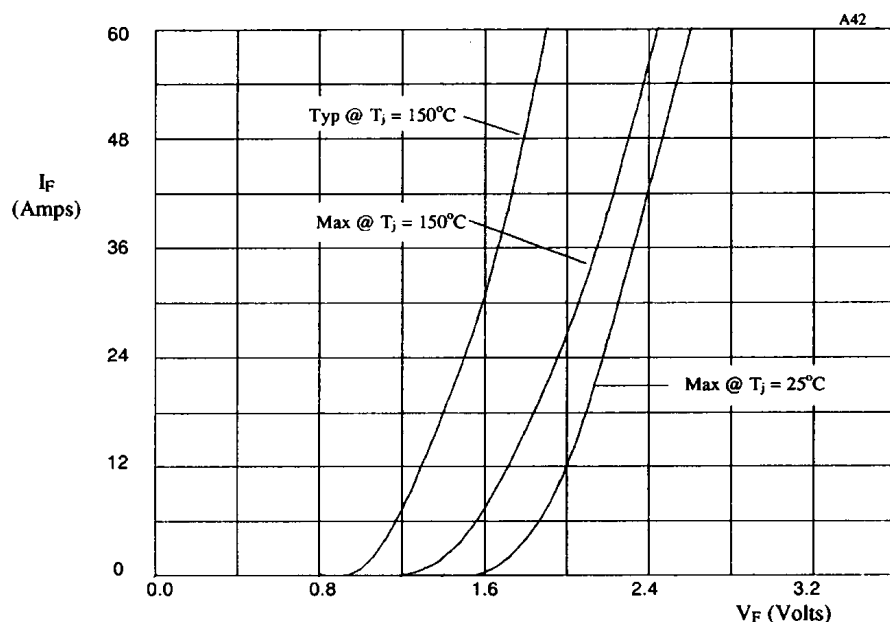


Figure 1. Forward voltage drop per leg as a function of forward current for use with table 1.

TABLE I

DEVICE	X-axis
S4KW2C-1*	x1
S4KW4C-2*	x2
S4KW6C-3*	x3
S4KW8C-4*	x4
S4KW10C-5*	x5
S4KW12C-6*	x6