

Features

- 20 cm [7.7"] VGA format
- Thin structure (9.5 mm) & lightweight (310 g)
- Built-in touch panel and CCFT backlight
- Low power consumption (1.6 W)

Specifications


Parameter		Unit
Display size	20 [7.7]	cm ["]
Dot format (H x V)	640 x RGB x 480	dot
Dot pitch (H x V)	0.082 x 0.246	mm
Active area (H x V)	157.4 x 118.0	mm
Panel type	*1	-
Panel mode	Transmissive	-
Contrast ratio	40 : 1	-
Response time	350	ms
Brightness	55	cd/m ²

*1...Triple Super Twisted Nematic

Parameter		Unit
Backlight type	1CCFT(E)	-
Duty ratio	1/240	-
Logic voltage	3.3 Vcon	V
Power consumption	1 600	mW
Outline dimensions (W x H x D)	197.0 x 142.5 x 9.5	mm
Weight	310	g
Operating temperature	0 to +40	°C
Storage temperature	-25 to +60	°C

Outline Dimensions

unit : mm

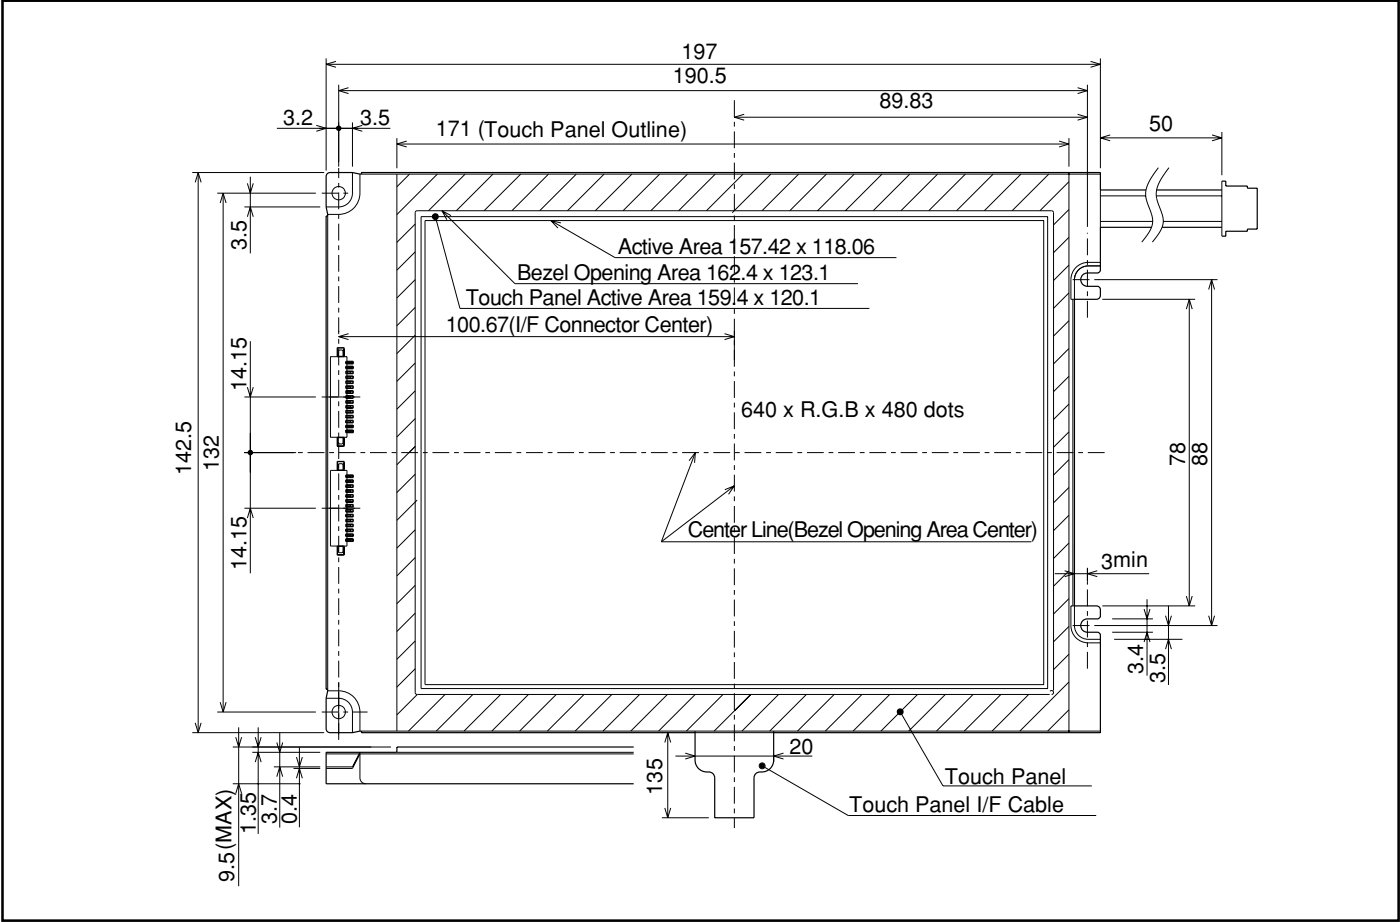

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. Specifications are subject to change without notice for improvement.