


Dot Matrix LED Unit for Outdoor Use LT1465ED(Lamp Type)

■ Features

- No. of dots : 16X16dots
- Outline dimensions : 64X64mm
- Dot size : ø3.0mm
- Dot pitch : 4.0mm
- Radiation color : Yellow-green+Red (dichromatic type)
- Driving method : 1/16 duty dynamic drive



LT1465ED

■ Absolute Maximum Ratings

(Ta=25°C)

| Parameter | Symbol | Rating | Unit |
|------------------------|--------|------------|------|
| Supply voltage for IC | VCC | 5.5 | V |
| Supply voltage for LED | VLED | 5.5 | V |
| Input voltage*1 | VI | 5.5 | V |
| Turn-on time | ton | 1 | ms |
| Operating temperature | Topr | -20 to +45 | °C |
| Storage temperature | Tstg | -25 to +85 | °C |
| Power dissipation | P | 13 | W |

*1 VI<Vcc at Vcc≤5

■ Optical Characteristics

(VCC=5V,VLED=5V,Ta=25°C)

| Parameter | Symbol | TYP. | Unit |
|--------------------------|--------------|------|------|
| Viewing angle | 2θ1/2 | 110 | ° |
| Peak emission wavelength | Red | 635 | nm |
| | Yellow-green | 565 | |

■ Luminance

Luminance is classified into 2 ranks shown below. It is adjustable by variable registers. (VCC=5V,VLED=5V,Ta=25°C)

| Radiation color | Rank | | Unit |
|-----------------|------|-----|-------|
| | 1 | 2 | |
| Red | 160 | 200 | cd/m² |
| Yellow-green | 160 | 200 | |

■ Terminal Functions

| Connector | Symbol | Function |
|---------------------|----------|--|
| Power supply (CN1) | VLED | Supply voltage for LED (+5V) |
| | VCC | Supply voltage for IC (+5V) |
| | GND1 | Ground for IC |
| | GND2 | Ground for LED |
| Input signal (CN2) | A0 to A3 | Address specification signal for row driver |
| | RDATA | Serial data input for red (H=ON, L=OFF) Shift from right to left(VD15→VD0) in the unit |
| | GDATA | Serial data input for yellow-green (H=ON, L=OFF) Shift from right to left(VD15→VD0) in the unit |
| | LATCH | Latch signal of display data.L→H: Contents of shift register are latched. |
| | ENABLE | Controls ON/OFF of LED (H: LED OFF) |
| | CLOCK | Clock signal for data transmission in the shift-register. (L→H: Serial data is shifted.) |
| | GND1 | Ground for signal. (Connected to ground for IC) |
| Output signal (CN3) | A0 to A3 | Buffered input signal |
| | RDATA | Input signal generated through 16-bit shift register or buffer |
| | GDATA | Input signal generated through 16-bit shift register or buffer |
| | LATCH | Buffered input signal |
| | ENABLE | Buffered input signal |
| | CLOCK | Buffered input signal |
| | GND1 | Ground for signal. (Connected to ground for IC) |

Each signal is used as input signal for next unit.

* As for the terminal number, refer to the outline dimensions.


■ Electrical Characteristics

(VCC=5V,VLED=5V,Ta=25°C)


| Parameter | Symbol | MIN. | TYP. | MAX. | Unit |
|---------------------------|--------|------|------|------|------|
| Supply voltage for IC | VCC | 4.75 | 5.0 | 5.25 | V |
| Supply voltage for LED | VLED | 4.75 | 5.0 | 5.25 | V |
| IC current dissipation*1 | ICC | — | 20 | 40 | mA |
| LED current dissipation*1 | ILED | — | 1.7 | 2.0 | A |
| Input voltage | VIH | 3.5 | — | — | V |
| | VIL | — | — | 1.5 | V |
| Input current | IiH | — | — | 0.1 | μA |
| | IiL | — | — | 0.12 | mA |
| Clock frequency | fCLK | — | — | 3.0 | MHz |
| Frame frequency | fFR | 80 | 100 | — | Hz |

*1 Under the condition that dichromatic all dots are lit.


■ Timing Chart

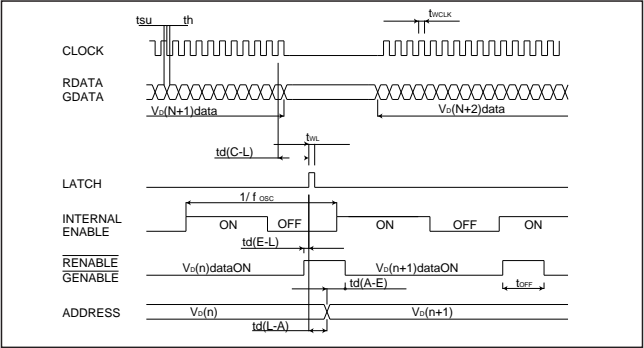

■ Block Diagram

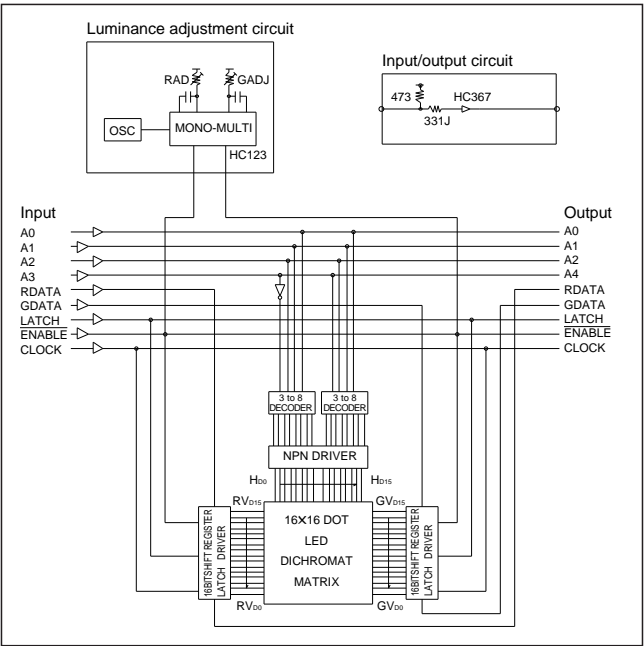


(Notice) ● In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.
(Internet) ● Data for sharp's optoelectronic/power device is provided for internet.(Address <http://www.sharp.co.jp/ecg/>)

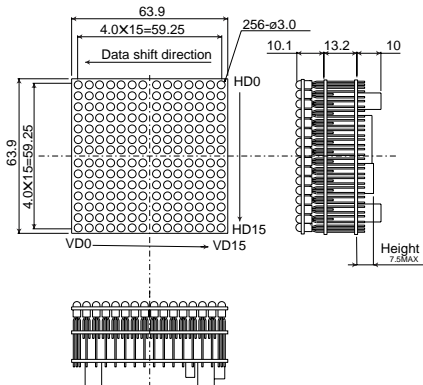

Hexagonal supporter

4-M3
Depth5MIN



Pin connection

CN1(Power supply)

| NO | Name |
|----|------|
| 1 | VLED |
| 2 | VDD |
| 3 | GND1 |
| 4 | GND2 |

CN2(Input signal) CN3(Output signal)

| NO | Name | NO | Name |
|----|--------|----|--------|
| 1 | A0 | 1 | A0 |
| 2 | A1 | 2 | A1 |
| 3 | A2 | 3 | A2 |
| 4 | A3 | 4 | A3 |
| 5 | RDATA | 5 | RDATA |
| 6 | GDATA | 6 | GDATA |
| 7 | LATCH | 7 | LATCH |
| 8 | ENABLE | 8 | ENABLE |
| 9 | CLOCK | 9 | CLOCK |
| 10 | GND1 | 10 | GND1 |