

VX-2 Series Power MOSFET

N-Channel Enhancement type

2SK2198 (F30Z50VX2)

500V 30A

FEATURES

- Input capacitance (C_{iss}) is small. Especially, input capacitance at 0 bias is small.
- The static $R_{ds(on)}$ is small.
- The switching time is fast.

APPLICATION

- Switching power supply of AC 100V input
- High voltage power supply
- Inverter

RATINGS


- Absolute Maximum Ratings (Tc = 25°C)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-55~150	℃
Channel Temperature	T _{ch}		150	
Drain-Source Voltage	V _{DSS}		500	V
Gate-Source Voltage	V _{GSS}		±30	
Continuous Drain Current (DC)	I _D		30	A
Continuous Drain Current (Peak)	I _{DP}		90	
Continuous Source Current (DC)	I _S		30	
Total Power Dissipation	P _T		220	W
Single Pulse Avalanche Current	I _{AS}	T _{ch} = 25℃	30	A
Mounting Torque	TOR	(Recommended torque : 0.5N・m)	0.8	N・m

OUTLINE DIMENSIONS

Case : MTO-3L

(Unit : mm)

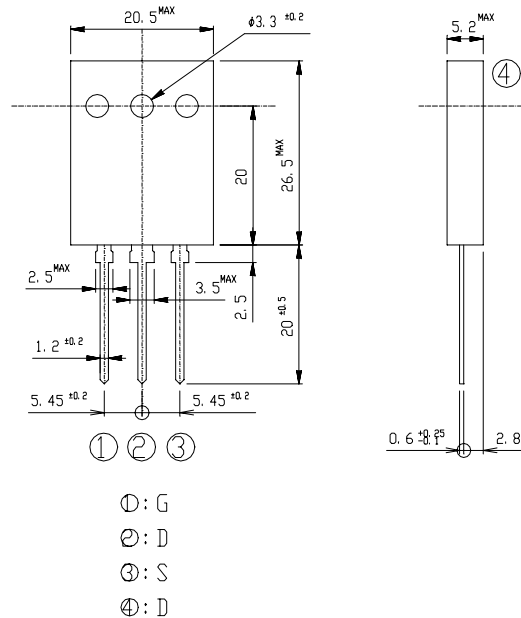


●Electrical Characteristics T_c = 25°C


Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage	V(BR)DSS	I _D = 1mA, V _{GS} = 0V	500			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 500V, V _{GS} = 0V			250	μ A
Gate-Source Leakage Current	I _{GSS}	V _{GS} = ±30V, V _{DS} = 0V			±0.1	
Forward Transconductance	g _{fs}	I _D = 15A, V _{DS} = 10V	9	20		S
Static Drain-Source On-state Resistance	R _{DS(ON)}	I _D = 15A, V _{GS} = 10V		0.16	0.23	Ω
Gate Threshold Voltage	V _{TH}	I _D = 3mA, V _{DS} = 10V	2.5	3.0	3.5	V
Source-Drain Diode Forwade Voltage	V _{SD}	I _S = 15A, V _{GS} = 0V			1.5	
Thermal Resistance	θ _{jc}	junction to case			0.568	°C/W
Total Gate Charge	Q _g	V _{DD} = 400V, V _{GS} = 10V, I _D = 30A		125		nC
Input Capacitance	C _{iss}	V _{DS} = 10V, V _{GS} = 0V, f = 1MHz		3700		pF
Reverse Transfer Capacitance	C _{rss}			230		
Output Capacitance	C _{oss}			770		
Turn-On Time	t _{on}	I _D = 15A, V _{GS} = 10V, R _L = 10Ω		200	375	ns
Turn-Off Time	t _{off}			500	900	

2SK2198


Transfer Characteristics

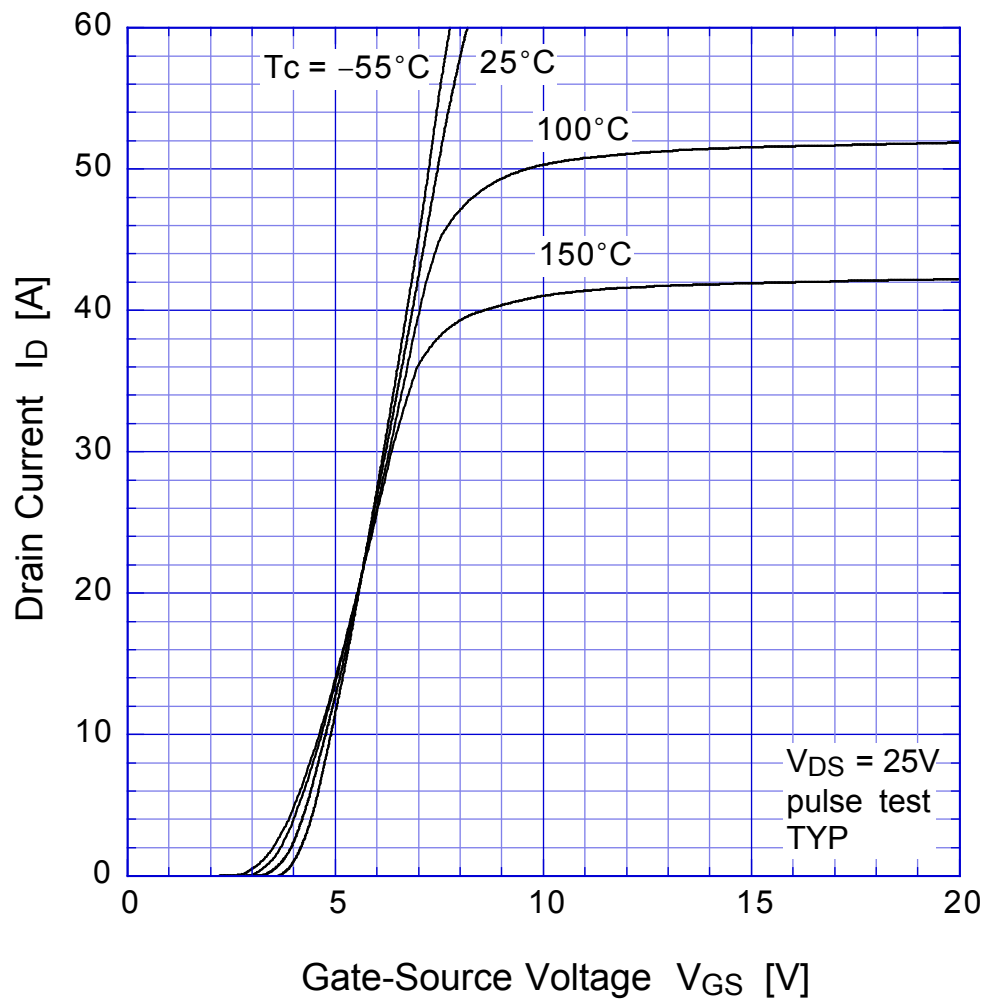

2SK2198 Static Drain-Source On-state Resistance

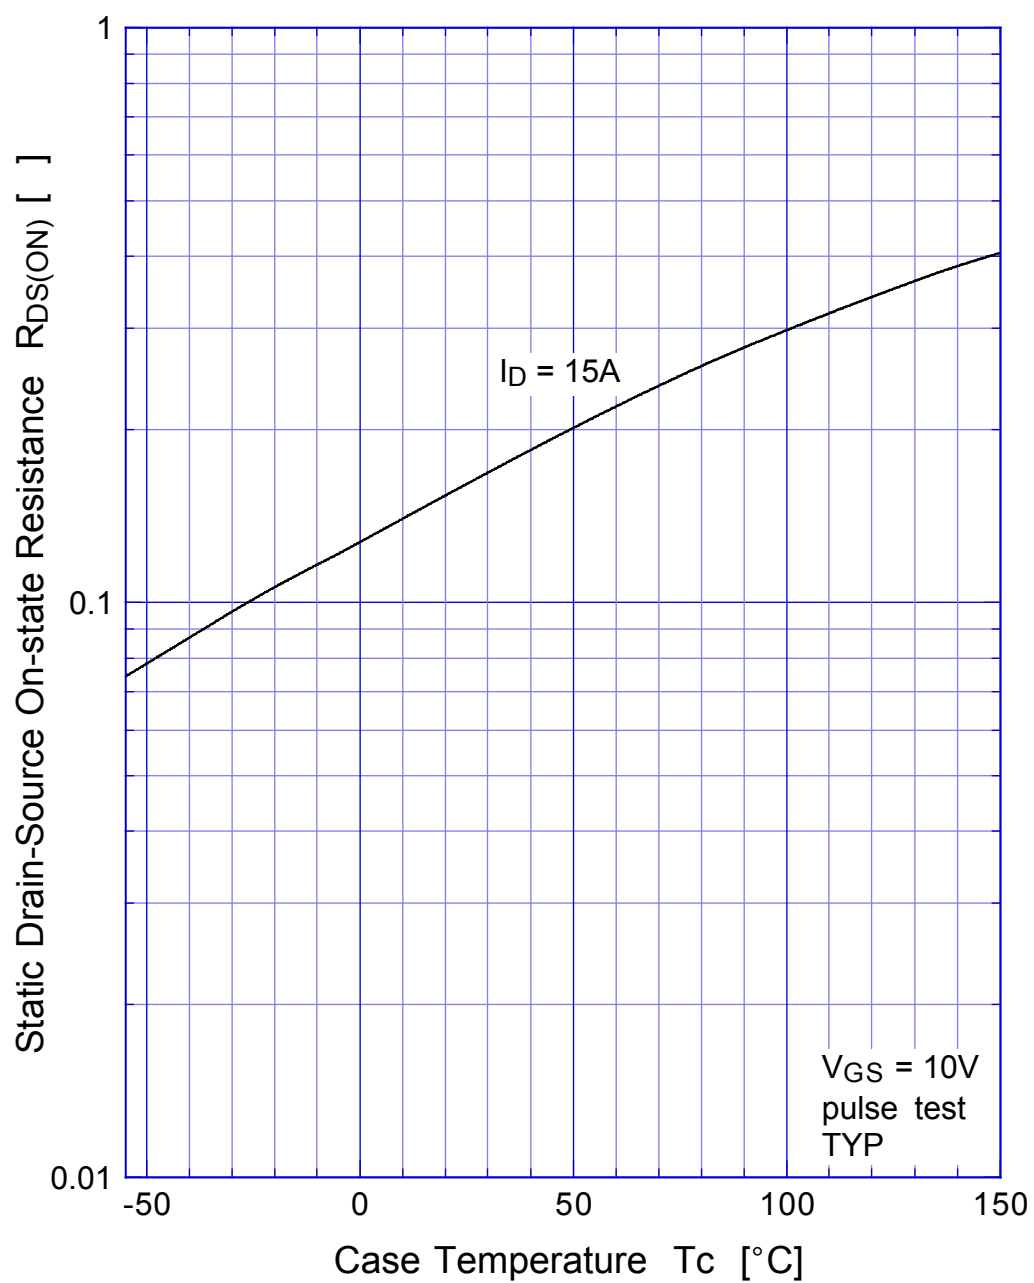


2SK2198 Gate Threshold Voltage

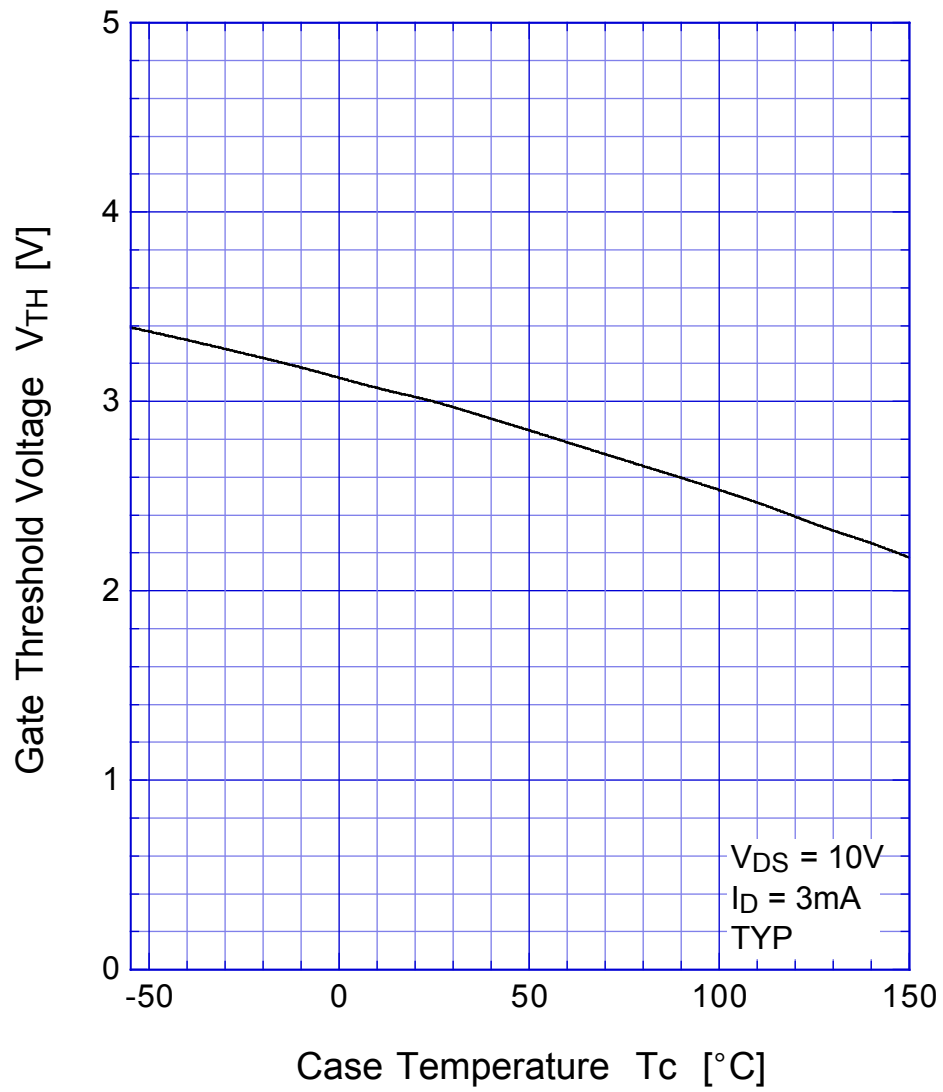


2SK2198


Safe Operating Area

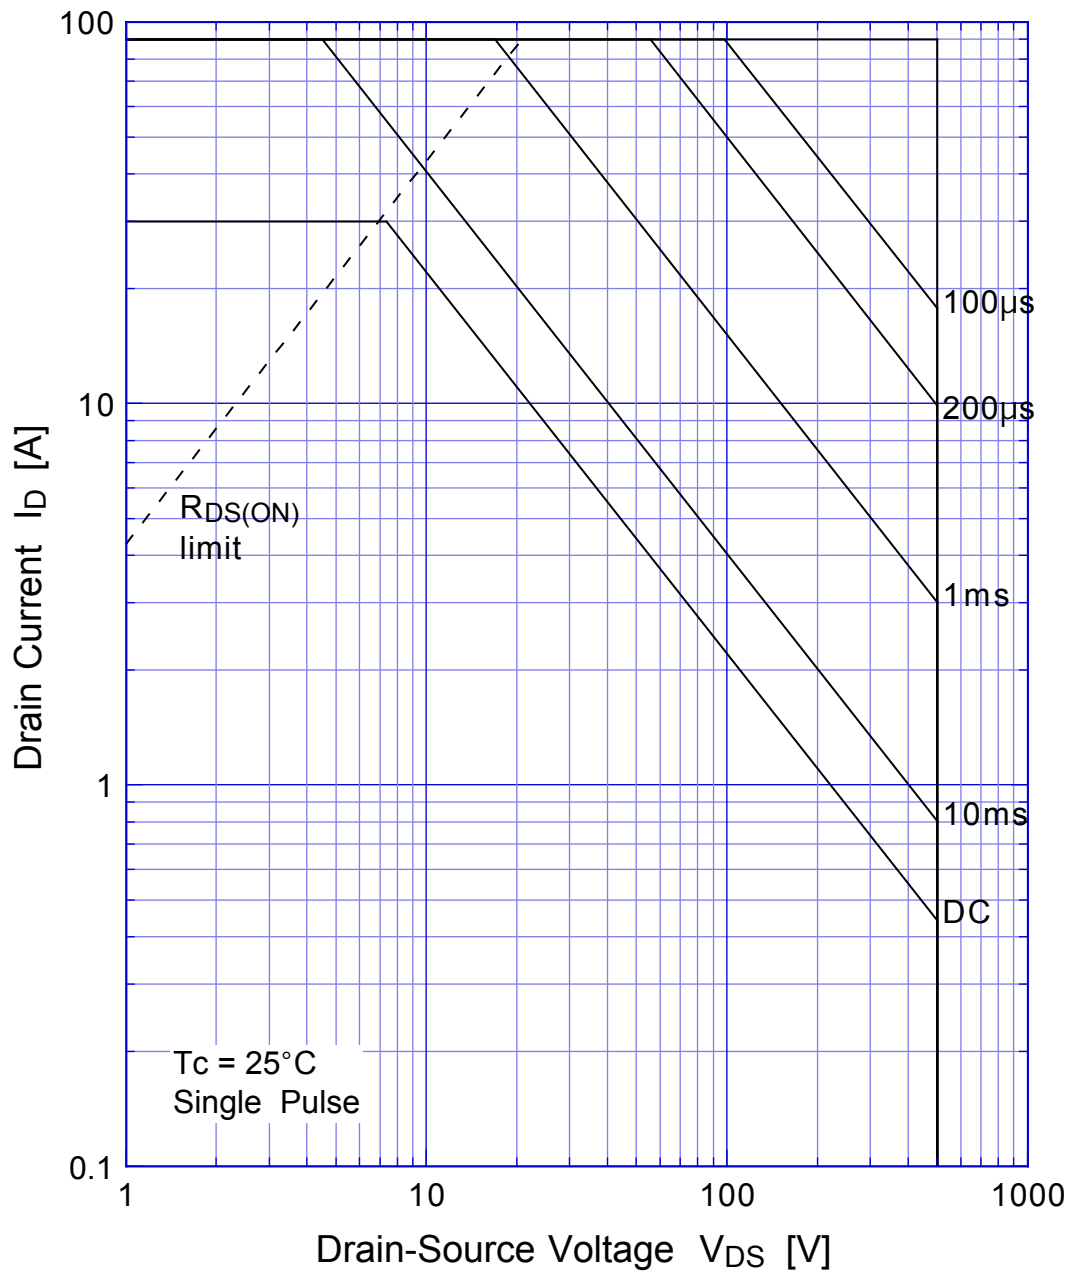

2SK2198 Transient Thermal Impedance

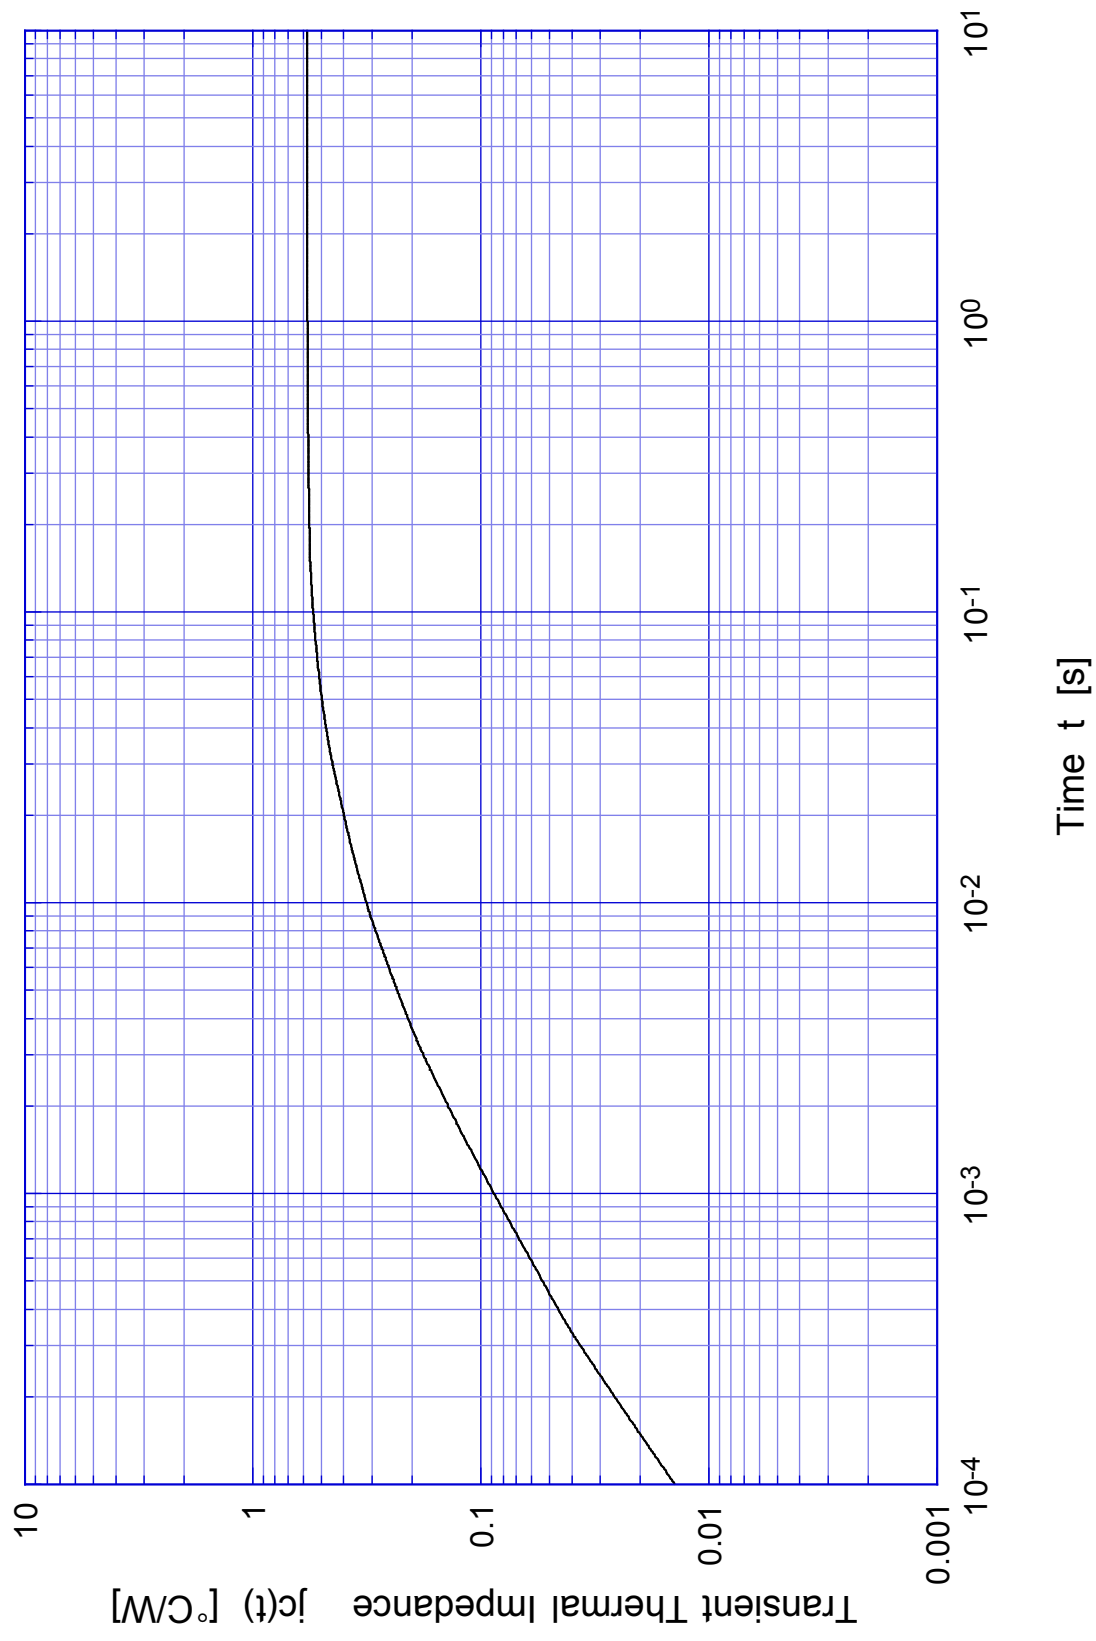


2SK2198 Capacitance

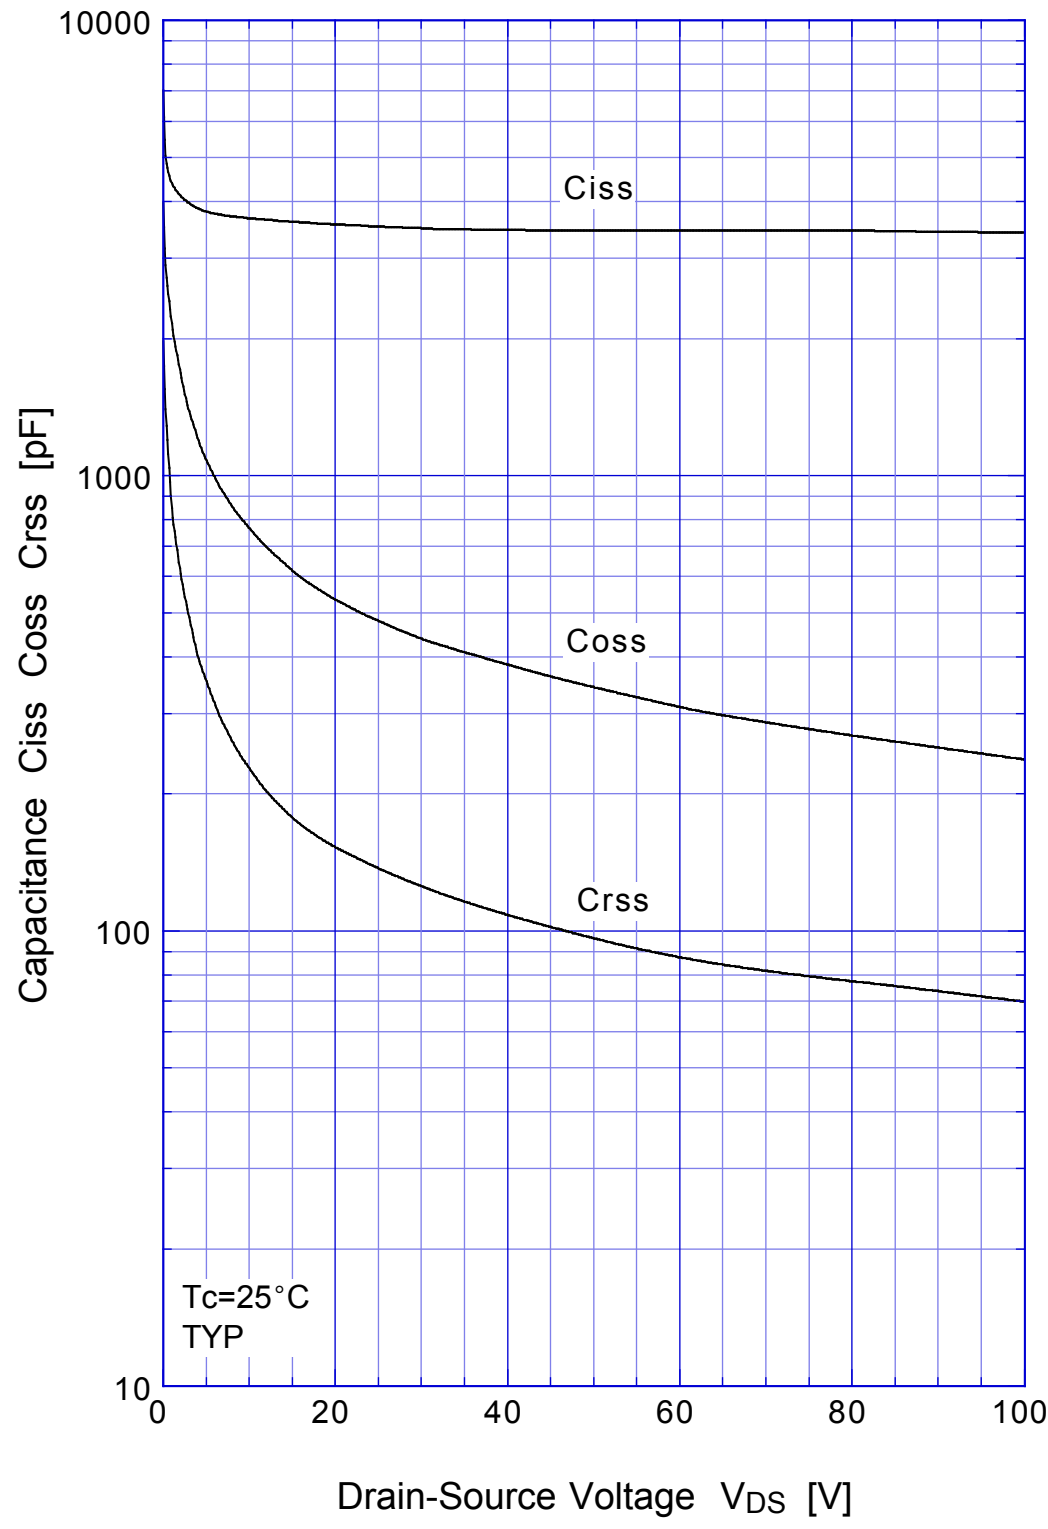

2SK2198

Power Derating

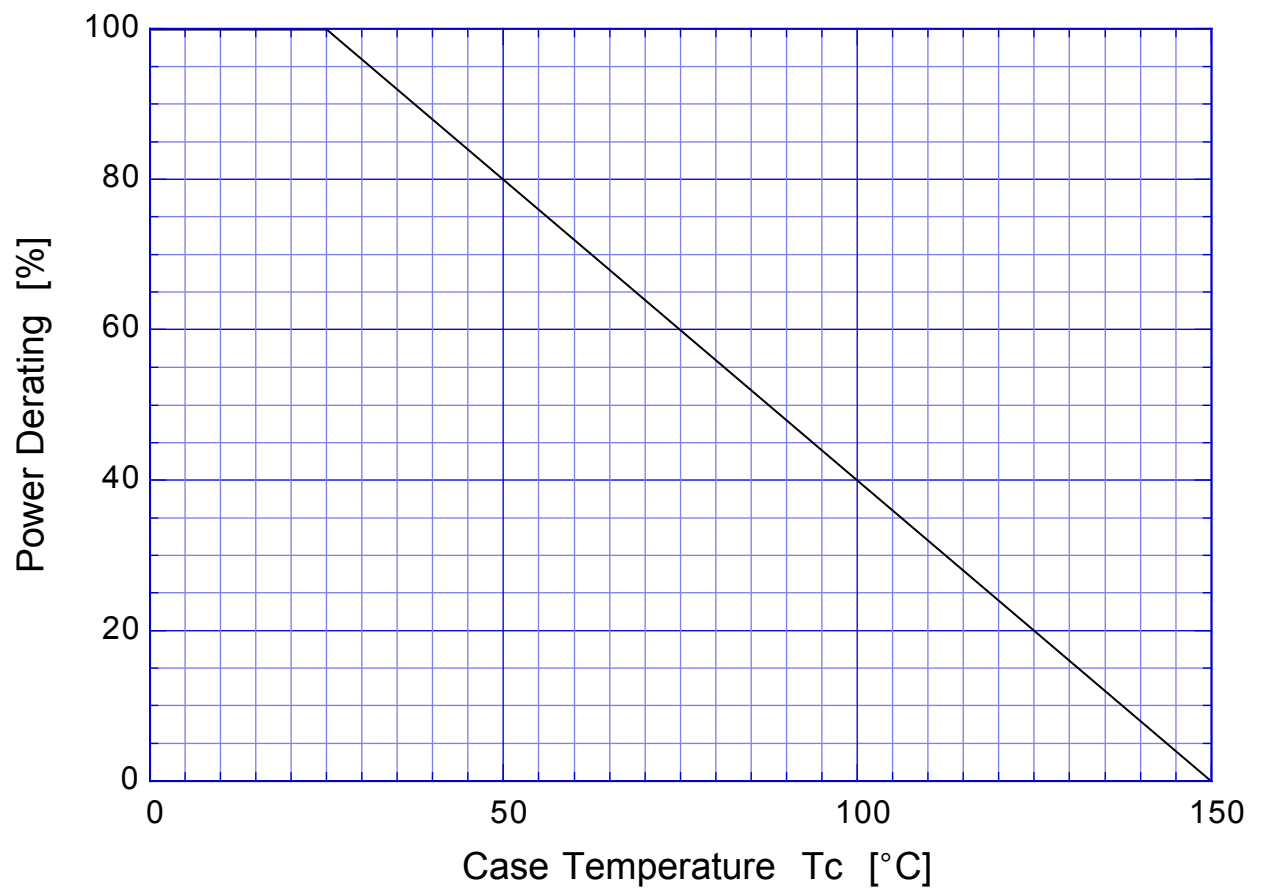

2SK2198

Gate Charge Characteristics

