


CME3.3V15A/5V5A

Output voltage (V)	3.3	5
Input voltage (V)	-48	
Input voltage range (V)	-36~-60	
Conduction noise (dBm)	-53	
Output voltage range	+5% -5%	+5% -5%
Output Current (A)	15	5
Output current range (A)	0~15	0~5
Over current protection (A)	22.5	7.5
Over voltage protection (V)	4.2	6
Output ripple noise (mVp-p)	100	
Efficiency	89.5%	
Operating temperature	Ta = 0~70°C	
Mechanical dimension (mm)	70.5×70.5×8.5	
Isolated voltage (V)	AC 500, DC 707 (applied for 1minute)	
Parallel operation	○	
Cooling method	Forced air cooling (1.5m/sec)	
Low voltage protection (V)	2.5	4.5

■ Outline diagram

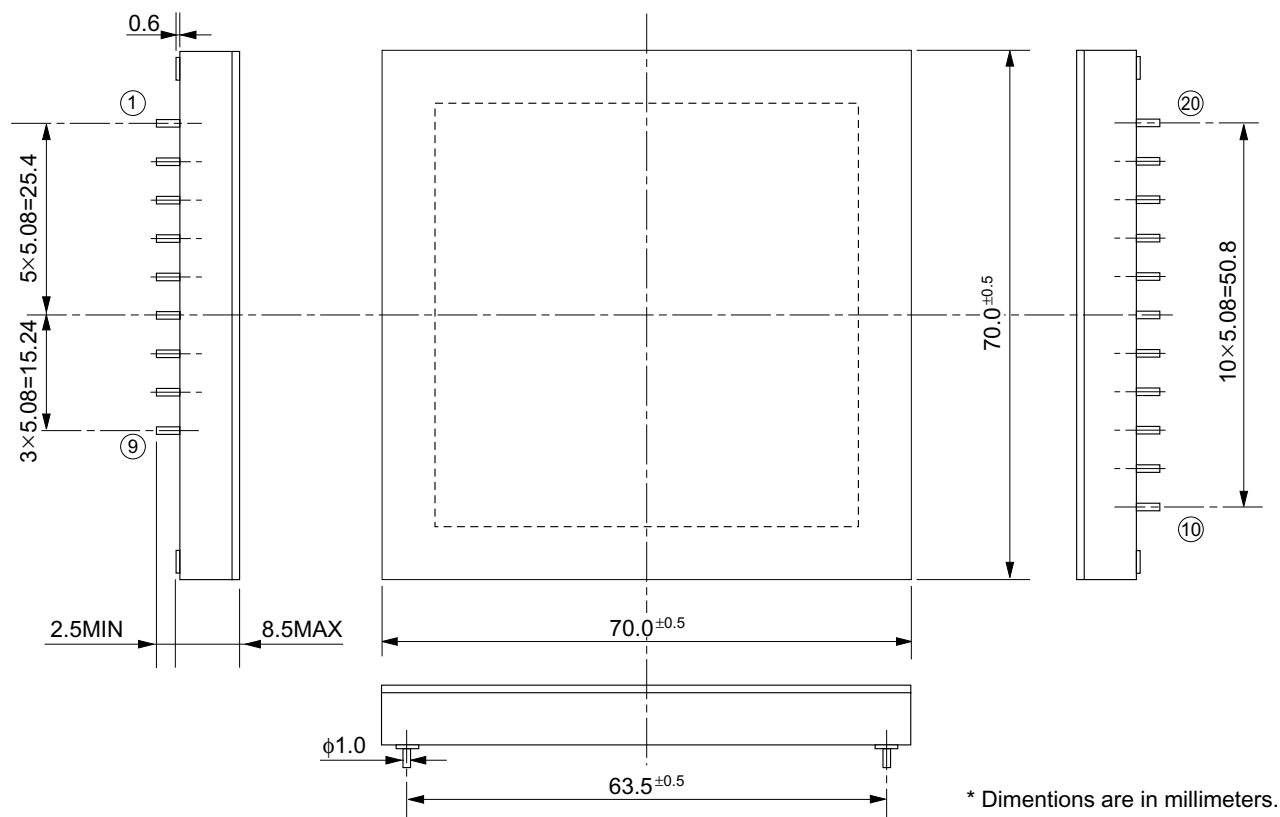

■ Pin arrangement

Pin No.	Symbol		Function
1	LO		Local off control signal pin
2	RO		Remote off control signal pin
3	R		Reset pin
4	P		Alarm pin
5	Q		SABG pin
6	-IN		Input voltage pin
7	+IN		Input ground pin
8	NC		Not connected*
9	CTL		Live line insertion and removal control signal pin
10	3.3V	+	Output voltage pin
11			
12		-	Output ground pin
13			
14	5V	-	Output ground pin
15			
16		+	Output voltage pin
17			
18			
19	TT1		Not connected*
20	TT2		Not connected*

*NC may be used for testing by the manufacturer and shall not be connected by the customer.