


Seven Segment Display 7 mm (0.28 ")

HD 1075
HD 1077

Features

- Excellent readability by ambient light
- Excellent character appearance
- Evenly lighted segments
- Wide viewing angle $2\varphi = 50^\circ$
- Mitred corners on segments
- Grey package provides optimum contrast
- IC-compatible
- Right hand decimal

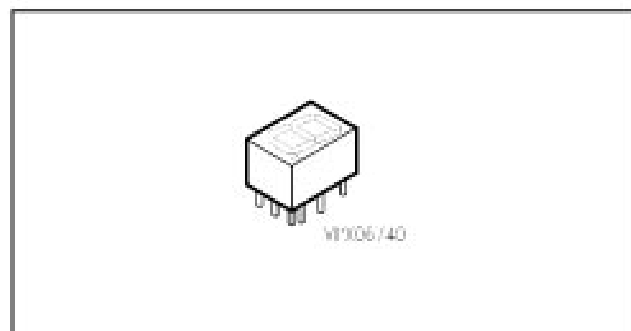

Type	Polarity	Color of emission	Luminous intensity/ Segment $I_F = 10 \text{ mA}$ $I_v (\mu\text{cd})$	Ordering code
HD 1075 R	common anode	red	550 (typ.)	Q68000-A5747
HD 1075 O		super-red	2500 (typ.)	Q68000-A5746
HD 1075 G		green	3000 (typ.)	Q68000-A6346
HD 1077 R	common cathode	red	550 (typ.)	Q68000-A5759
HD 1077 O		super-red	2500 (typ.)	Q68000-A5758
HD 1077 G		green	3000 (typ.)	Q68000-A6348

Maximum Ratings ($T_A = 25\text{ °C}$)

Description	Symbol	Value	Unit
Operating temperature range	T_{op}	0 ... + 85	°C
Storage temperature range	T_{stg}	– 40 ... + 85	°C
Lead soldering temperature, 2 mm from base	T_S	260	°C for 3 s
Peak forward current per segment or DP ¹⁾ $t_P \leq 10\text{ }\mu\text{s}$ HD 107* R HD 107* O, -G	I_{FM} I_{FM}	500 150	mA mA
DC forward current per segment or DP ²⁾ HD 107* R HD 107* O, -G	I_F I_F	25 17	mA mA
Pulse peak forward current per segment	I_{FM}	100	mA
Reverse voltage per segment or DP	V_R	6	V
Total power dissipation $T_A \leq 45\text{ °C}$	P_{tot}	400	mW

1) Do not exceed maximum average current per segment (see graph of the permissible pulse handling capability)

2) Derate maximum average current above $T_A = 75\text{ °C}$ at 0.5 mA/°C per segment


Characteristics ($T_A = 25\text{ °C}$)

Parameter	Symbol	Values			Unit
		min	typ.	ma	
Luminous intensity per segment, $I_F = 10\text{ mA}$					
HD 1075 R, HD 1077 R	I_V	180	550	-	μcd
HD 1075 O, HD 1077 O	I_V	700	250	-	μcd
HD 1075 G, HD 1077 G	I_V	700	0	-	μcd
Peak wavelength, $I_F = 10\text{ mA}$					
HD 1075 R, HD 1077 R	λ_{peak}	-	660	-	nm
HD 1075 O, HD 1077 O	λ_{peak}	-	630	-	nm
HD 1075 G, HD 1077 G	λ_{peak}	-	565	-	nm
Dominant wavelength (Digit average)					
HD 1075 R, HD 1077 R	λ_{dom}	-	645	-	nm
HD 1075 O, HD 1077 O	λ_{dom}	612	-	625	nm
HD 1075 G, HD 1077 G	λ_{dom}	562	-	575	nm
Forward voltage per segment*, $I_F = 20\text{ mA}$					
HD 1075 R, HD 1077 R	V_F	-	1.6	2.0	V
HD 1075 O, HD 1077 O	V_F	-	2.0	3.0	V
HD 1075 G, HD 1077 G	V_F	-	2.4	3.0	V
Break down voltage per segment* $I_R = 10\text{ }\mu\text{A}$	V_{BR}	6	15	-	V
Max. thermal resistance	R_{thJA}	-	-	140	$^{\circ}\text{C/W/Seg}$

*) AQL = 0.4%


Relative spectral emission $I_{rel} = f(\lambda)$

$V(\lambda)$ = Standard eye response curve

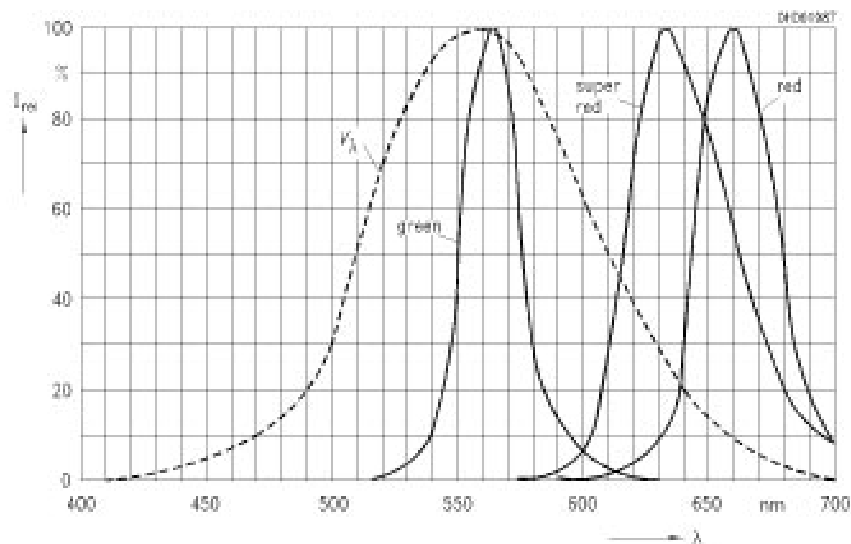


Forward current $I_F = f(V_F)$

$T_A = 25^\circ\text{C}$

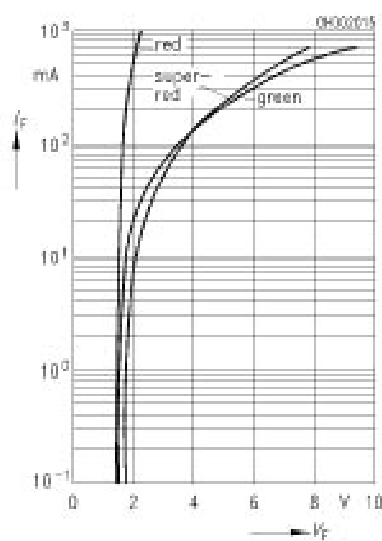

Rel. luminous intensity $I_v/I_v(25^\circ\text{C}) = f(T_A)$


$I_F = 10\text{ mA}$

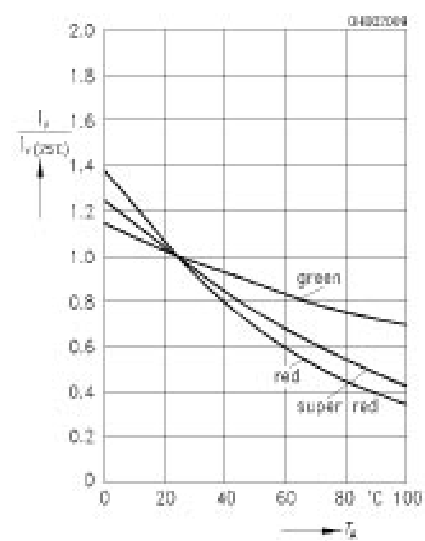

Permissible pulse handling capability

$$I_F = f(t_p), T_A \leq 45^\circ\text{C}$$


red

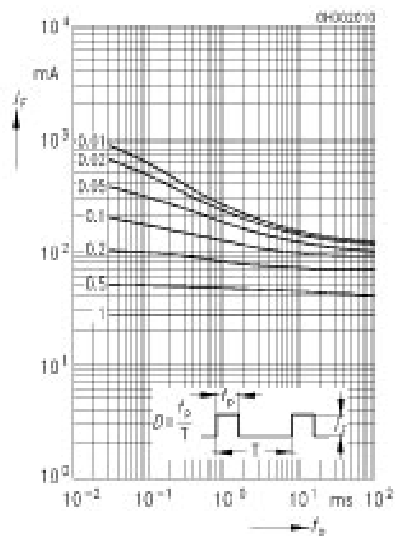

Permissible pulse handling capability


$$I_F = f(t_p), T_A \leq 45^\circ\text{C}$$

super-red, green

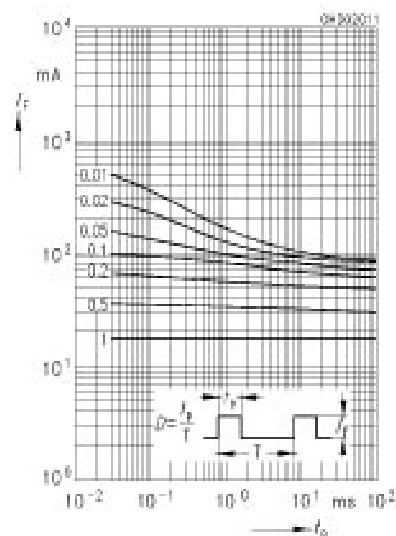


Max. permissible forward current

$$I_F = f(T_A)$$

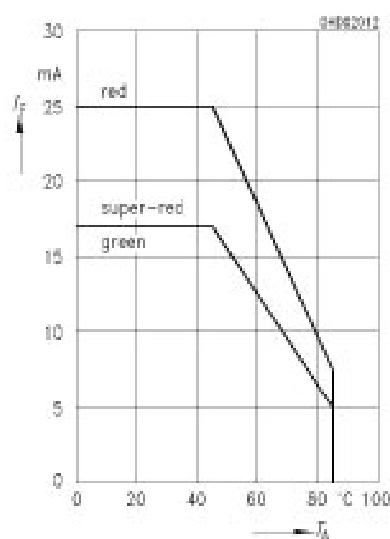

Rel. luminous intensity $I_v/I_v(10\text{ mA}) = f(I_F)$

$$T_A = 25^\circ\text{C}$$

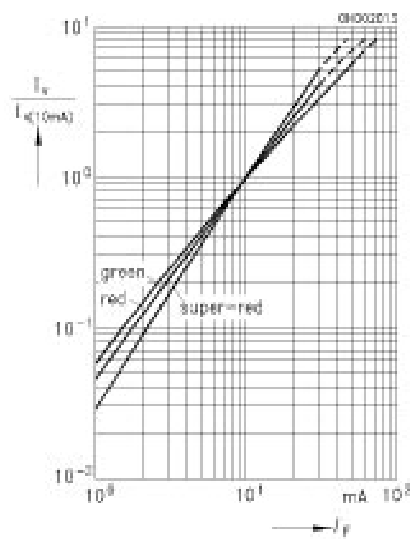

Total power dissipation $P_{\text{tot}} = f(T_A)$



Package Outlines

