


## Dual, 12-Bit, Voltage Output D/A Converter

- Low Cost
- Two 12-bit DAC's on a Single Chip
- Low Power — 40 mW (20mW/DAC)
- Double-Buffered Inputs
- $\pm 5V$  Supply Operation
- Voltage Outputs,  $\pm 4.5V$  Range
- Midscale Preset, Zero Volts Out
- Guaranteed  $\pm 0.5$  LSB Max INL
- Guaranteed  $\pm 0.75$  LSB Max DNL
- 2 MHz 4-Quadrant Multiplying Bandwidth
- Separate Reference Inputs
- 28-pin SOIC and Plastic DIP Packages
- Either 12 or 8 bit  $\mu$ p bus



### DESCRIPTION

The **SP9502** is a low power, dual version of the popular SP9345, Quad 12-Bit Digital-to-Analog Converter. It features  $\pm 4.5V$  output swings when using  $\pm 5$  volt supplies. The converter is double-buffered for easy microprocessor interface. Each 12-bit DAC is independently addressable and both DACS may be simultaneously updated using a single transfer command. The output settling-time is specified at  $4\mu s$ . The **SP9502** is available in 28-pin SOIC and DIP packages, specified over commercial temperature range.

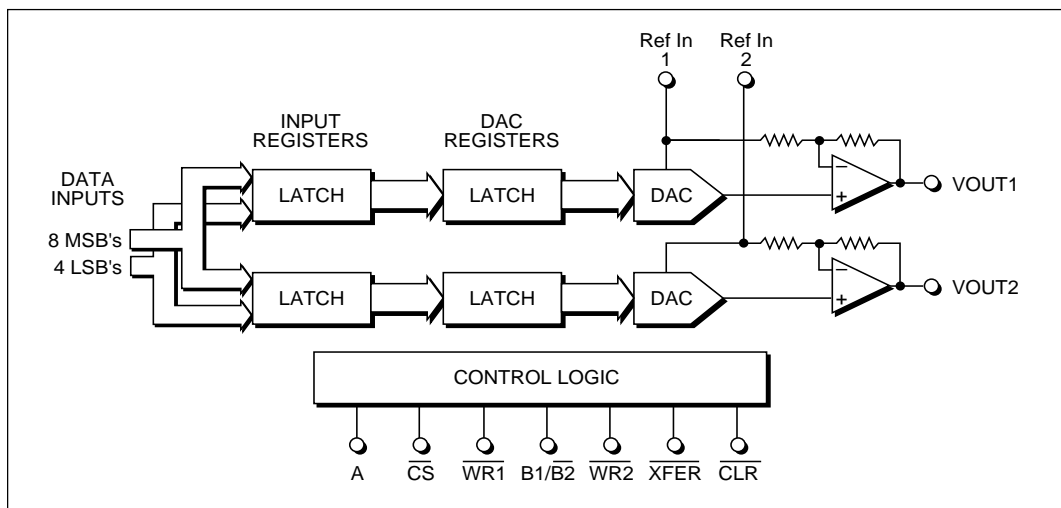

## ABSOLUTE MAXIMUM RATINGS

These are stress ratings only and functional operation of the device at these or any other above those indicated in the operation sections of the specifications below is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

$V_{DD} - GND$ .....	-0.3V, +6.0V
$V_{SS} - GND$ .....	+0.3V, -6.0V
$V_{DD} - V_{SS}$ .....	-0.3V, +12.0V
$V_{REF}$ .....	$V_{SS}^1$ $V_{DD}$
$D_{IN}$ .....	$V_{SS}^1$ $V_{DD}$
Power Dissipation	
Plastic DIP .....	375mW
(derate 7mW/°C above +70°C)	
Small Outline .....	375mW
(derate 7mW/°C above +70°C)	



**CAUTION:**  
ESD (ElectroStatic Discharge) sensitive device. Permanent damage may occur on unconnected devices subject to high energy electrostatic fields. Unused devices must be stored in conductive foam or shunts. Personnel should be properly grounded prior to handling this device. The protective foam should be discharged to the destination socket before devices are removed.

## SPECIFICATIONS

(Typical at 25°C,  $T_{MIN} \leq T_A \leq T_{MAX}$ ;  $V_{DD} = +5V$ ,  $V_{SS} = -5V$ ,  $V_{REF} = +3V$ ; CMOS logic level digital inputs; specifications apply to all grades unless otherwise noted.)

PARAMETER	MIN.	TYP.	MAX.	UNITS	CONDITIONS
<b>DIGITAL INPUTS</b>					
Logic Levels					
$V_{IH}$	2.4		0.8	Volts	
$V_{IL}$				Volts	
4 Quad, Bipolar Coding		Offset Binary			
<b>REFERENCE INPUT</b>					
Voltage Range	6	$\pm 3$	$\pm 4.5$	Volts	Note 5
Input Resistance		8.8		k $\Omega$	$D_{IN} = 1877$ , code dependent
<b>ANALOG OUTPUT</b>					
Gain					
-K		$\pm 0.5$	$\pm 2.0$	LSB	$V_{REF} = \pm 3V$ ; Note 3
-J		$\pm 1.0$	$\pm 4.0$	LSB	$V_{REF} = \pm 3V$ ; Note 3
		$\pm 1.0$	$\pm 5.0$	LSB	$V_{REF} = \pm 4.5V$ ; Note 3
Initial Offset Bipolar		$\pm 0.25$	$\pm 3.0$	LSB	$D_{IN} = 2,048$
Voltage Range Bipolar		$\pm 3.0$	$\pm 4.5$	Volts	
Output Current	$\pm 5.0$			mA	$V_{REF} = \pm 3V$
	$\pm 0.5$			mA	$V_{REF} = \pm 4.5V$
<b>STATIC PERFORMANCE</b>					
Resolution	12			Bits	
Integral Linearity					
-K		$\pm 0.25$	$\pm 0.5$	LSB	$V_{REF} = \pm 3V$ ; Note 3
-J		$\pm 0.5$	$\pm 1.0$	LSB	$V_{REF} = \pm 3V$ ; Note 3
		$\pm 0.5$	$\pm 3.0$	LSB	$V_{REF} = \pm 4.5V$ ; Note 3
Differential Linearity					
-K		$\pm 0.25$	$\pm 0.75$	LSB	
-J		$\pm 0.25$	$\pm 1.0$	LSB	
Monotonicity		Guaranteed			
<b>DYNAMIC PERFORMANCE</b>					
Settling Time					
Small Signal		0.5		$\mu s$	to 0.012%
Full Scale		4		$\mu s$	to 0.012%
Slew Rate		4		V/ $\mu s$	
Multiplying Bandwidth		2		MHz	


## SPECIFICATIONS (continued)

(Typical at 25°C,  $T_{MIN} \leq T_A \leq T_{MAX}$ ;  $V_{DD} = +5V$ ,  $V_{SS} = -5V$ ,  $V_{REF} = +3V$ ; CMOS logic level digital inputs; specifications apply to all grades unless otherwise noted.)

PARAMETER	MIN.	TYP.	MAX.	UNITS	CONDITIONS
<b>STABILITY</b>					
Gain		15		ppm/°C	$t_{MIN}$ to $t_{MAX}$
Bipolar Zero		15		ppm/°C	$t_{MIN}$ to $t_{MAX}$
<b>SWITCHING CHARACTERISTICS</b>					
$t_{DS}$ Data Set Up Time	140	100		ns	to rising edge of WR1, Figure 4
$t_{DN}$ Data Hold Time	0			ns	
$t_{WR}$ Write Pulse Width	140	100		ns	
$t_{XFER}$ Transfer Pulse Width	140	100		ns	
$t_{WC}$ Total Write Command	280	200		ns	
<b>POWER REQUIREMENTS</b>					
$V_{DD}$ -J, -K		4	6	mA	Note 5 +5V, $\pm 3\%$ ; Note 4, 5
$V_{SS}$ -J, -K		4	6	mA	-5V, $\pm 3\%$ ; Note 4, 5
Power Dissipation		40		mW	
<b>ENVIRONMENTAL AND MECHANICAL</b>					
Operating Temperature					
-J, -K	0		+70	°C	
Storage	-60		+150	°C	
Package					
_N		28-pin Plastic DIP			
_S		28-pin SOIC			

### Notes:

- Integral Linearity, for the **SP9502**, is measured as the arithmetic mean value of the magnitudes of the greatest positive deviation and the greatest negative deviation from the theoretical value for any given input condition.
- Differential Linearity is the deviation of an output step from the theoretical value of 1 LSB for any two adjacent digital input codes.
- 1 LSB =  $2 \cdot V_{REF} / 4,096$ .
- $V_{REF} = 0V$ .
- The following power up sequence is recommended to avoid latch up:  $V_{SS}$  (-5V),  $V_{DD}$  (+5V),  $REFIN$ .

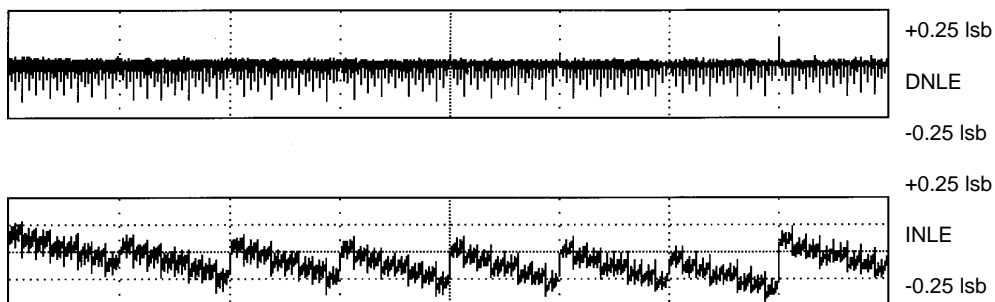


INLE, DNLE Plots

CODE

4095

## PINOUT — 28-PIN SOIC & DIP

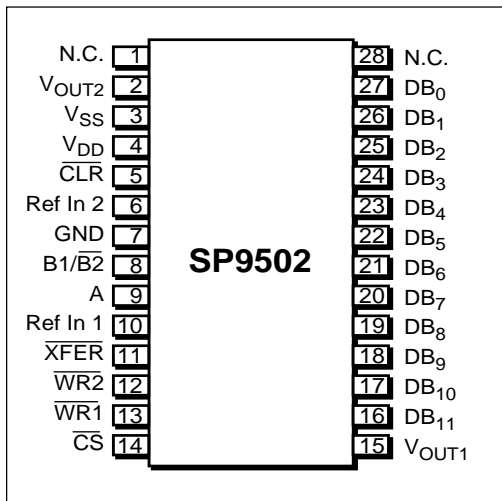

### PIN ASSIGNMENTS

Pin 1 — N.C. — No Connection.

Pin 2 — V<sub>OUT2</sub> — Voltage Output from DAC2.

Pin 3 — V<sub>SS</sub> — -5V Power Supply Input.

Pin 4 — V<sub>DD</sub> — +5V Power Supply Input.

Pin 5 — CLR — Clear. Gated with WR2 (pin 12). Active low. Clears both DAC outputs to 0V.

Pin 6 — REF IN2 — Reference Input for DAC2.

Pin 7 — GND — Ground.

Pin 8 — B1/B2 — Byte 1/Byte 2 — Selects Data Input Format. A logic “1” on pin 8 selects the 12-bit mode, and all 12 data bits are presented to the DAC(s) unchanged; a logic “0” selects the 8-bit mode, and the four LSBs are connected to the four MSBs, allowing an 8-bit MSB-justified interface.

Pin 9 — A — Address for DAC Selection — A logic “0” selects DAC 1; a logic “1” selects DAC 2.

Pin 10 — REF IN1 — Reference Input for DAC1.

Pin 11 — XFER — Transfer. Gated with WR2 (pin 12); loads all DAC registers simultaneously. Active low.

Pin 12 — WR2 — Write Input 2 — In conjunction with XFER (pin 11), controls the transfer of data from the input registers to the DAC registers. In conjunction with CLR (pin 5), the DAC registers

are forced to 1000 0000 0000 and the DAC outputs will settle to OV. Active low.

Pin 13 — WR1 — Write Input 1 — In conjunction with CS (pin 14), enables input register selection, and controls the transfer of data from the input bus to the input registers. Active low.

Pin 14 — CS — Chip Select — Enables writing data to input registers and/or transferring data from input bus to DAC registers.

Pin 15 — V<sub>OUT1</sub> — Voltage Output from DAC1.

Pin 16 — DB<sub>11</sub> — Data Bit 11; most significant bit.

Pin 17 — DB<sub>10</sub> — Data Bit 10.

Pin 18 — DB<sub>9</sub> — Data Bit 9.

Pin 19 — DB<sub>8</sub> — Data Bit 8.

Pin 20 — DB<sub>7</sub> — Data Bit 7.

Pin 21 — DB<sub>6</sub> — Data Bit 6.

Pin 22 — DB<sub>5</sub> — Data Bit 5.

Pin 23 — DB<sub>4</sub> — Data Bit 4.

Pin 24 — DB<sub>3</sub> — Data Bit 3.

Pin 25 — DB<sub>2</sub> — Data Bit 2.

Pin 26 — DB<sub>1</sub> — Data Bit 1.

Pin 27 — DB<sub>0</sub> — Data Bit 0; LSB

Pin 28 — N.C. — No Connection.

## FEATURES

The **SP9502** is a low power, dual version of the popular SP9345, Quad 12-Bit Digital-to-Analog Converter. This Dual, Voltage Output, 12-Bit Digital-to-Analog Converter features  $\pm 4.5V$  output swings when using  $\pm 5$  volt supplies. The input coding format used is standard offset binary. (Refer to *Table 1* below.)

The converter utilizes double-buffering on each of the 12 parallel digital inputs, for easy microprocessor interface. Each 12-bit DAC is independently addressable and both DACS may be simultaneously updated using a single **XFER** command. The output settling-time is specified at  $4\mu s$  to full 12-bit accuracy when driving a  $5K\Omega$ ,  $50pF$  load combination. The **SP9502**, Dual 12-Bit Digital-to-Analog Converter is ideally suited for applications such as ATE, process controllers, robotics, and instrumentation. The **SP9502** is available in 28-pin plastic SOIC and plastic DIP packages, specified over the commercial ( $0^{\circ}C$  to  $+70^{\circ}C$ ) temperature range.

## THEORY OF OPERATION

The **SP9502** consists of five main functional blocks — input data multiplexer, data registers, control logic, 12-bit D/A converters, and two bipolar output voltage amplifiers. The input data multiplexer is designed to interface to either 12- or 8-bit microprocessor data busses. The input data format is controlled by the **B1/B2** signal — a logic “1” selects the 12-bit mode, while a logic “0” selects the 8-bit mode. In the 12-bit mode the data is transferred to the input registers without changes in its format. In the 8-bit mode, the four least significant bits (LSBs) are connected to the four

most significant bits (MSBs), allowing an 8-bit MSB-justified interface. All data inputs are enabled using the  $\overline{CS}$  signal in both modes. The digital inputs are designed to be both TTL and 5V CMOS compatible.

In order to reduce the DAC full scale output sensitivity to the large weighting of the MSB's found in conventional R-2R resistor ladders, the 3 MSB's are decoded into 8 equally weighted levels. This reduces the contribution of each bit by a factor of 4, thus, reducing the output sensitivity to mismatches in resistors and switches by the same amount. Linearity errors and stability are both improved for the same reasons. Each D/A converter is separated from the data bus by two registers, each consisting of level-triggered latches, *Figure 1*. The first register (input register) is 12-bits wide. The input register is selected by the address input  $A_0$  and  $A_1$  and is enabled by the  $\overline{CS}$  and **WR1** signals. In the 8-bit mode, the enable signal to the 8 MSB's is disabled by a logic low on **B1/B2** to allow the 4 LSB's to be updated. The second register (DAC register), accepts the decoded 3 MSB's plus the 9 LSB's. The two DAC registers are updated simultaneously for both DAC's using the **XFER** and **WR2** signals. Using the **CLR** and **WR2** signals or the power-on-reset, (enabled when the power is switched on) the DAC registers are set to 1000 0000 0000 and the DAC outputs will settle to 0V.

Using the control logic inputs, the user has full control of address decoding, chip enable, data transfer and clearing of the DAC's. The control logic inputs are level triggered, and like the data inputs, are TTL and CMOS compatible. The truth table (*Table 2*) shows the appropriate functions associated with the states of the control logic inputs.

The DACs themselves are implemented with a precision thin-film resistor network and CMOS transmission gate switches. Each D/A converter is used to convert the 12-bit input from its DAC register to a precision voltage.

The bipolar voltage output of the **SP9502** is created on-chip from the DAC Voltage Output ( $V_{DAC}$ ) by using an operational amplifier and two feedback resistors connected as shown in *Figure 2*. This configuration produces a  $\pm 4.5V$  bipolar output range with standard offset binary coding. (See *Table 1*)

INPUT			OUTPUT
MSB	LSB		
1111	1111	1111	$V_{REF} - 1 \text{ LSB}$
1111	1111	1110	$V_{REF} - 2 \text{ LSB}$
1000	0000	0001	$0 + 1 \text{ LSB}$
1000	0000	0000	0
0000	0000	0001	$-V_{REF} + 1 \text{ LSB}$
0000	0000	0000	$-V_{REF}$
$1 \text{ LSB} = \frac{2V_{REF}}{2^{12}}$			

*Table 1. Offset Binary Coding*

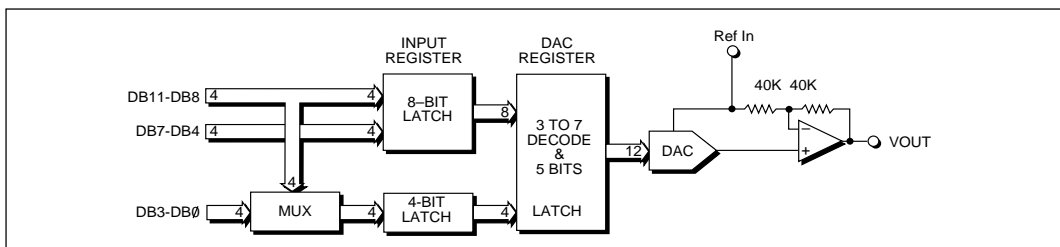


Figure 1. Detailed Block Diagram (only one DAC shown)

## USING THE SP9502 WITH DOUBLE-BUFFERED INPUTS

### Loading Data

To load a 12-bit word to the input register of each DAC, using a 12-bit data bus, the sequence is as follows:

- 1) Set  $\overline{XFER}=1$ ,  $B1/\overline{B2}=1$ ,  $\overline{CLR}=1$ ,  $\overline{WR1}=1$ ,  $\overline{WR2}=1$ ,  $\overline{CS}=1$ .
- 2) Set A (the DAC address) to the desired DAC — 0 = DAC<sub>0</sub>; 1 = DAC<sub>1</sub>.
- 3) Set D11 (MSB) through D0 (LSB) to the desired digital input code.
- 4) Load the word to the selected DAC by cycling  $\overline{WR1}$  and  $\overline{CS}$  through the following sequence:  
“1” — “0” — “1”
- 5) Repeat sequence for each input register.

To load a 12-bit word to the input register of each DAC, using an 8-bit data bus, the sequence is as follows:

- 1) Set  $\overline{XFER}=1$ ,  $B1/\overline{B2}=1$ ,  $\overline{CLR}=1$ ,  $\overline{WR1}=1$ ,  $\overline{WR2}=1$ ,  $\overline{CS}=1$ .
- 2) Set D11 through D4 to the 8 MSB's of the desired digital input code.
- 3) Load the 8 MSB's of the digital word to the selected input register by cycling  $\overline{WR1}$  and  $\overline{CS}$  through the “1” — “0” — “1” sequence.
- 4) Reset  $B1/\overline{B2}$  from “1” — “0”.
- 5) Set D11 (MSB) through D8 to the 4 LSB's of the digital input code.
- 6) Load the 4 LSB's by cycling  $\overline{WR1}$  and  $\overline{CS}$  through the “1” — “0” — “1” sequence.
- 7) Repeat sequence for each input register

## TRANSFERRING DATA

To transfer the 12-bit words in the two input registers to the two DAC registers:

- 1) Set  $\overline{CLR}=1$ ,  $\overline{CS}=1$ ,  $\overline{WR1}=1$ .

- 2) Cycle  $\overline{WR2}$  and  $\overline{XFER}$  through the “1” — “0” — “1” sequence.


To set the outputs of the two DAC's to 0V, cycle  $\overline{WR2}$  and  $\overline{CLR}$  through the “1” — “0” — “1” sequence, while keeping  $\overline{XFER}=1$ .

## ONE LATCH, OR NO LATCHES

The latches that form the registers can be used in a “semi-” transparent mode, and a “fully-” transparent mode. In order to use the **SP9502** in either mode the user must be interfaced to a 12-bit bus only ( $B1=1$ ).

The semi-transparent mode is set up such that the first set of latches is transparent and the second set is used to latch the incoming data. Data is latched into the second set rather than the first set, in order to minimize glitch energy induced from the data formatting. In this mode,  $\overline{WR1}$  and  $\overline{CS}$  are tied low, and  $\overline{WR2}$  and  $\overline{XFER}$  are used to strobe the data to the addressed DAC. Each DAC is addressed using the address line A. After the appropriate DAC has been selected and the data is settled at the digital inputs, bringing  $\overline{WR2}$  and  $\overline{XFER}$  low will transfer the data to the addressed DAC. The user should be sure to bring  $\overline{XFER}$  and  $\overline{WR2}$  high again so that the next selected DAC will not be overwritten by the last digital code. This mode of operation may be useful in applications where preloading of the input registers is not necessary; *Figure 3, top.*

A fully transparent mode is realized by tying  $\overline{WR1}$ ,  $\overline{CS}$ ,  $\overline{WR2}$ , and  $\overline{XFER}$  all low. In this mode, anything that is written on the 12-bit data bus will be passed directly to the selected DAC. Since both latches are not being used, the previous digital word will be overwritten by the new data as soon as the address changes. This may be useful should the user want to calibrate a circuit, by taking full scale or zero scale readings for both DAC's; *Figure 3, bottom.*



Set  $\overline{\text{WR}}1=1$ ,  $\overline{\text{CS}}=1$ ,  $\overline{\text{WR}}2=0$ ,  $\overline{\text{XFER}}=0$ . The DAC registers can be temporarily forced to 1000 0000 0000 by bringing the  $\overline{\text{CLR}}$  pin low. This will cause the DAC outputs to 0V, while the  $\overline{\text{CLR}}$  pin remains low. When the  $\overline{\text{CLR}}$  pin is brought back high, the digital code at the DAC registers will again appear at the DAC's digital inputs, and the analog outputs will return to their previous values.

**Table 2. Control Logic Truth Table**

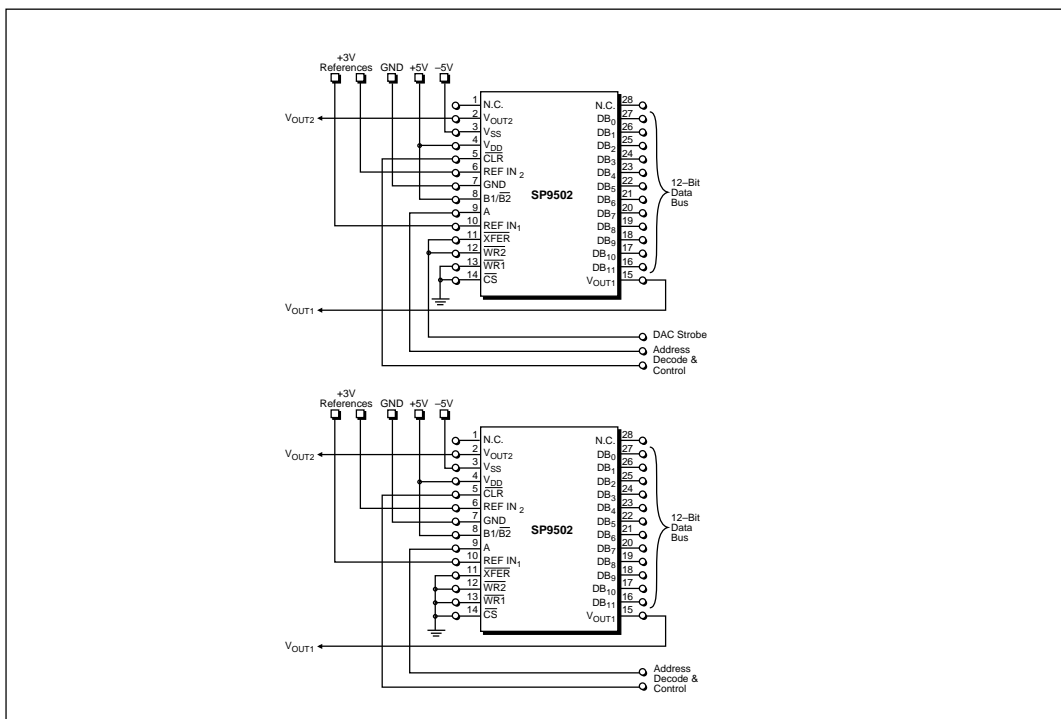


Figure 3. Latch Control Options — (Top) Semi-Transparent Latch Mode; (Bottom) Fully-Transparent Latch Mode


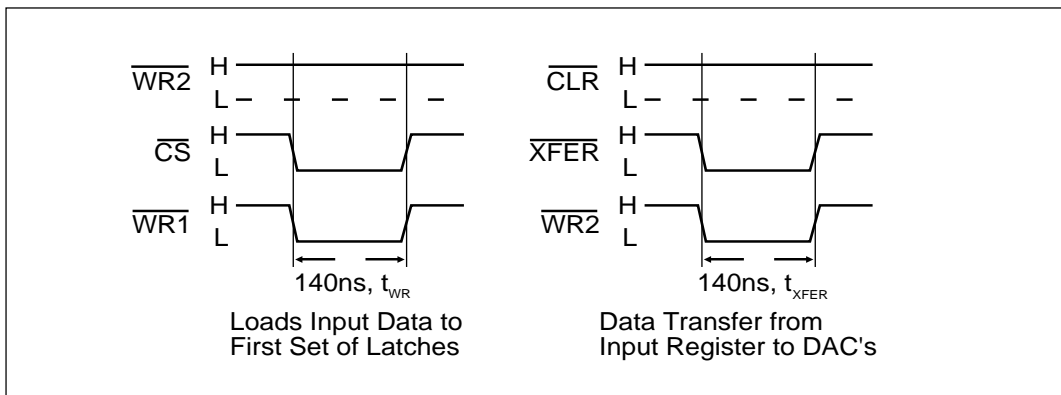


Figure 4. Timing





# PACKAGE: PLASTIC DUAL-IN-LINE (NARROW)

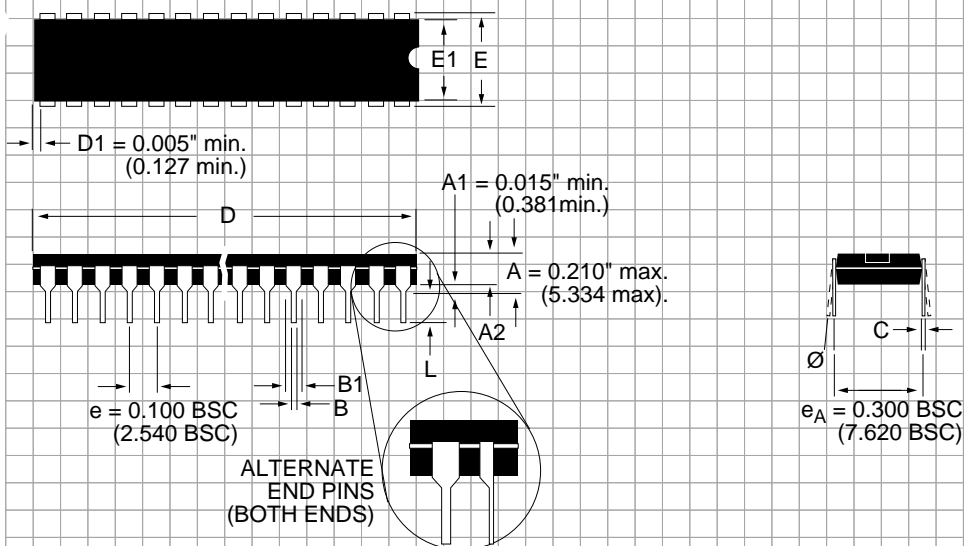

DIMENSIONS (Inches) Minimum/Maximum (mm)	24-PIN	28-PIN
A2	0.115/0.195 (2.921/4.953)	0.115/0.195 (2.921/4.953)
B	0.014/0.023 (0.356/0.584)	0.014/0.022 (0.356/0.559)
B1	0.045/0.070 (1.143/1.778)	0.045/0.070 (1.143/1.778)
C	0.008/0.014 (0.203/0.356)	0.008/0.014 (0.203/0.356)
D	1.155/1.280 (29.33/32.51)	1.385/1.454 (35.17/36.90)
E	0.300/0.325 (7.620/8.255)	0.300/0.325 (7.620/8.255)
E1	0.240/0.280 (6.096/7.112)	0.240/0.280 (6.096/7.112)
L	0.115/0.150 (2.921/3.810)	0.115/0.150 (2.921/3.810)
$\emptyset$	0°/ 15° (0°/15°)	0°/ 15° (0°/15°)

# **PACKAGE: PLASTIC SMALL OUTLINE (SOIC)**

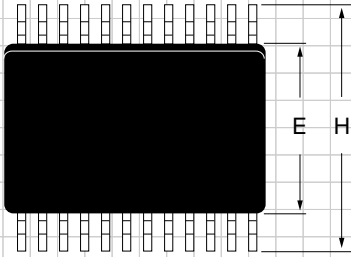

DIMENSIONS (Inches) Minimum/Maximum (mm)	14-PIN	16-PIN	18-PIN	20-PIN	24-PIN	28-PIN
A	0.090/0.104 (2.29/2.649)	0.090/0.104 (2.29/2.649)	0.090/0.104 (2.29/2.649)	0.090/0.104 (2.29/2.649)	0.090/0.104 (2.29/2.649)	0.090/0.104 (2.29/2.649)
A1	0.004/0.012 (0.102/0.300)	0.004/0.012 (0.102/0.300)	0.004/0.012 (0.102/0.300)	0.004/0.012 (0.102/0.300)	0.004/0.012 (0.102/0.300)	0.004/0.012 (0.102/0.300)
B	0.013/0.020 (0.330/0.508)	0.013/0.020 (0.330/0.508)	0.013/0.020 (0.330/0.508)	0.013/0.020 (0.330/0.508)	0.013/0.020 (0.330/0.508)	0.013/0.020 (0.330/0.508)
D	0.348/0.363 (8.83/9.22)	0.398/0.413 (10.10/10.49)	0.447/0.463 (11.35/11.74)	0.496/0.512 (12.60/13.00)	0.599/0.614 (15.20/15.59)	0.697/0.713 (17.70/18.09)
E	0.291/0.299 (7.402/7.600)	0.291/0.299 (7.402/7.600)	0.291/0.299 (7.402/7.600)	0.291/0.299 (7.402/7.600)	0.291/0.299 (7.402/7.600)	0.291/0.299 (7.402/7.600)
e	0.050 BSC (1.270 BSC)	0.050 BSC (1.270 BSC)	0.050 BSC (1.270 BSC)	0.050 BSC (1.270 BSC)	0.050 BSC (1.270 BSC)	0.050 BSC (1.270 BSC)
H	0.394/0.419 (10.00/10.64)	0.394/0.419 (10.00/10.64)	0.394/0.419 (10.00/10.64)	0.394/0.419 (10.00/10.64)	0.394/0.419 (10.00/10.64)	0.394/0.419 (10.00/10.64)
L	0.016/0.050 (0.406/1.270)	0.016/0.050 (0.406/1.270)	0.016/0.050 (0.406/1.270)	0.016/0.050 (0.406/1.270)	0.016/0.050 (0.406/1.270)	0.016/0.050 (0.406/1.270)
Ø	0°/8° (0°/8°)	0°/8° (0°/8°)	0°/8° (0°/8°)	0°/8° (0°/8°)	0°/8° (0°/8°)	0°/8° (0°/8°)

## ORDERING INFORMATION

Model .....	Temperature Range .....	Package
Monolithic 12-Bit Dual DAC Voltage Output:		
<b>SP9502JN</b> .....	0°C to +70°C .....	28-pin, 0.3" Plastic DIP
<b>SP9502KN</b> .....	0°C to +70°C .....	28-pin, 0.3" Plastic DIP
<b>SP9502JS</b> .....	0°C to +70°C .....	28-pin, 0.3" SOIC
<b>SP9502KS</b> .....	0°C to +70°C .....	28-pin, 0.3" SOIC

Please consult the factory for pricing and availability on a Tape-On-Reel option.



### SIGNAL PROCESSING EXCELLENCE

#### Sipex Corporation

##### Headquarters and Sales Office

22 Linnell Circle  
Billerica, MA 01821  
TEL: (978) 667-8700  
FAX: (978) 670-9001  
e-mail: sales@sipex.com

##### Sales Office

233 South Hillview Drive  
Milpitas, CA 95035  
TEL: (978) 934-7500  
FAX: (978) 935-7600

#### European Sales Offices:

##### ENGLAND:

Sipex Corporation  
2 Linden House  
Turk Street  
Alton Hampshire GU34 1AN  
England  
TEL: 44-1420-549527  
FAX: 44-1420-542700  
e-mail: mikeb@sipex.co.uk

##### GERMANY:

Sipex GmbH  
Gautinger Strasse 10  
82319 Starnberg  
TEL: 49.81.51.89810  
FAX: 49.81.51.29598  
e-mail: sipex-starnberg@t-online.de

#### Far East:

##### JAPAN:

Nippon Sipex Corporation  
Yahagi No. 2 Building  
3-5-3 Uchikanda, Chiyoda-ku  
Tokyo 101  
TEL: 81.3.3256.0577  
FAX: 81.3.3256.0621

Sipex Corporation reserves the right to make changes to any products described herein. Sipex does not assume any liability arising out of the application or use of any product or circuit described hereing; neither does it convey any license under its patent rights nor the rights of others.