


400mA Low Dropout Voltage Regulator

FEATURES

- 5V Fixed Output
- High Accuracy
- Very Low Current Consumption: 60 μ A
- Power-on and Under Voltage Reset
- Reset Low Down to $V_{OUT} = 1V$
- Extremely Low Dropout Voltage
- Short Circuit Protection
- Programmable Safety Timer
- 4kV ESD Protection

APPLICATIONS

- Automotive Electronics
- Wireless Station
- Industrial Systems

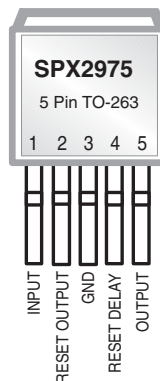


Now Available in Lead Free Packaging

DESCRIPTION

Sipex's SPX2975 is a low dropout linear regulator with integrated PNP pass transistor. The part is available in a 5 pin TO-220 package or surface mount TO-263. The part is set at a fixed 5V output guaranteed to deliver at least 400mA. Internal power consumption is kept to 60uA ideal for applications where micro-power operation is important. At over-temperature the SPX2975 is turned off by the integrated temperature protection circuit. A reset signal is generated for a typical output voltage of 4.65V with a time delay that can be programmed by an external delay capacitor.

TYPICAL APPLICATION CIRCUIT

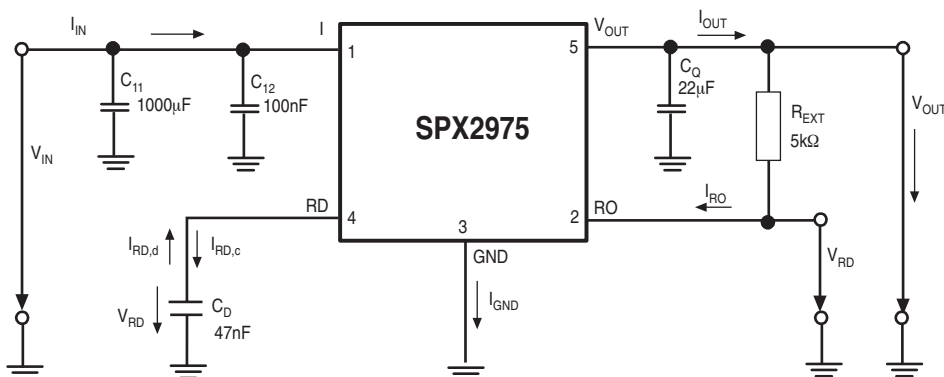

ABSOLUTE MAXIMUM RATINGS

Input Voltage	-42V to 45V
Output Voltage	-1.0 to 16V
Output Current	Internally limited
Reset Output Voltage	-0.3 to 25V
Reset Output Current	5mA to +5mA
Reset Delay Voltage	-0.3V to 7.0V
Reset Delay Current	-2mA to 2mA
Storage Temperature	-50°C to +150°C
Junction Temperature.(Note 1)	-40°C to +150°C


These are stress ratings only and functional operation of the device at these ratings or any other above those indicated in the operation sections of the specifications below is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

ELECTRICAL CHARACTERISTICS

$V_{IN} = 13.5V$; $-40^{\circ}C < T_j < 150^{\circ}C$. Unless otherwise specified.


PARAMETER	MIN	TYP	MAX	UNITS	CONDITIONS
Input Voltage	5.5		42	V	
Junction Temperature	-40		150	C	
Output Voltage	4.9	5.0	5.1	V	$5mA < I_Q < 400mA$ $6V < V_I < 28V$
Output Voltage	4.9	5.0	5.1	V	$5mA < I_Q < 200mA$ $6V < V_I < 40V$
Output Current limitation	450	700		V	
Output Leakage Current		0.1	100	μA	
Current Consumption		70	200	μA	$I_{OUT} = 1mA$
Current Consumption		7	10	mA	$I_{OUT} = 250mA$
Current Consumption		17	22	mA	$I_{OUT} = 400mA$
Dropout Voltage		350	500	mV	$I_{OUT} = 300mA$ $V_{DO} = V_{OUT} - V_{IN}$
Load Regulation		5	30	mV	$I_{OUT} = 5mA$ to 400mA
Line Regulation	-15	2	15	mV	$V_{IN} = 8V$ to 32V $I_{OUT} = 5mA$
PSRR		60		dB	fr = 100Hz; Vr = 0.5Vpp
Temperature Output Voltage Drift		0.2		mV/K	
Reset Switching Threshold	4.5	4.65	4.8	V	V_{TH}
Reset Output Low Voltage		0.2	0.4	V	$R_{EXT} \geq 5k\Omega$; $V_{OUT} > 1V$
Reset Output Leakage Current		0	10	μA	$V_{ROH} = 5V$
Reset Charging Current	3.0	5.5	9.0	μA	$V_{RD} = 1V$
Upper Timing Threshold	1.5	1.8	2.2	V	V_{thH}
Lower Timing Threshold	0.2	0.4	0.7	V	V_{thL}
Reset Delay Time	10	16	22	mS	$C_O = 47nF$, Td
Reset Reaction Time		0.5	2.0	μs	$C_O = 47nF$, Trv

Note 1: Specifications in the $-40^{\circ}C$ to $150^{\circ}C$ range are guaranteed by design, not production tested.




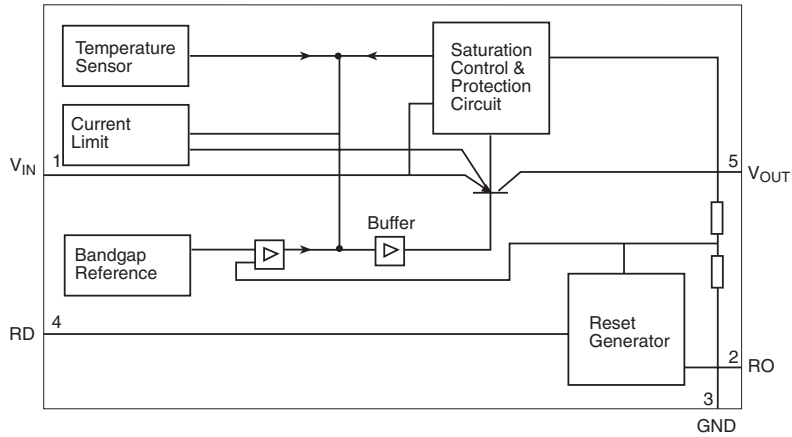






PIN DESCRIPTION



PIN NUMBER	PIN NAME	DESCRIPTION
1	V_{IN}	LDO Input. Bypass V_{IN} to GND with a Ceramic capacitor.
2	RO	Reset Output. RO remains low while V_{OUT} is below the reset switching threshold. RO is in open collector output.
3	GND	Ground. This pin also functions as a heatsink. Solder to large pads or the circuit-board ground plane to maximize thermal dissipation.
4	RD	Reset Delay. RD connects capacitor to GND for setting delay time.
5	V_{OUT}	LDO Output. Bypass V_{OUT} to GND with a minimum 22 μ F capacitor with ESR less than 5 Ω at 10kHz.

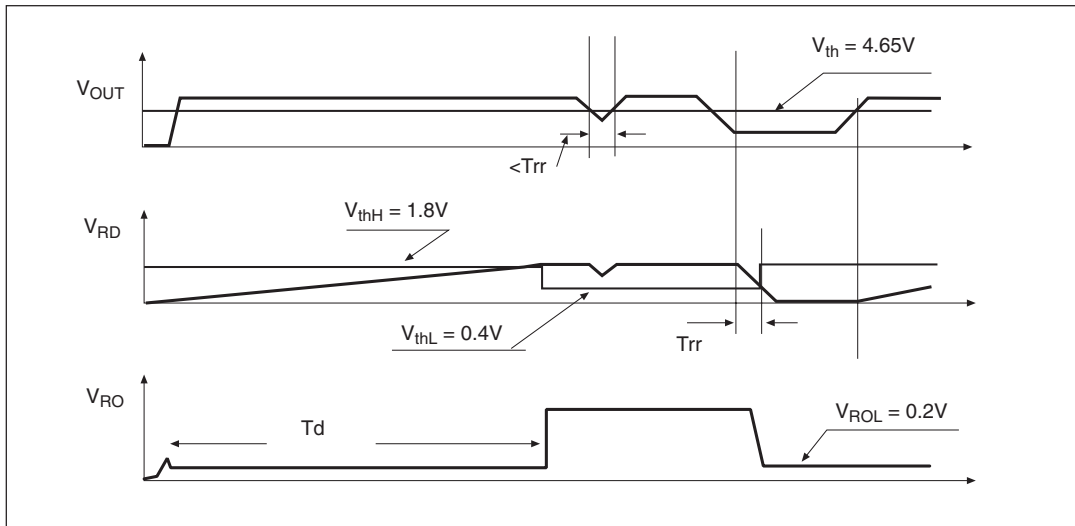

Reset Timing

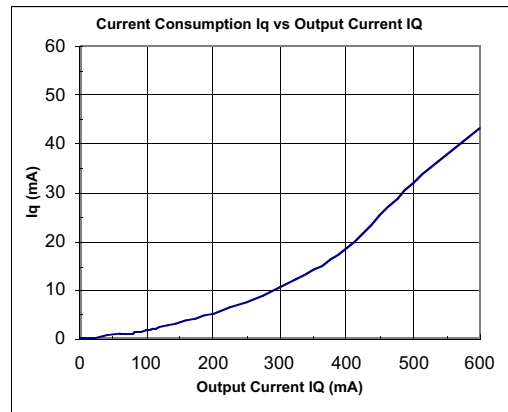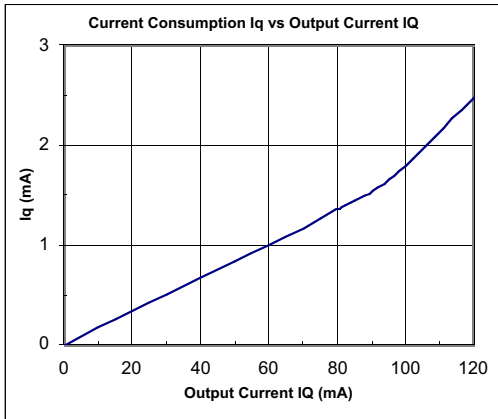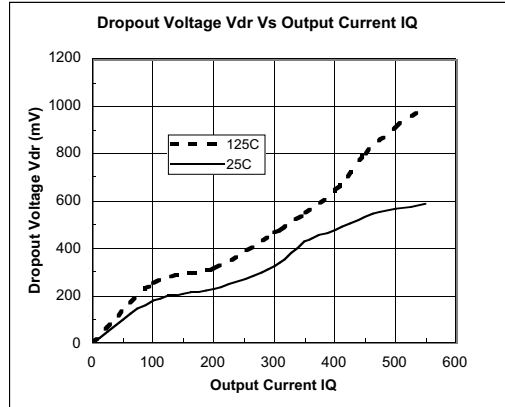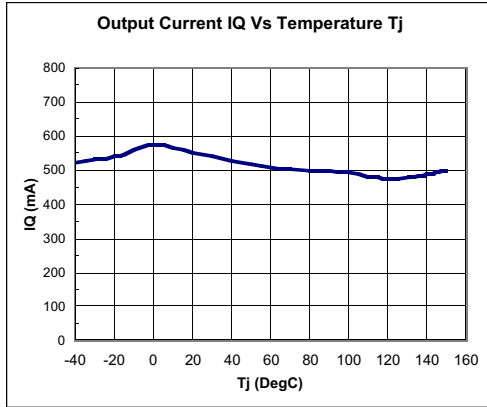


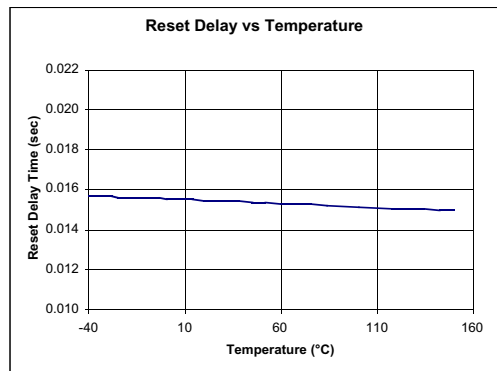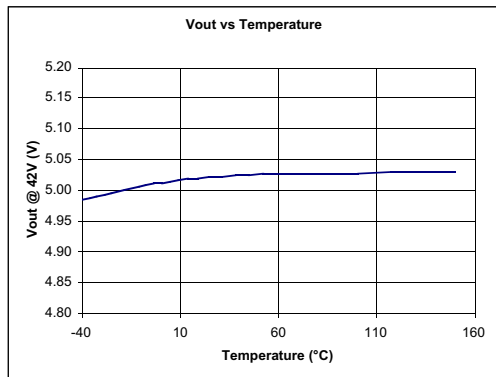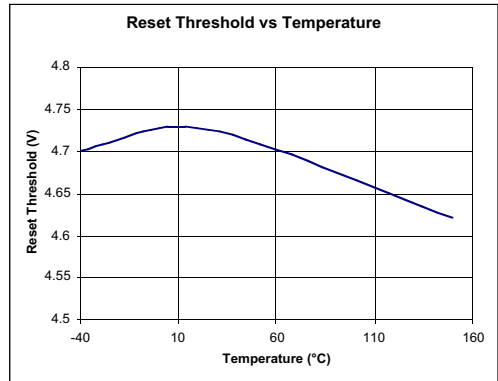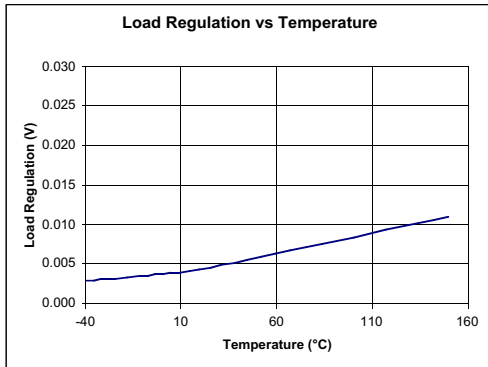



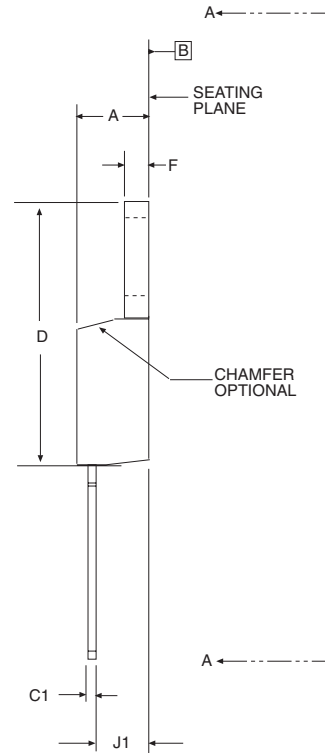
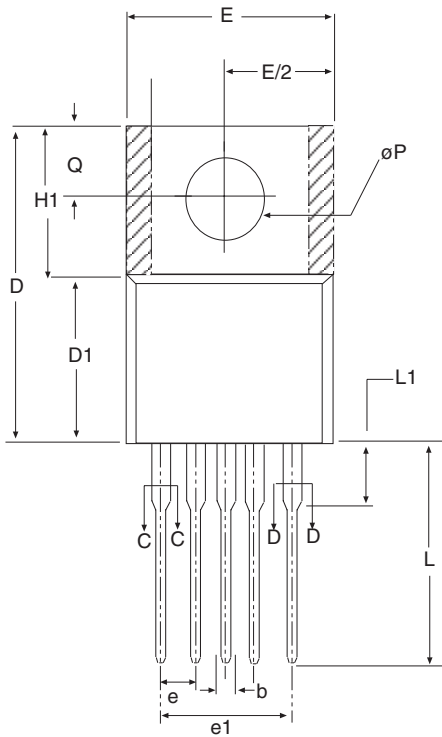


5 PIN TO-220	Dimensions in (inches)		
	MIN	NOM	MAX
A	.160	-	.190
b	.015	-	.040
C1	.014	-	.022
D	.560	-	.590
E	.385	-	.415
e	.385	-	.415
e1	.062	-	.072
F	.045	-	.055
H1	.234	-	.258
J1	.090	-	.115
L	.540	-	.560
L1		-	.250
ΔP	.146	-	.156
Q	.103	-	.113
U	-	.30	-
V	-	.24	-

5 PIN TO-220

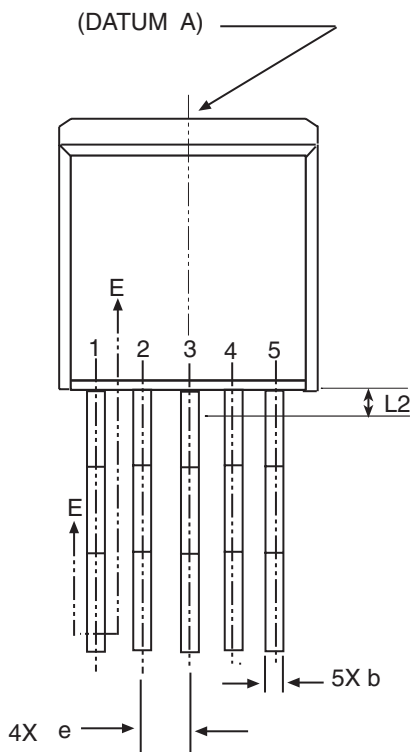

5 PIN TO-263 JEDEC TO-263 (BB) Variation	Dimensions in (mm)		
	MIN	NOM	MAX
A	.160	-	.190
A1	0	-	.010
b	.020	-	.039
c	.015	-	.029
c2	.045	-	.023
D1	.270	-	-
E	.380	-	.420
E1	.245	-	-
e	.067 BSC		
H	.575	-	.625
L	.070	-	.110
L1	-	-	.066
L2	-	-	.070
L3	.010 BSC		

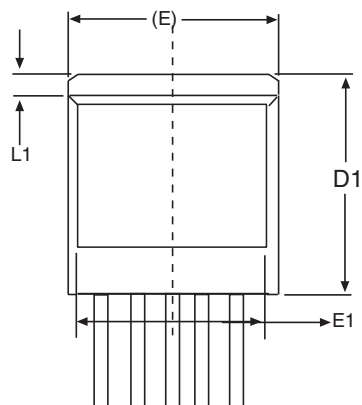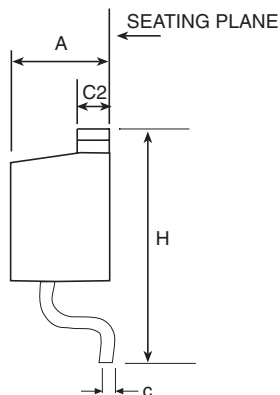

CONTACT AREA

5 PIN TO-263

Part number	Top Mark	Accuracy	Output Voltage	Package Type
SPX2975U	SPX2975U550YYWW.....	2%	5.0V	5 Lead TO-220
SPX2975T	SPX2975T550YYWW.....	2%	5.0V	5 Lead TO-263
SPX2975T/TR.	SPX2975T550YYWW.....	2%	5.0V	5 Lead TO-263

Available in lead free packaging. To order add "-L" suffix to part number.

Example: SPX2975T/TR = standard; SPX2975T-L/TR = lead free

/TR = Tape and Reel

Pack quantity is 500 for TO-263.



ANALOG EXCELLENCE

Sipex Corporation

**Headquarters and
Sales Office**
233 South Hillview Drive
Milpitas, CA 95035
TEL: (408) 934-7500
FAX: (408) 935-7600

Sipex Corporation reserves the right to make changes to any products described herein. Sipex does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.