

**STPR320**

ULTRA-FAST RECOVERY RECTIFIER DIODES

MAIN PRODUCT CHARACTERISTICS

$I_F(\text{AV})$	3 A
V_{RRM}	200 V
$T_j(\text{max})$	150°C
$V_F(\text{max})$	0.99 V
$t_{\text{rr}}(\text{max})$	30 ns


FEATURES

- SUITED FOR SMPS
- LOW LOSSES
- LOW FORWARD AND REVERSE RECOVERY TIME
- HIGH SURGE CURRENT CAPABILITY

DESCRIPTION

Low cost single chip rectifier suited for Switched Mode Power Supplies and high frequency DC to DC converters.

Packaged in F126, this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

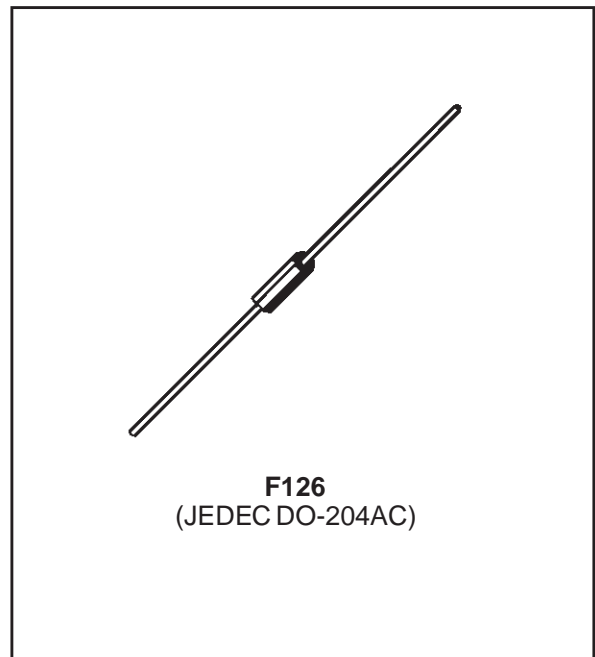

ABSOLUTE MAXIMUM (limiting values)

Symbol	Parameter		Value	Unit
V_{RRM}	Repetitive peak reverse voltage		200	V
$I_F(\text{AV})$	Average forward current	$T_I=60^\circ\text{C}$ $\delta = 0.5$	3	A
I_{FSM}	Surge non repetitive forward current	$t_p=10\text{ms}$ sinusoidal	30	A
T_{stg}	Storage temperature range		- 65 to + 150	°C
T_j	Maximum operating junction temperature		150	°C

STPR320

THERMAL RESISTANCE

Symbol	Parameter	Value	Unit
$R_{th(j-l)}$	Junction lead (L=5mm)	25	°C/W

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Parameters	Test conditions		Min.	Typ.	Max.	Unit
I_R^*	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			10	μA
		$T_j = 100^\circ\text{C}$			0.2	0.5	mA
V_F^{**}	Forward voltage drop	$T_j = 125^\circ\text{C}$	$I_F = 3\text{ A}$		0.8	0.99	V
		$T_j = 125^\circ\text{C}$	$I_F = 6\text{ A}$		0.95	1.20	
		$T_j = 25^\circ\text{C}$	$I_F = 6\text{ A}$			1.25	

Pulse test : * $t_p = 5\text{ ms}$, $\delta < 2\%$

** $t_p = 380\text{ }\mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses use the following equation :

$$P = 0.78 \times I_{F(AV)} + 0.070 \times I_{F(RMS)}^2$$

RECOVERY CHARACTERISTICS

Symbol	Test conditions			Min.	Typ.	Max.	Unit
t_{rr}	$T_j = 25^\circ\text{C}$	$I_F = 0.5\text{ A}$ $I_R = 1\text{ A}$	$I_{rr} = 0.25\text{ A}$			30	ns
t_{fr}	$T_j = 25^\circ\text{C}$	$I_F = 3\text{ A}$ $V_{FR} = 1.1 \times V_F \text{ max}$	$dI_F/dt = 50\text{ A}/\mu\text{s}$		20		ns
V_{FP}	$T_j = 25^\circ\text{C}$	$I_F = 3\text{ A}$	$dI_F/dt = 50\text{ A}/\mu\text{s}$		3		V

Fig. 1 : Average forward power dissipation versus average forward current.

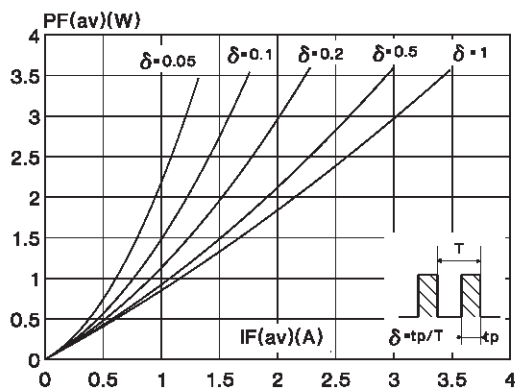


Fig. 2 : Peak current versus form factor.

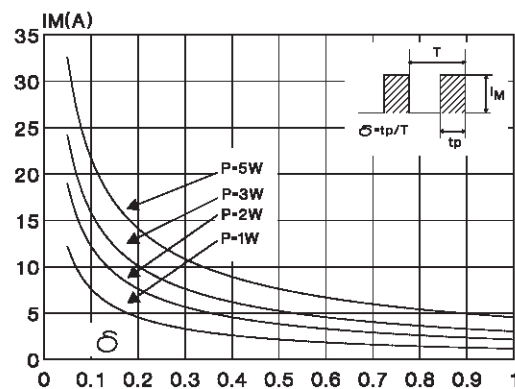


Fig. 3: Average current versus ambient temperature ($\delta : 0.5$)
 * circuit board e (Cu) = $35\mu\text{m}$, S (cu) = 12mm^2
 $L_{(\text{LEADS})} = 20\text{mm}$

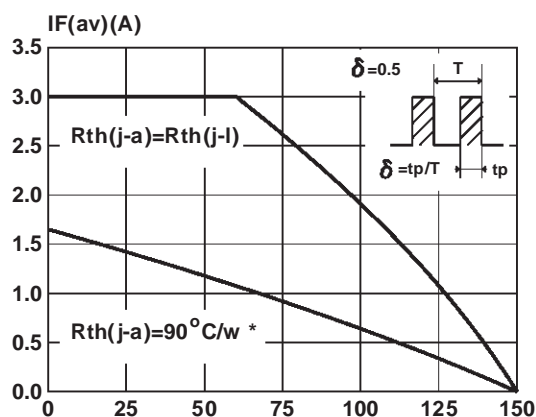


Fig. 5: Relative variation of thermal transient impedance junction to case versus pulse duration.

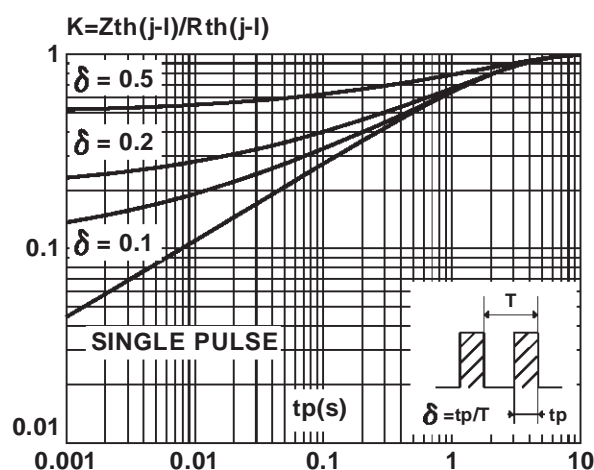


Fig 7: Junction capacitance versus reverse voltage applied (typical values).

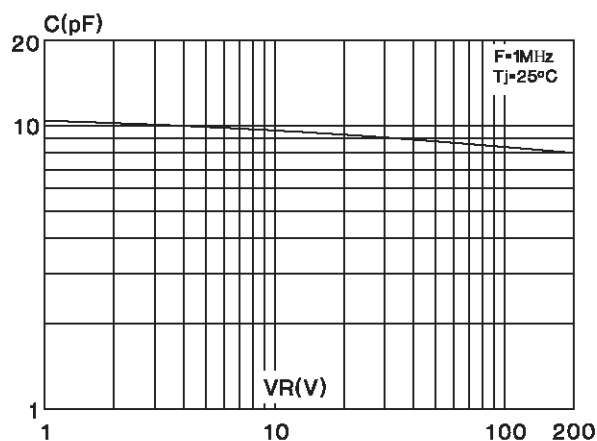


Fig. 4: Non repetitive surge peak forward current versus overload duration (maximum values).

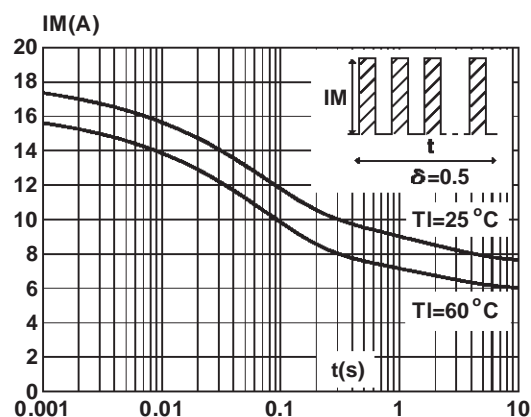


Fig. 6: Forward voltage drop versus forward current (maximum values).

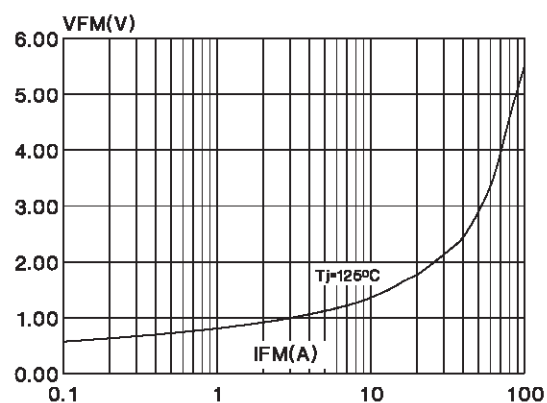


Fig. 8: Recovery charges versus dI_F/dt .

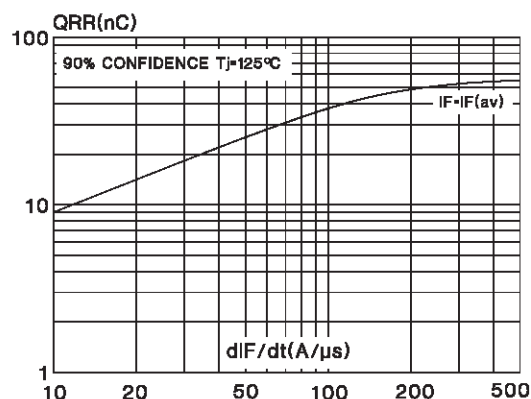


Fig. 9: Peak reverse current versus dI_F/dt .



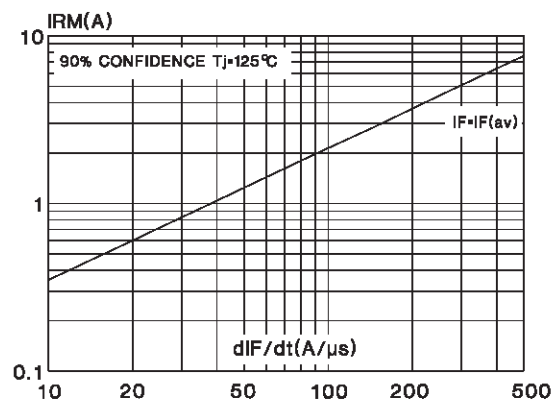


Fig. 10: Dynamic parameters versus junction temperature.

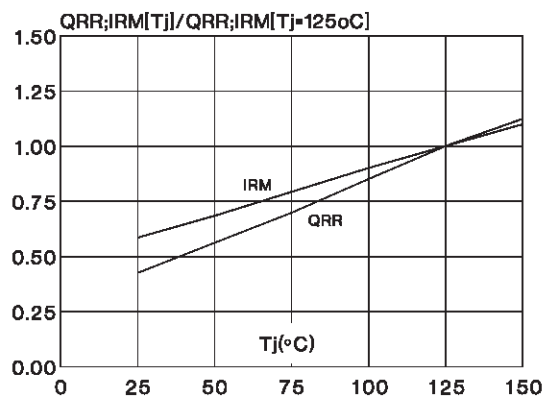

PACKAGE MECHANICAL DATA

F126

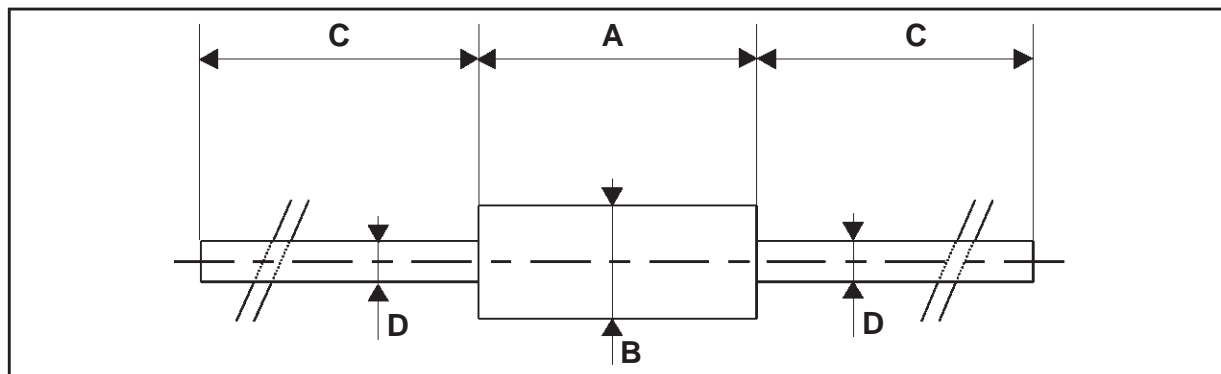

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	6.05	6.20	6.35	0.238	0.244	0.250
B	2.95	3.00	3.05	0.116	0.118	0.120
C	26		31	1.024		1.220
D	0.76	0.81	0.86	0.030	0.032	0.034

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STPR320	STPR320	F126	0.4g	1000	Ammopack

- Cooling method : by conduction (C)
- Epoxy meets UL94,V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1999 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>