

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07451 DT-33-11

2SC1617

SILICON NPN TRIPLE DIFFUSED TYPE

BLACK AND WHITE TV HORIZONTAL OUTPUT
APPLICATIONS.

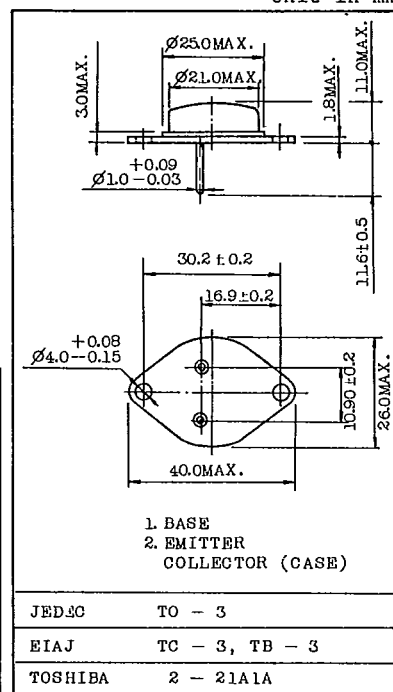
FEATURES;

- High Voltage : $V_{CBO}=300V$
- Wide Safe Operating Area.

MAXIMUM RATINGS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	300	V
Collector-Emitter Voltage	V_{CEO}	100	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	7	A
Emitter Current	I_E	-7	A
Collector Power Dissipation	P_C	50	W
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature Range	T_{stg}	-55~150	$^\circ C$

Unit in mm



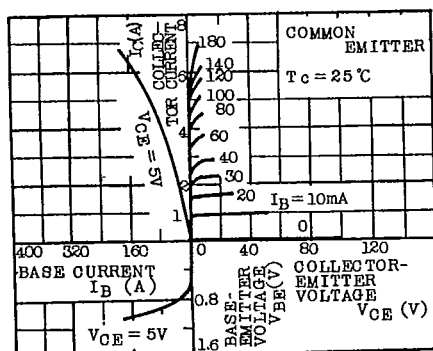
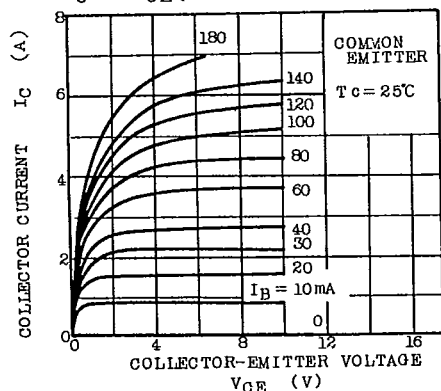
Mounting kit No. AC73
Weight : 12.0g

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)

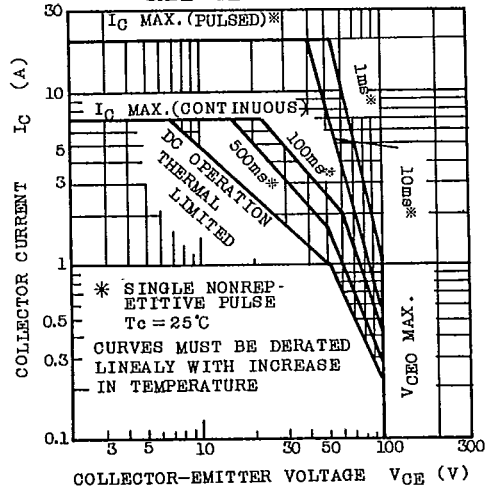
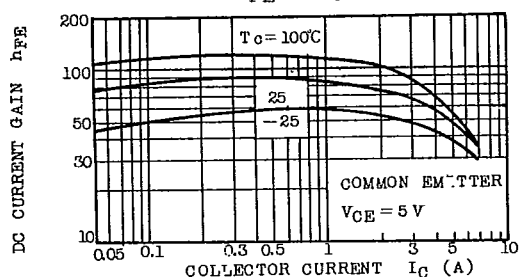
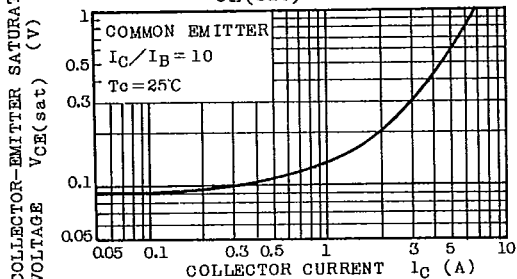
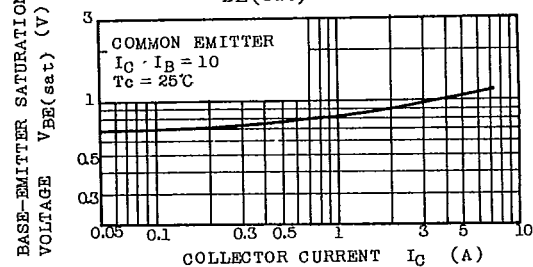
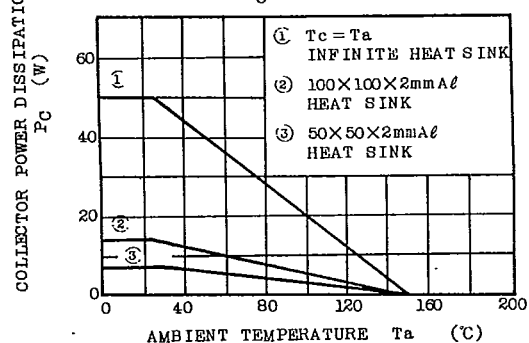
CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		I_{CB0}	$V_{CB}=250V, I_E=0$	-	-	1.0	mA
Emitter Cut-off Current		I_{EB0}	$V_{EB}=5V, I_C=0$	-	-	1.0	mA
DC Current Gain		$h_{FE}(1)$	$V_{CE}=5V, I_C=1A$	30	-	150	
		$h_{FE}(2)$	$V_{CE}=5V, I_C=7A$	15	-	-	
Saturation Voltage	Collector-Emitter	$V_{CE(sat)}$	$I_C=5A, I_B=0.5A$	-	-	1.2	V
	Base-Emitter	$V_{BE(sat)}$	$I_C=5A, I_B=0.5A$	-	-	1.5	
Transition Frequency		f_T	$V_{CE}=5V, I_C=0.5A$	-	10	-	MHz

56C 07452 D T-33-11

STATIC CHARACTERISTICS


$$I_C - V_{CE}(\text{LOW VOLTAGE REGION})$$


SAFE OPERATING AREA


$$h_{FE} = I_C$$

$$V_{CE(sat)} \approx I_C$$

$$V_{BE(sat)} - I_C$$

$$P_C - Ta$$


TOSHIBA CORPORATION