



SRD620 THRU SRD660

6.0 AMPS. Schottky Barrier Rectifiers



Voltage Range
20 to 60 Volts
Current
6.0 Amperes


Features

- Extremely fast switching
- Extremely low forward drop
- Guaranteed reverse avalanche

Mechanical Data

- Cases: Epoxy, molded
- Weight: 0.4 gram (approximately)
- Finish: All external surfaces corrosion resistant and terminal leads are readily solderable
- Lead and mounting surface temperature for soldering purposes: 260°C max. for 10 seconds
- Shipped 75 units per plastic tube
- Marking: SRD620, SRD630, SRD640, SRD650, SRD660

D'PAK

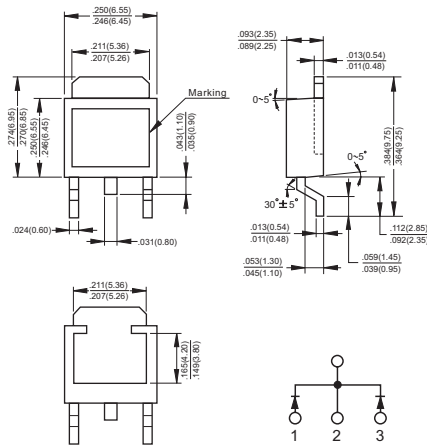

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SRD 620	SRD 630	SRD 640	SRD 650	SRD 660	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	V
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	V
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	V
Maximum Average Forward Rectified Current at T _C = 100°C	I _(AV)	6.0					A
Nonrepetitive Peak Surge Current (Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60 HZ)	I _{FSM}	75					A
Peak Repetitive Reverse Surge Current (Note 1)	I _{RRM}	1.0					A
Maximum Instantaneous Forward Voltage @ 3.0A	V _F	0.55			0.7		V
Maximum D.C. Reverse Current @ T _C =25°C at Rated DC Blocking Voltage @ T _C =125°C	I _R	0.3 15					mA mA
Maximum Thermal Resistance Per Leg (Note 2)	R _θ JC R _θ JA	6 80					°C/W
Operating Junction Temperature Range	T _J	-65 to +125					°C
Storage Temperature Range	T _{STG}	-65 to +150					°C

Notes: 1. 2.0us Pulse Width, $f=1.0\text{KHz}$.

2. Thermal Resistance from Junction to Case and Thermal Resistance from Junction to Ambient.

RATINGS AND CHARACTERISTIC CURVES (SRD620 THRU SRD660)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

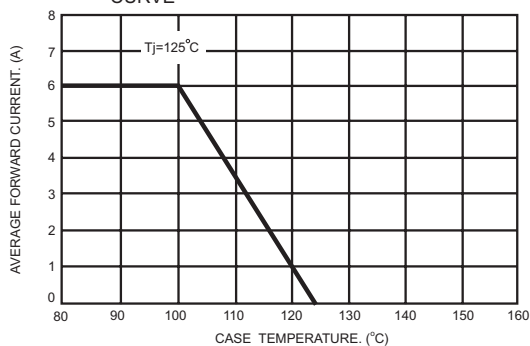


FIG.2- TYPICAL JUNCTION CAPACITANCE PER LEG

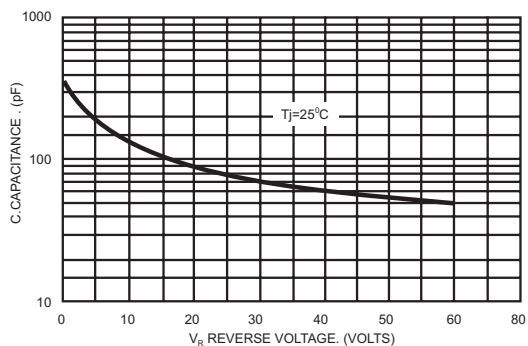


FIG.3- TYPICAL REVERSE CHARACTERISTICS PER LEG

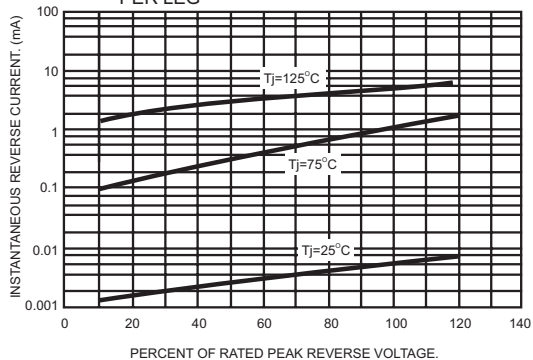


FIG.4- TYPICAL FORWARD CHARACTERISTICS PER LEG

