





## Surface Mount Glass Passivated Junction Fast Switching Rectifier

Reverse Voltage 50 to 1000V  
Forward Current 1.0A

DO-214BA (GF1)

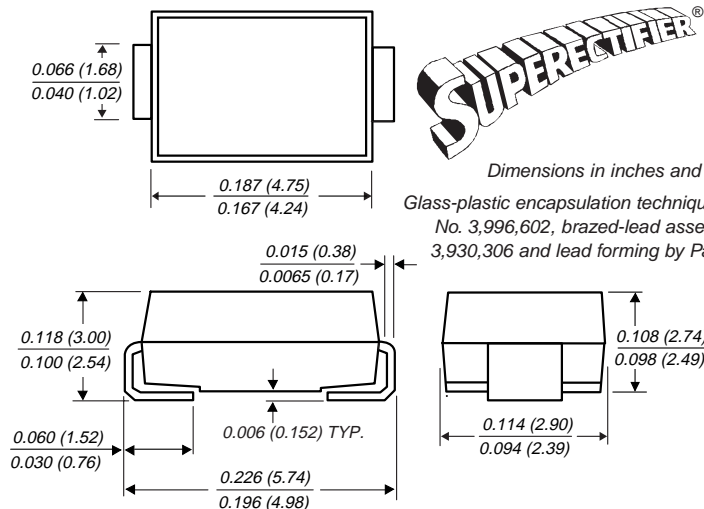

Mounting Pad Layout

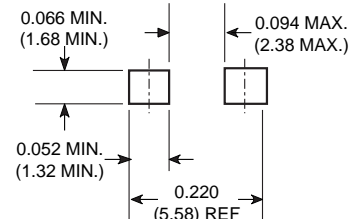

### Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Ideal for surface mount automotive applications
- High temperature metallurgically bonded construction
- Cavity-free glass passivated junction
- Capable of meeting environmental standards of MIL-S-19500
- Built-in strain relief • Easy pick and place
- Fast switching for high efficiency
- High temperature soldering guaranteed: 450°C/5 seconds at terminals.
- Complete device submersible temperature of 265°C for 10 seconds in solder bath

### Mechanical Data

**Case:** JEDEC DO-214BA, molded plastic over glass body

**Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any **Weight:** 0.0048 oz, 0.12 g

**Packaging codes/options:**

19/6.5K per 13" Reel (12mm Tape)

17/1.5K per 7" Reel (12mm Tape)

### Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	RGF1A	RGF1B	RGF1D	RGF1G	RGF1J	RGF1K	RGF1M	Unit
Device marking code		RA	RB	RD	RG	RJ	RK	RM	
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at T <sub>L</sub> = 120°C	I <sub>F(AV)</sub>	1.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	30							A
Max. full load reverse current, full cycle average T <sub>A</sub> = 55°C	I <sub>R(AV)</sub>	50							μA
Typical thermal resistance <sup>(1)</sup>	R <sub>θJA</sub>	80							°C/W
	R <sub>θJL</sub>	28							
Operating junction and storage temperature range	T <sub>J</sub> ,T <sub>STG</sub>	−65 to +175							°C

### Electrical Characteristics


( $T_J = 25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	RGF1A	RGF1B	RGF1D	RGF1G	RGF1J	RGF1K	RGF1M	Unit
Maximum instantaneous forward voltage at 1.0A	V <sub>F</sub>	1.30							V
Maximum DC reverse current at rated DC blocking voltage	I <sub>R</sub>	5.0 100							μA
Typical reverse recovery time at I <sub>F</sub> = 0.5A, I <sub>R</sub> = 1.0A, I <sub>rr</sub> = 0.25 A	t <sub>rr</sub>	150				250	500		ns
Typical junction capacitance at 4.0V, 1MHz	C <sub>J</sub>	8.5							pF


**Note:** (1) Thermal resistance from junction to ambient and from junction to lead, P.C.B. mounted on 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas

## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)


**Fig. 1 – Forward Current  
Derating Curve**

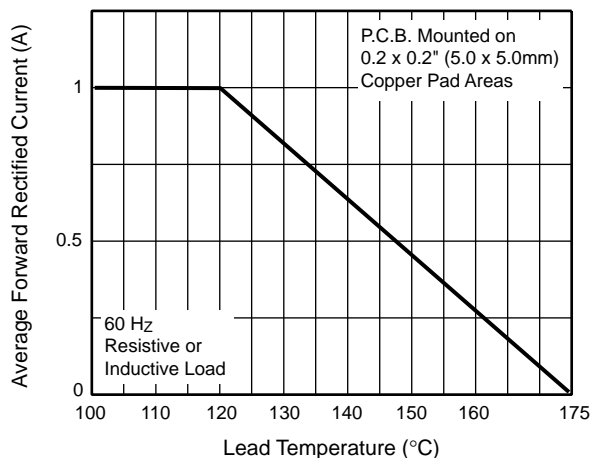


**Fig. 2 – Maximum Non-Repetitive  
Peak Forward Surge Current**

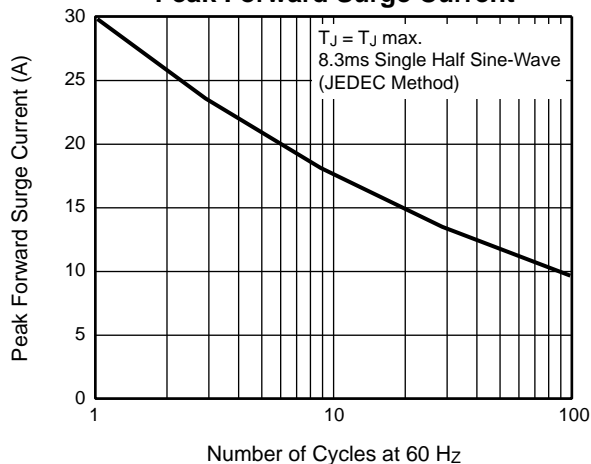


**Fig. 3 – Typical Instantaneous  
Forward Characteristics**

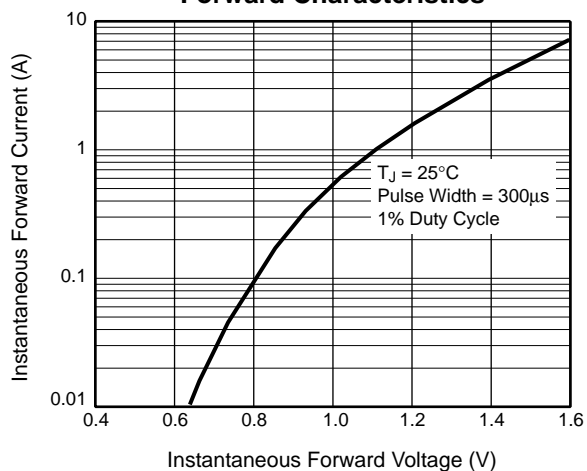

**Fig. 4 – Typical Reverse  
Characteristics**

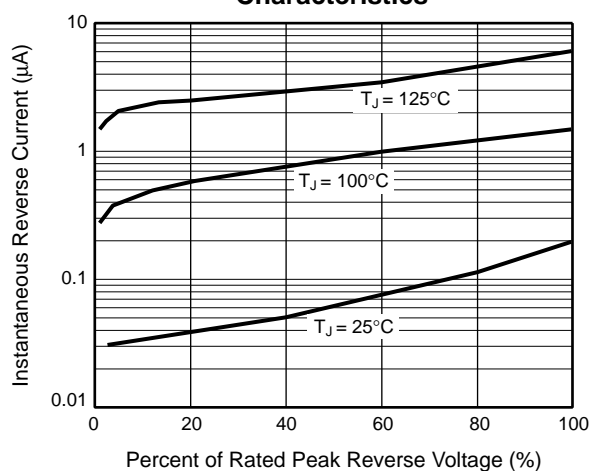

**Fig. 5 – Typical Junction  
Capacitance**

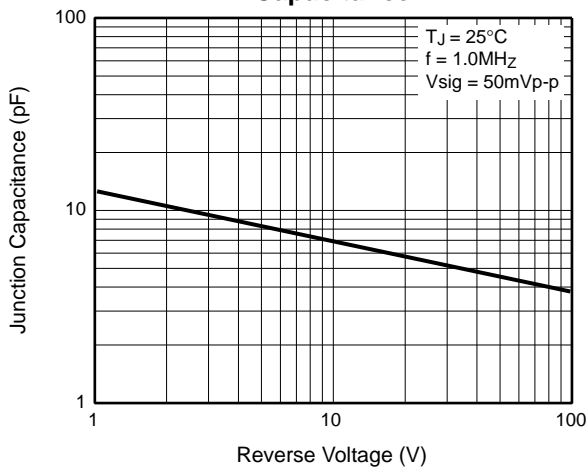

**Fig. 6 – Typical Transient  
Thermal Impedance**

