


Power Metal Strip® Resistors, Low Value, Surface Mount



FEATURES

- Molded high temperature encapsulation
- Ideal for all types of current sensing, voltage division and pulse applications including switching and linear power supplies, instruments, power amplifiers
- Proprietary processing technique produces extremely low resistance values
- All welded construction
- Solid metal Nickel-chrome or Manganese-copper alloy resistive element with low TCR ($< 20 \text{ ppm}^{\circ}\text{C}$)
- Solderable terminations
- Very low inductance 0.5 nH to 5 nH
- Excellent frequency response
- Low thermal EMF
- Lead (Pb)-Free version is RoHS Compliant

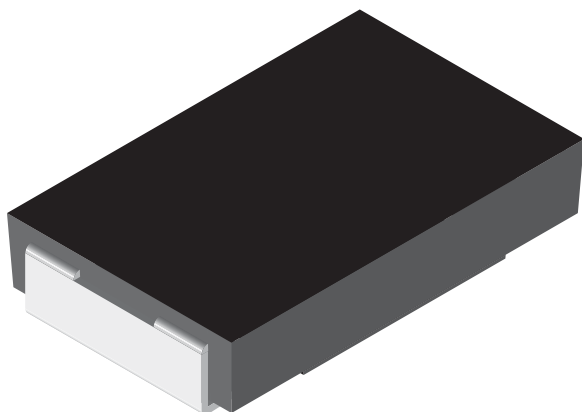

RoHS*
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS

GLOBAL MODEL	SIZE	POWER RATING $P_{70^{\circ}\text{C}}$ W	RESISTANCE RANGE Ω	
			$\pm 0.5\%$	$\pm 1.0\%$
WSR2	4527	2.0	0.01 - 1.0	0.001 - 1.0
WSR3	4527	3.0*	0.01 - 0.2	0.001 - 0.2

*The WSR3 requires a minimum of 1050 sq. mil. circuit traces connecting to the recommended solder pad


• Part Marking: DALE, Model, Value, Tolerance, Date Code

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	WSR2 & WSR3
Temperature Coefficient	$\text{ppm}/^{\circ}\text{C}$	$0.005\Omega - 0.0099\Omega = \pm 110$ $0.010\Omega - 1.0\Omega = \pm 75$
Dielectric Withstanding Voltage	V_{AC}	> 500
Insulation Resistance	Ω	$> 10^9$
Operating Temperature Range	$^{\circ}\text{C}$	$- 65/+ 275$
Maximum Working Voltage	V	$(P \times R)^{1/2}$
Weight/1000 pieces (typical)	g	440

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: WSR25L000FEA (preferred part numbering format)

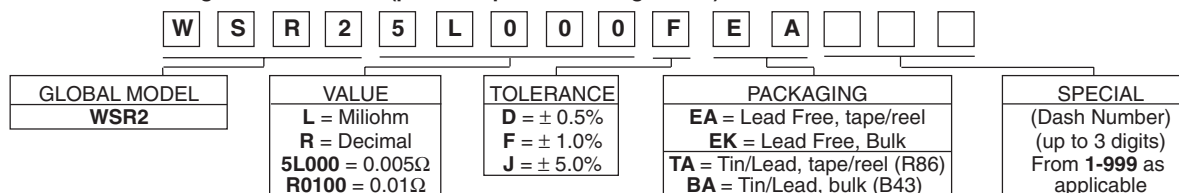


Historical Part Number example: WSR2 0.005 Ω 1% EA (will continue to be accepted)



* Pb containing terminations are not RoHS compliant, exemptions may apply




DIMENSIONS

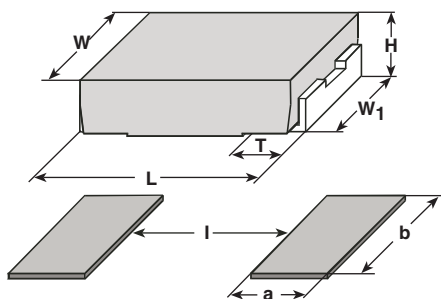

MODEL	DIMENSIONS in inches [millimeters]				
	L	H	T	W	W ₁
WSR2	0.455 ± 0.032	0.095 ± 0.005	0.100 ± 0.010	0.275 ± 0.005	0.215 ± 0.005
WSR3	[11.56 ± 0.813]	[2.41 ± 0.127]	[2.54 ± 0.254]	[6.98 ± 0.127]	[5.46 ± 0.127]

MODEL	SOLDER PAD DIMENSIONS in inches [millimeters]		
	a	b	l
WSR2	0.155	0.230	0.205
WSR3	[3.94]	[5.84]	[5.21]

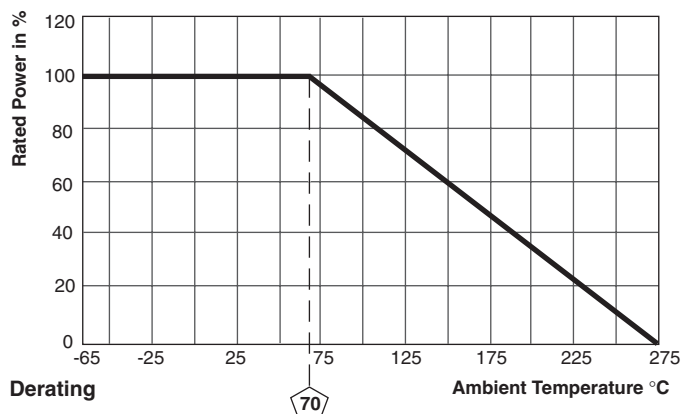

PERFORMANCE

TEST	CONDITIONS OF TEST	TEST LIMITS	
		WSR2	WSR3
Thermal Shock	- 55°C to + 150°C, 1000 cycles, 15 minutes at each extreme	± (0.5% + 0.0005Ω) ΔR	± (0.5% + 0.0005Ω) ΔR
Short Time Overload	WSR2: 5 x rated power for 5 sec. WSR3: 4 x rated power for 5 sec.	± (0.5% + 0.0005Ω) ΔR	± (2.0% + 0.0005Ω) ΔR
Low Temperature Storage	- 65°C for 24 hours	± (0.5% + 0.0005Ω) ΔR	± (0.5% + 0.0005Ω) ΔR
High Temperature Exposure	1000 hours @ + 275°C	± (1.0% + 0.0005Ω) ΔR	± (1.0% + 0.0005Ω) ΔR
Bias Humidity	+ 85°C, 85% RH, 10% Bias, 1000 hours	± (0.5% + 0.0005Ω) ΔR	± (0.5% + 0.0005Ω) ΔR
Mechanical Shock	100g's for 6 milliseconds, 5 pulses	± (0.5% + 0.0005Ω) ΔR	± (0.5% + 0.0005Ω) ΔR
Vibration	Frequency varied 10 to 2000Hz in one minute, 3 directions, 12 hours	± (0.5% + 0.0005Ω) ΔR	± (0.5% + 0.0005Ω) ΔR
Load Life	1000 hours @ rated power, + 70°C, 1.5 hours "ON", 0.5 hours "OFF"	± (1.0% + 0.0005Ω) ΔR	± (2.0% + 0.0005Ω) ΔR
Resistance to Solder Heat	+ 260°C Solder, 10 -12 second dwell, 25mm/second emergence	± (0.5% + 0.0005Ω) ΔR	± (0.5% + 0.0005Ω) ΔR
Moisture Resistance	MIL-STD-202 Method 106, 0% power, 7a and 7b not required	± (0.5% + 0.0005Ω) ΔR	± (0.5% + 0.0005Ω) ΔR

PACKAGING

MODEL	REEL			
	TAPE WIDTH	DIAMETER	PIECES/REEL	CODE
WSR2 & WSR3	24mm/Embossed Plastic	330mm/13"	1500	EA

Embossed Carrier Tape per EIA-481-2.



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.