

ZXTDAM832

MPPS™ Miniature Package Power Solutions DUAL 15V NPN LOW SATURATION SWITCHING TRANSISTOR

SUMMARY

$V_{CEO}=15V$; $R_{SAT} = 45m\Omega$; $I_C= 4.5A$

DESCRIPTION

Packaged in the innovative 3mm x 2mm MLP (Micro Leaded Package) outline, these new 4th generation low saturation dual transistors offer extremely low on state losses making them ideal for use in DC-DC circuits and various driving and power management functions.

Additionally users gain several other **key benefits**:


Performance capability equivalent to much larger packages

Improved circuit efficiency & power levels

PCB area and device placement savings

Lower package height (nom. 0.9mm)

Reduced component count



3mm x 2mm (Dual die) MLP

FEATURES

- Low Equivalent On Resistance
- Extremely Low Saturation Voltage (100mV @1A)
- h_{FE} characterised up to 12A
- $I_C= 4.5A$ Continuous Collector Current
- 3mm x 2mm MLP

APPLICATIONS


- DC - DC Converters (FET Drivers)
- Charging circuits
- Power switches
- Motor control

ORDERING INFORMATION


DEVICE	REEL	TAPE WIDTH	QUANTITY PER REEL
ZXTDAM832TA	7"	8mm	3000
ZXTDAM832TC	13"	8mm	10000

DEVICE MARKING

DAA

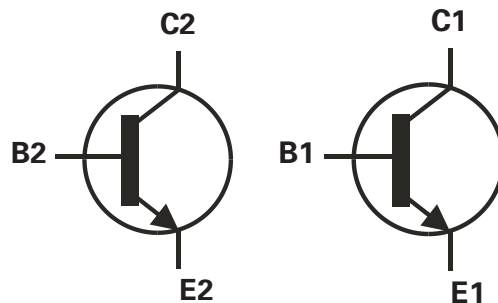

PINOUT



3mm x 2mm MLP
underside view

ZXTDAM832

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	LIMIT	UNIT
Collector-Base Voltage	V_{CBO}	40	V
Collector-Emitter Voltage	V_{CEO}	15	V
Emitter-Base Voltage	V_{EBO}	7.5	V
Peak Pulse Current	I_{CM}	15	A
Continuous Collector Current (a)(f)	I_C	4.5	A
Continuous Collector Current (b)(f)	I_C	5.0	A
Base Current	I_B	1000	mA
Power Dissipation at $T_A=25^{\circ}\text{C}$ (a)(f)	P_D	1.5	W
Linear Derating Factor		12	mW/ $^{\circ}\text{C}$
Power Dissipation at $T_A=25^{\circ}\text{C}$ (b)(f)	P_D	2.45	W
Linear Derating Factor		19.6	mW/ $^{\circ}\text{C}$
Power Dissipation at $T_A=25^{\circ}\text{C}$ (c)(f)	P_D	1	W
Linear Derating Factor		8	mW/ $^{\circ}\text{C}$
Power Dissipation at $T_A=25^{\circ}\text{C}$ (d)(f)	P_D	1.13	W
Linear Derating Factor		9	mW/ $^{\circ}\text{C}$
Power Dissipation at $T_A=25^{\circ}\text{C}$ (d)(g)	P_D	1.7	W
Linear Derating Factor		13.6	mW/ $^{\circ}\text{C}$
Power Dissipation at $T_A=25^{\circ}\text{C}$ (e)(g)	P_D	3	W
Linear Derating Factor		24	mW/ $^{\circ}\text{C}$
Operating and Storage Temperature Range	$T_J; T_{stg}$	-55 to +150	$^{\circ}\text{C}$

THERMAL RESISTANCE

PARAMETER	SYMBOL	VALUE	UNIT
Junction to Ambient (a)(f)	$R_{\theta JA}$	83.3	$^{\circ}\text{C}/\text{W}$
Junction to Ambient (b)(f)	$R_{\theta JA}$	51	$^{\circ}\text{C}/\text{W}$
Junction to Ambient (c)(f)	$R_{\theta JA}$	125	$^{\circ}\text{C}/\text{W}$
Junction to Ambient (d)(f)	$R_{\theta JA}$	111	$^{\circ}\text{C}/\text{W}$
Junction to Ambient (d)(g)	$R_{\theta JA}$	73.5	$^{\circ}\text{C}/\text{W}$
Junction to Ambient (e)(g)	$R_{\theta JA}$	41.7	$^{\circ}\text{C}/\text{W}$

Notes

(a) For a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.

(b) Measured at $t \leq 5$ secs for a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.

(c) For a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with minimal lead connections only**.

(d) For a dual device surface mounted on 10 sq cm single sided 1oz copper on FR4 PCB, in still air conditions **with all exposed pads attached attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.

(e) For a dual device surface mounted on 85 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.

(f) For a dual device with one active die.

(g) For dual device with 2 active die running at equal power.

(h) Repetitive rating - pulse width limited by max junction temperature. Refer to Transient Thermal Impedance graph.


(i) The minimum copper dimensions required for mounting are no smaller than the exposed metal pads on the base of the device as shown in the package dimensions data. The thermal resistance for a dual device mounted on 1.5mm thick FR4 board using minimum copper 1 oz weight, 1mm wide tracks and one half of the device active is $R_{th} = 250^{\circ}\text{C}/\text{W}$ giving a power rating of $P_{tot} = 500\text{mW}$.



ISSUE 1 - JUNE 2002

ZXTDAM832

TYPICAL CHARACTERISTICS

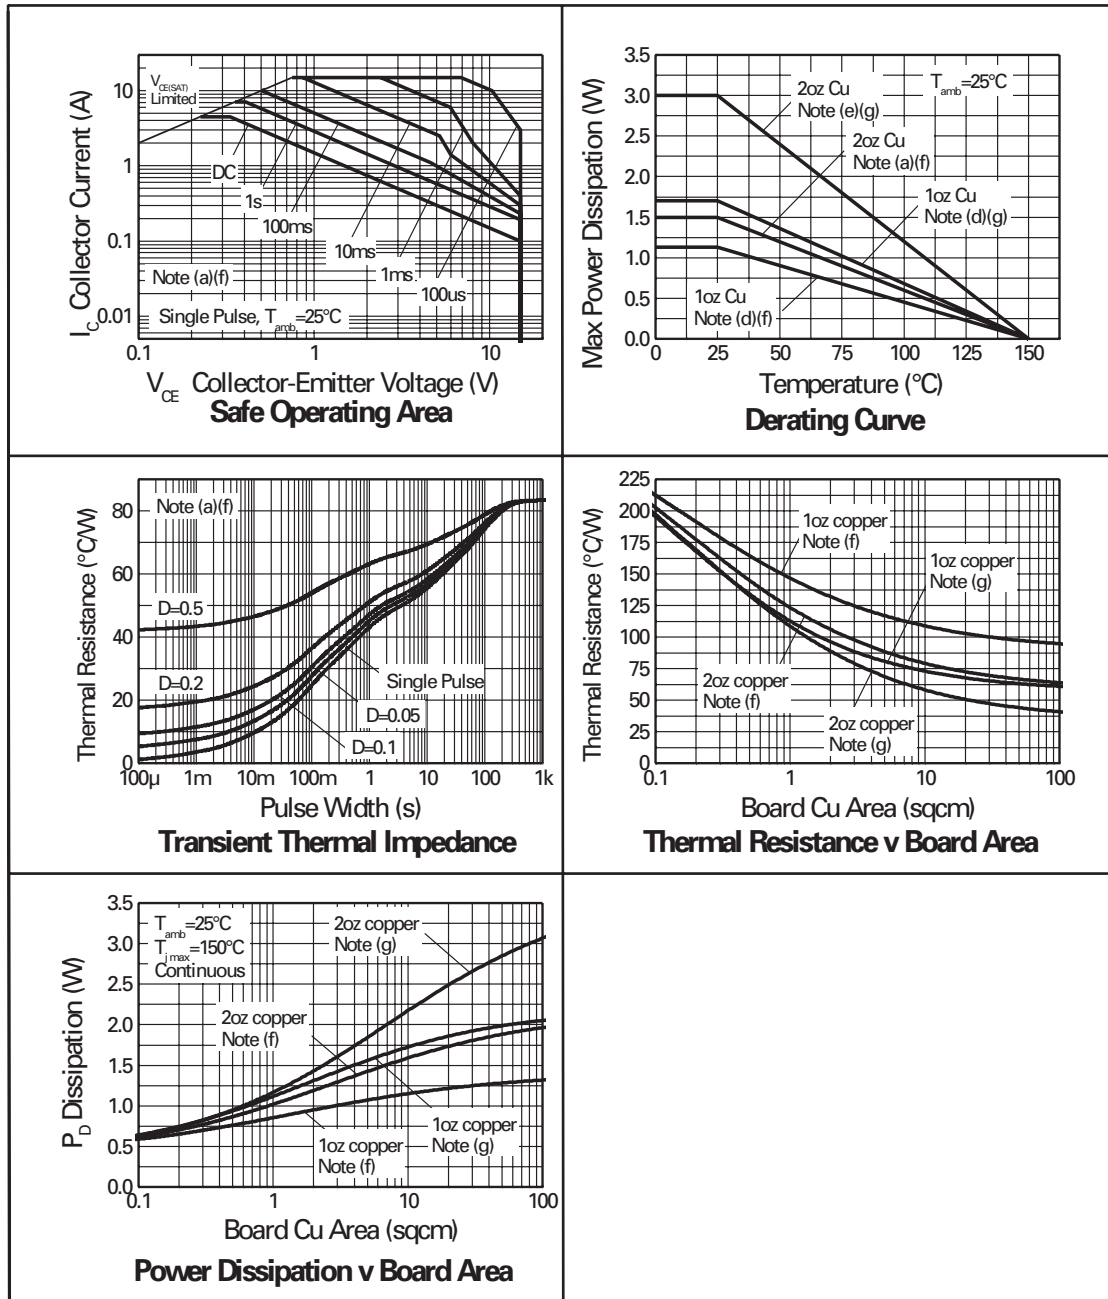

ZXTDAM832


ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	40	70		V	$I_C = 100\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	15	18		V	$I_C = 10\text{mA}^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	7.5	8.2		V	$I_E = 100\mu\text{A}$
Collector Cut-Off Current	I_{CBO}			25	nA	$V_{CB} = 32\text{V}$
Emitter Cut-Off Current	I_{EBO}			25	nA	$V_{EB} = 6\text{V}$
Collector Emitter Cut-Off Current	I_{CES}			25	nA	$V_{CES} = 12\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		8	14	mV	$I_C = 0.1\text{A}, I_B = 10\text{mA}^*$
			70	100	mV	$I_C = 1\text{A}, I_B = 10\text{mA}^*$
			165	200	mV	$I_C = 3\text{A}, I_B = 50\text{mA}^*$
			240	280	mV	$I_C = 4.5\text{A}, I_B = 50\text{mA}^*$
			200		mV	$I_C = 4.5\text{A}, I_B = 100\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		0.94	1.00	V	$I_C = 4.5\text{A}, I_B = 50\text{mA}^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		0.88	0.95	V	$I_C = 4.5\text{A}, V_{CE} = 2\text{V}^*$
Static Forward Current Transfer Ratio	h_{FE}	200	415			$I_C = 10\text{mA}, V_{CE} = 2\text{V}^*$
		300	450			$I_C = 0.2\text{A}, V_{CE} = 2\text{V}^*$
		200	320			$I_C = 3\text{A}, V_{CE} = 2\text{V}^*$
		150	240			$I_C = 5\text{A}, V_{CE} = 2\text{V}^*$
			80			$I_C = 12\text{A}, V_{CE} = 2\text{V}^*$
Transition Frequency	f_T	80	120		MHz	$I_C = 50\text{mA}, V_{CE} = 10\text{V}$ $f = 100\text{MHz}$
Output Capacitance	C_{obo}		30	40	pF	$V_{CB} = 10\text{V}, f = 1\text{MHz}$
Turn-On Time	$t_{(on)}$		120		ns	$V_{CC} = 10\text{V}, I_C = 1\text{A}$
Turn-Off Time	$t_{(off)}$		160		ns	$I_{B1} = I_{B2} = 10\text{mA}$

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$


ZXTDAM832

TYPICAL CHARACTERISTICS

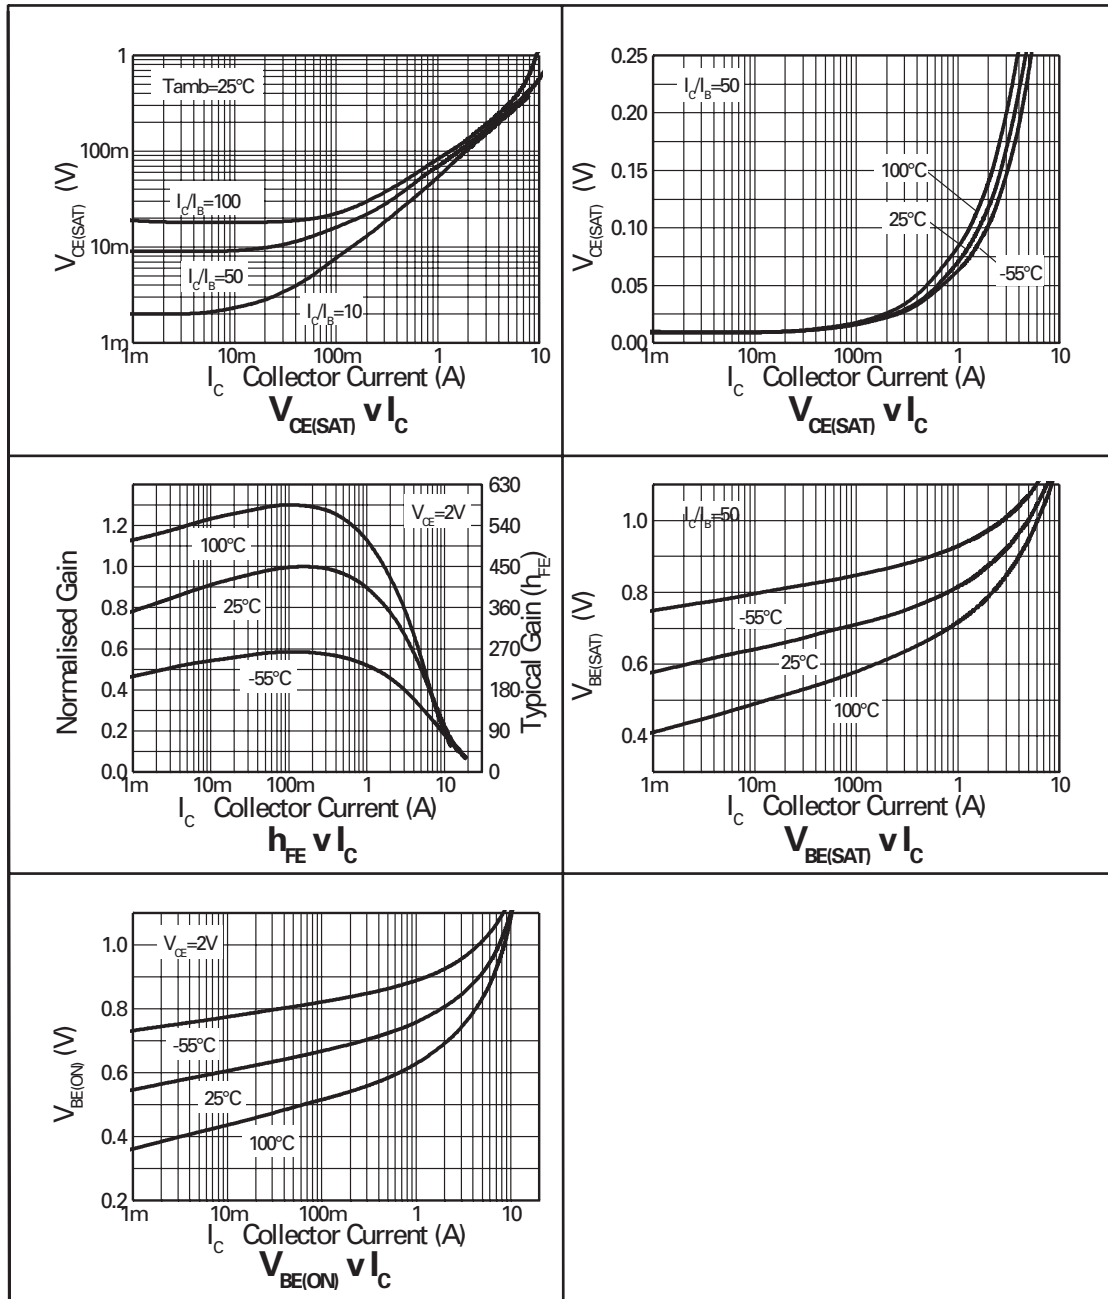

ZXTDAM832

MLP832 PACKAGE OUTLINE (3mm x 2mm Micro Leaded Package)

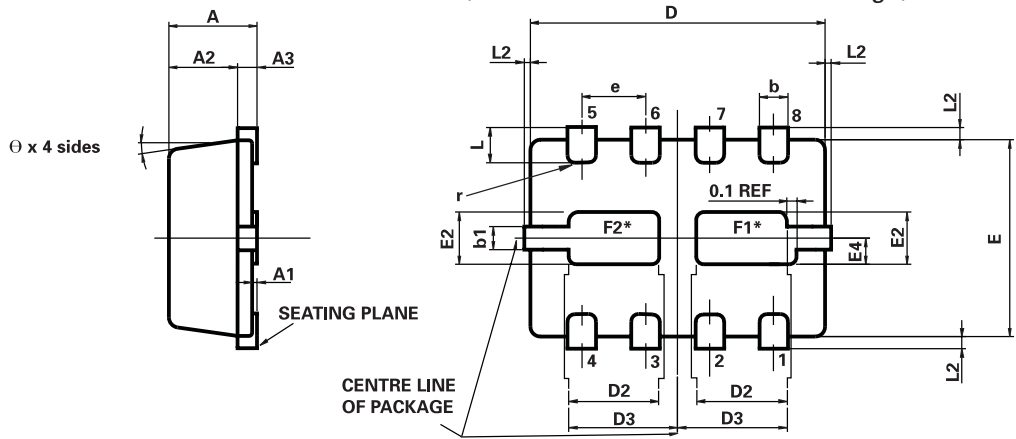

*Exposed Flags. Solder connection to improve thermal dissipation is optional.
F1 at collector 1 potential
F2 at collector 2 potential

CONTROLLING DIMENSIONS IN MILLIMETRES
APPROX. CONVERTED DIMENSIONS IN INCHES

MLP832 PACKAGE DIMENSIONS

DIM	MILLIMETRES		INCHES		DIM	MILLIMETRES		INCHES	
	MIN.	MAX.	MIN.	MAX.		MIN.	MAX.	MIN.	MAX.
A	0.80	1.00	0.031	0.039	e	0.65 REF		0.0256 BSC	
A1	0.00	0.05	0.00	0.002	E	2.00 BSC		0.0787 BSC	
A2	0.65	0.75	0.0255	0.0295	E2	0.43	0.63	0.017	0.0249
A3	0.15	0.25	0.006	0.0098	E4	0.16	0.36	0.006	0.014
b	0.24	0.34	0.009	0.013	L	0.20	0.45	0.0078	0.0157
b1	0.17	0.30	0.0066	0.0118	L2	—	0.125	0.00	0.005
D	3.00 BSC		0.118 BSC		r	0.075 BSC		0.0029 BSC	
D2	0.82	1.02	0.032	0.040	Θ	0°	12°	0°	12°

© Zetex plc 2002

Europe		Americas	Asia Pacific
Zetex plc Fields New Road Chadderton Oldham, OL9 8NP United Kingdom Telephone (44) 161 622 4422 Fax: (44) 161 622 4420 uksales@zetex.com	Zetex GmbH Streitfeldstraße 19 D-81673 München Germany Telefon: (49) 89 45 49 49 0 Fax: (49) 89 45 49 49 49 europe.sales@zetex.com	Zetex Inc 700 Veterans Memorial Hwy Hauppauge, NY11788 USA Telephone: (631) 360 2222 Fax: (631) 360 8222 usa.sales@zetex.com	Zetex (Asia) Ltd 3701-04 Metroplaza, Tower 1 Hing Fong Road Kwai Fong Hong Kong Telephone: (852) 26100 611 Fax: (852) 24250 494 asia.sales@zetex.com

These offices are supported by agents and distributors in major countries world-wide.

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

For the latest product information, log on to www.zetex.com



ISSUE 1 - JUNE 2002