

# AZ2270

## 30 AMP MINIATURE POWER RELAY

### FEATURES

- Quick-connect leads for contacts
- 1 Form A, B and C contacts available
- AC and DC coils available
- High dielectric strength version available
- Epoxy sealed versions available
- UL Class F (155°C) standard
- UL, CUR file E44211



### CONTACTS

Arrangement	SPST (1 Form A, or B) SPDT (1 Form C)
Ratings	Resistive load: Max. switched power: 560 W or 8310 VA Max. switched current: 30 A (Form A) 15 A (Form B) Max. switched voltage: 277 VAC, 28 VDC
UL, CUR	1 Form A 30 A at 277 VAC, General Use, 30k cycles 2 HP at 250 VAC 1 HP at 125 VAC 30 A at 28 VDC 20/60 (FLA/LRA) at 277 VAC 30k cycles  1 Form B 15 A at 277 VAC, General Use 10 A at 28 VDC 0.5 HP at 250 VAC .25 HP at 125 VAC 10 FLA at 277 VAC 30k cycles 33 LRA at 277 VAC 30k cycles  1 Form C 30/20 A (N.O./N.C.) at 277 VAC, General Use 20/10 A (N.O./N.C.) at 28 VDC 2/0.5 HP (N.O./N.C.) at 250 VAC 1/.25 HP (N.O./N.C.) at 125 VAC 20/10 FLA (N.O./N.C.) at 277 VAC 30k cycles 60/33 LRA (N.O./N.C.) at 277 VAC 30k cycles
Material	Silver cadmium oxide
Resistance	< 50 milliohms initially (24 V, 1 A voltage drop method)

### COIL

Power At Pickup Voltage (typical)	DC: 590 mW AC: 1.3 VA
Max. Continuous Dissipation	DC: 1.7 W at 20°C AC: 2.7 VA at 20°C
Max. Temperature	155°C (311°F)

### GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 <sup>7</sup> 1 x 10 <sup>5</sup> at 30 A 120 VAC Res.
Operate Time	15 msec max. at nominal coil voltage
Release Time	10 msec max. at nominal coil voltage (without suppression)
Dielectric Strength (at sea level for 1 min.)	1500 Vrms contact to contact 2500 Vrms contact to coil 4000 Vrms contact to coil ("T" version)
Insulation Resistance	1000 megohms min. at 20°C, 500 VDC 50% RH
Dropout	DC: > 10% of nominal coil voltage AC: > 20% of nominal coil voltage
Ambient Temperature Operating Storage	-55°C (-67°F) to 85°C (185°F) -55°C (-67°F) to 155°C (311°F)
Vibration	0.062" DA at 10–55 Hz
Shock	10 g
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy, P.C., Quick Connects Note: Allow suitable slack on leads when wiring, and do not subject the terminals to excessive force.
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	36 grams

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.



**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

10/6/03W

# AZ2270


## RELAY ORDERING DATA

COIL SPECIFICATIONS – DC Coil					ORDER NUMBER*
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Nominal Current mA $\pm 10\%$	Coil Resistance $\pm 10\%$	
5	3.75	6.4	185	27	AZ2270-1A-5DF
6	4.50	7.8	150	40	AZ2270-1A-6DF
9	6.75	12.2	93	97	AZ2270-1A-9DF
12	9.0	15.4	77	155	AZ2270-1A-12DF
15	11.3	19.8	59	256	AZ2270-1A-15DF
18	13.5	24.1	47	380	AZ2270-1A-18DF
24	18.0	32.0	36	660	AZ2270-1A-24DF
48	36.0	62.6	19	2,560	AZ2270-1A-48DF
70	52.0	93.0	27	5,500	AZ2270-1A-70DF
110	82.5	146.0	20	13,450	AZ2270-1A-110DF

COIL SPECIFICATIONS – AC Coil 50/60 Hz					ORDER NUMBER*
Nominal Coil VAC	Must Operate VAC	Max. Continuous VAC	Nominal Coil Power VA	Coil Resistance $\pm 10\%$	
12	10.2	13.8	2.3	25	AZ2270-1A-12AF
24	20.4	27.6	2.1	100	AZ2270-1A-24AF
120	102.0	138.0	2.3	2,500	AZ2270-1A-120AF
208	166.0	239.0	2.2	11,000	AZ2270-1A-208AF
220/240	187.0	276.0	2.2/2.6	13,490	AZ2270-1A-240AF
277	220.0	318.0	2.2	15,000	AZ2270-1A-277AF

\*Add suffix "E" for epoxy sealed version. Add suffix "T" for 4000 Vrms dielectric. Substitute "1B" or "1C" for 1 form B or 1 form C.

## MECHANICAL DATA

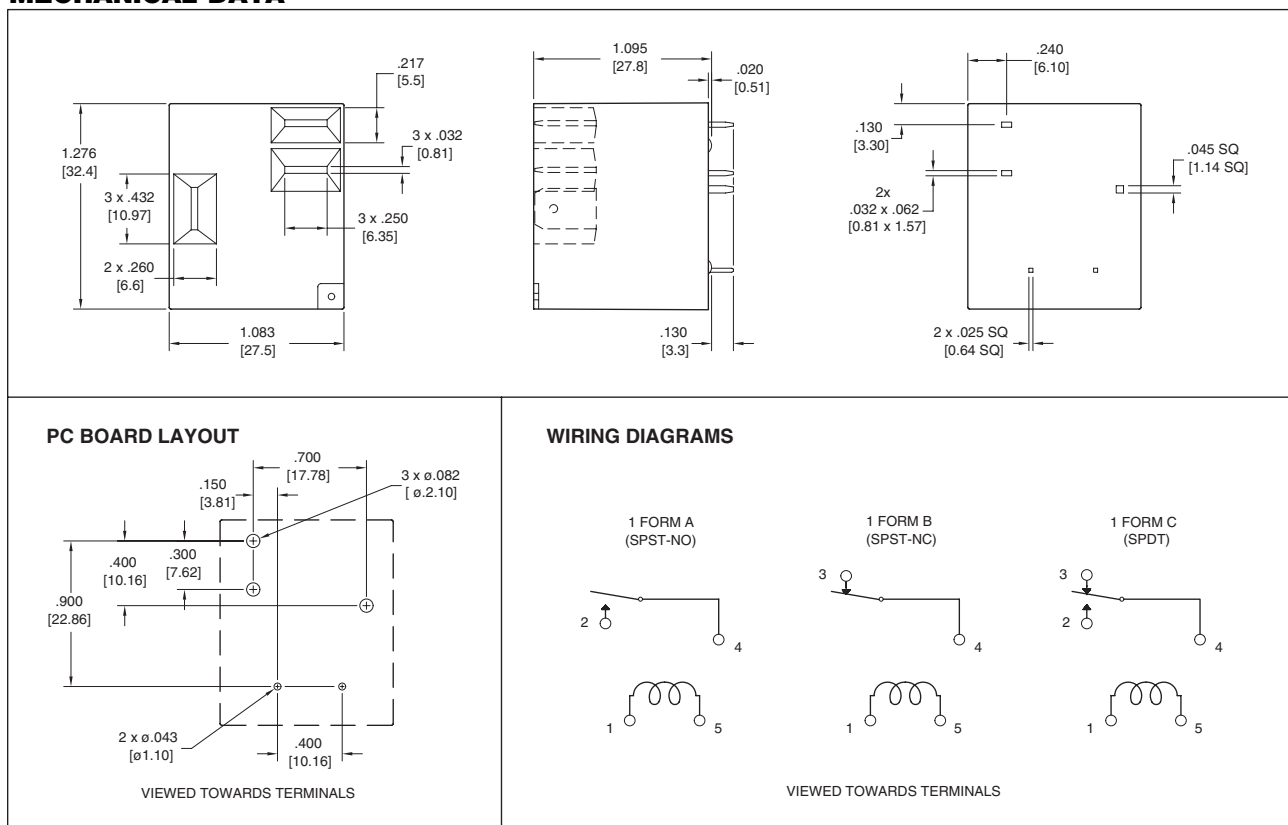

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010$ "



**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

10/6/03W