

2012 Size

1.92/1.98GHz Band
Chip Multilayer Coupler


FSLC-S190E-W

All the technical data and information contained
herein are subject to change without notice.




LC-FSLC-S190E-W-0408A

Equivalent Circuits

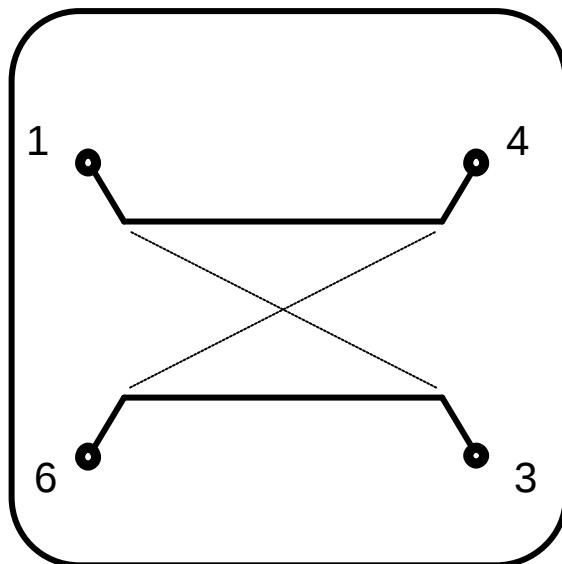

Shape & Size

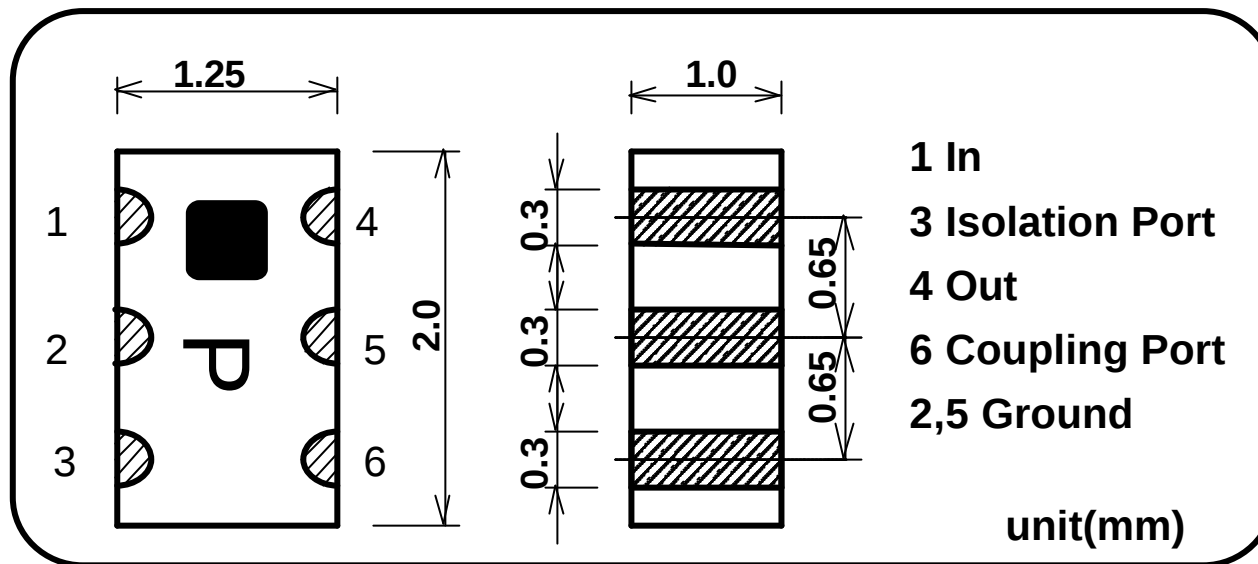

Specifications



P/N: FSLC-S190E-W

Frequency Range(MHz)	Coupling	Insertion Loss	Isolation	Return Loss	Handling Power	Temperature Range
1920-1980	20.5 +/- 1.5dB	0.5dB Max. (0.25dB Typ.)	30dB Typ.	14dB Min. (22dB Typ.)	1W Max. (CW)	-35 to +85 deg.C


All the technical data and information contained herein are subject to change without notice.

LC-FSLC-S190E-W-0408A

FSLC-S190E-W Sample Data

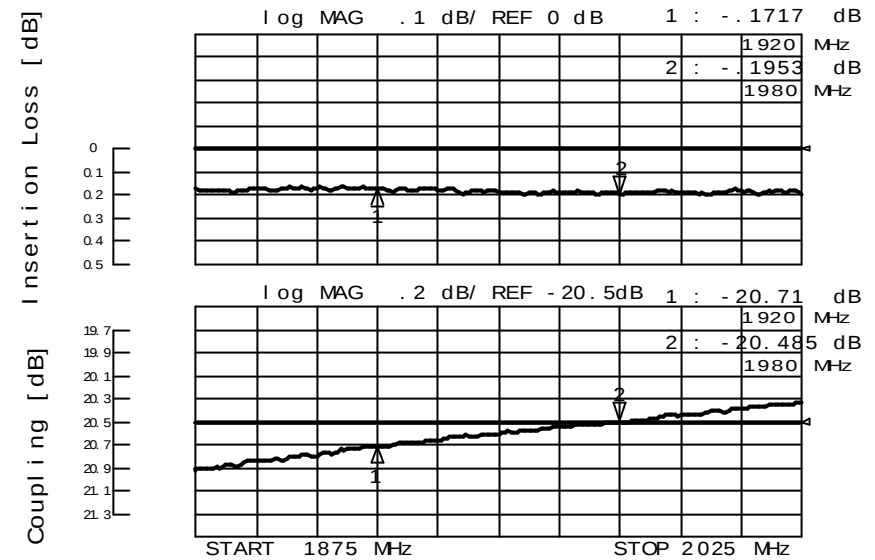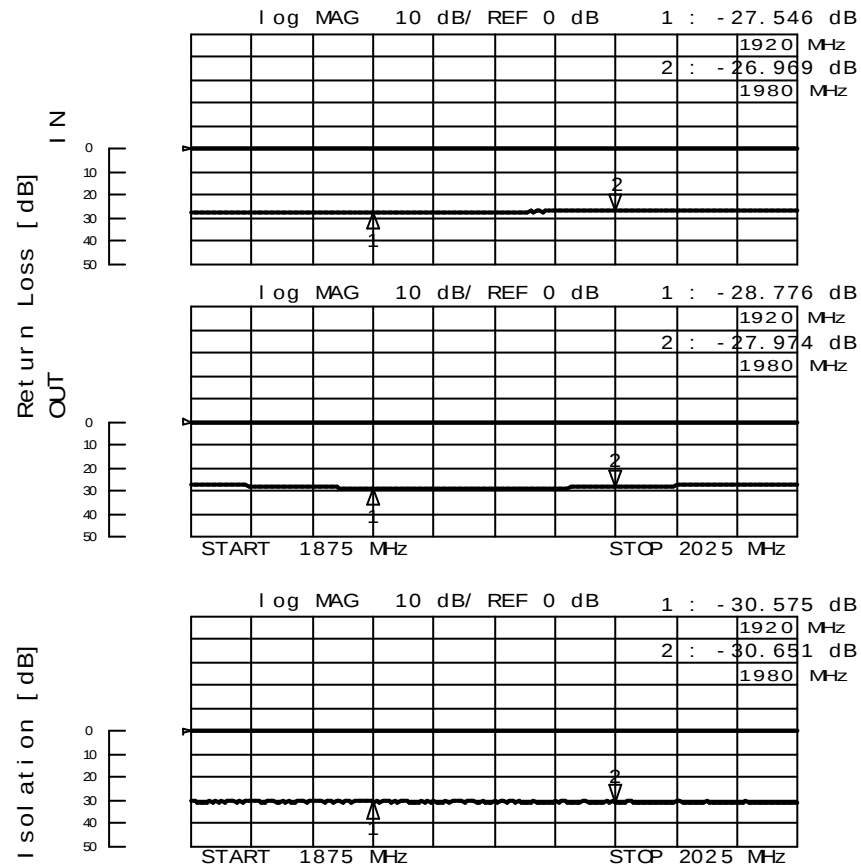


1.92/1.98GHz Band
Chip Multilayer Coupler“FSLC-S190E-W”

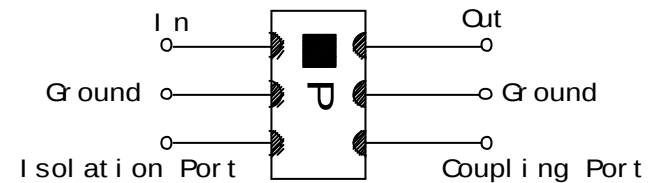

All the technical data and information contained herein are subject to change without notice.

LC-FSLC-S190E-W-0408A

FOOT PATTERN

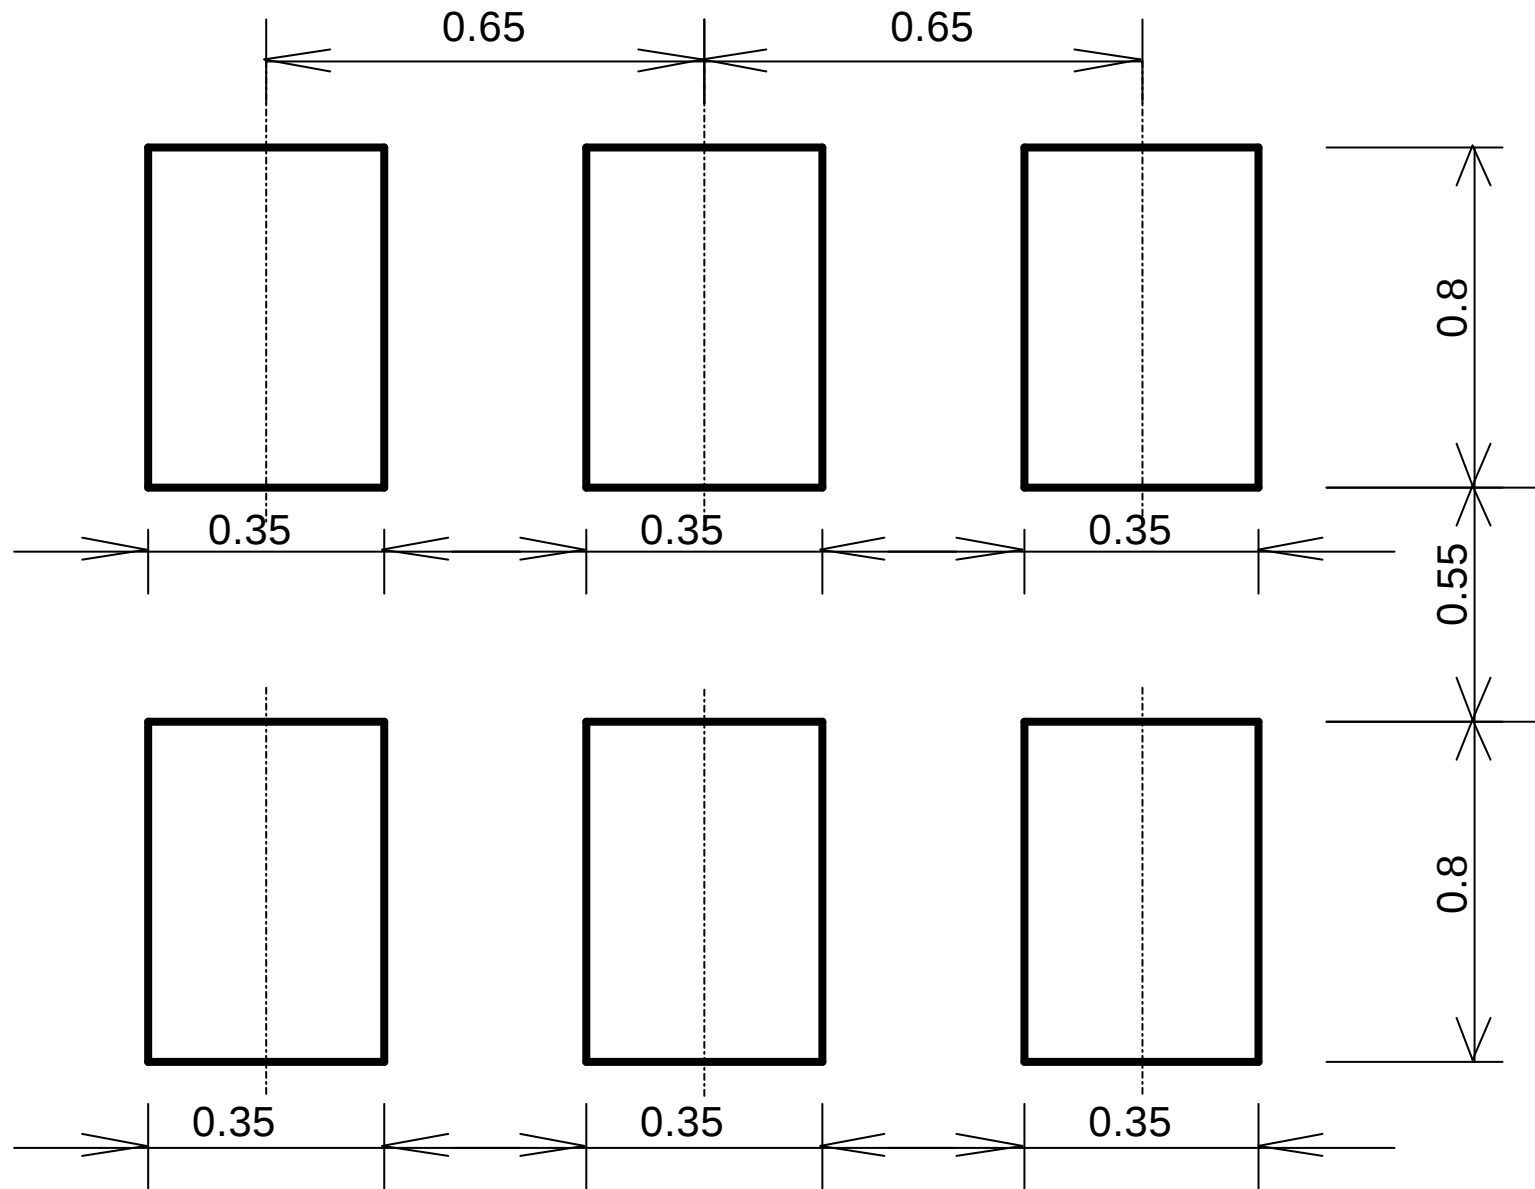

All the technical data and information contained herein are subject to change without notice.

LC-FSLC-S190E-W-0408A