

SPECIAL-SIZE OSCILLATOR SERIES


特殊规格的振荡器

CRB 456F/503F/480E SERIES



- Oscillator CRB456F series for FM stereo
- Oscillator CRB503F series for signal intergration circuit of TV
- Oscillator CRB480E series for D.T.M.F. Oscillating circuit
- 调频立体声用CRB456F系列
- 电视执行信号合成电路用CRB503F系列
- D.T.M.F.振荡电路用CRB480E系列

⊕ DIMENSIONS(Unit:mm) 外形尺寸(单位:毫米)

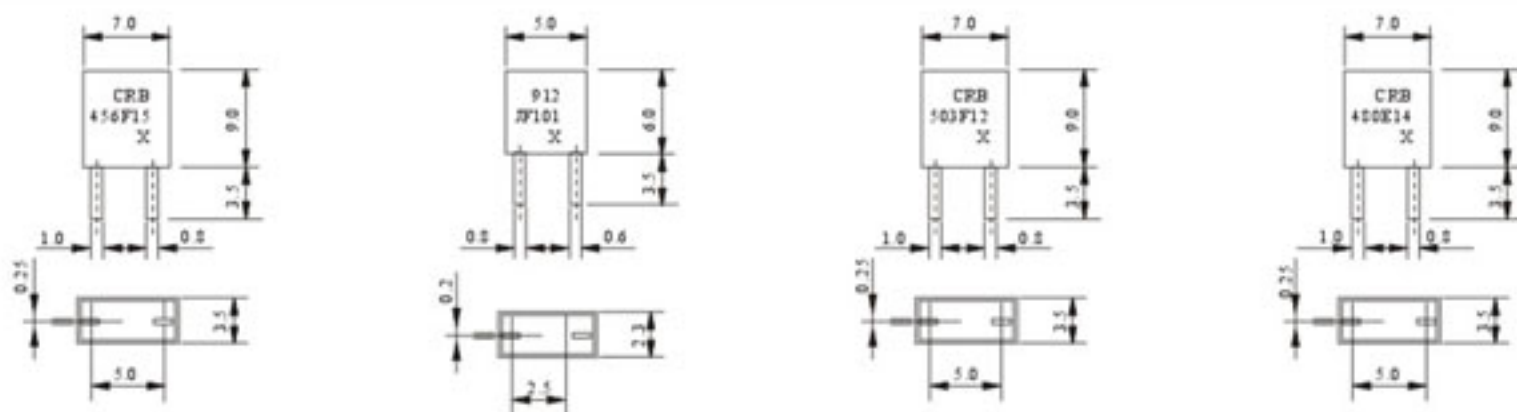

⊕ PRINCIPAL PARAMETERS 主要参数

Model 型号	Freq. Accuracy 频率精度	Applied IC 应用的IC
CRB456F14	19.000KH \pm 38H \pm	TA7413AP(TOSHIBA)
CRB456F15	19.000KH \pm 38H \pm	LA3430(SANYO)
CRB456F16	19.000KH \pm 38H \pm	TA8122AN(TOSHIBA)
CRB456F18	19.000KH \pm 38H \pm	TA8132AN(TOSHIBA)
CRB456F23	456KH \pm 0.25%	LA1886(SANYO)
CRB912JF101	918.5KH \pm 0.3%	AN7291(MATSUSHITA)

Model 型号	Freq. Accuracy 频率精度	Applied IC 应用的IC
CRB480E14	+0.2%,-0.4%	TC31018P(TOSHIBA)

Model 型号	Freq. Accuracy 频率精度	Applied IC 应用的IC
CRB503F2	503.5 \pm 2KHz	μ PC1401C(NEC)
CRB503F5	504.5 \pm 2KHz	LA7620(SANYO)
CRB503F6	519 \pm 2KHz	MS1307(MITSURISHI)
CRB503F10	15.734KHz \pm 0.5%	TA7777P(TOSHIBA)
CRB503F12	503.5 \pm 2KHz	TDA3586N(THOMSON)
CRB503F15	505.1 \pm 2KHz	LA7650(SANYO)
CRB503F30	503.5 \pm 1.5KHz	TA8654AN(TOSHIBA)
CRB503F38	15.734KHz \pm 62KHz	AN5302(MATSUSHITA)
CRB500F2	500.0 \pm 2KHz	μ PC1401C(NEC)
CRB500F9	500.0 \pm 2KHz	M51308SP(MITSUBISHI)
CRB500F13	500.0 \pm 2KHz	M51367SP(MITSUBISHI)
CRB500F25	15.680KHz \pm 0.4%	LA7680(SANYO)
CRB500F40	15.680KHz \pm 0.4%	TA8691N(TOSHIBA)
CRB500F55	15.680KHz \pm 0.4%	LA7685(SANYO)