

## Descriptions

- Switching application
- Interface circuit and driver circuit application

## Features


- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process
- High packing density

## Ordering Information

Type NO.	Marking	Package Code
SRA2219U	CR	SOT-323

## Outline Dimensions


unit : mm

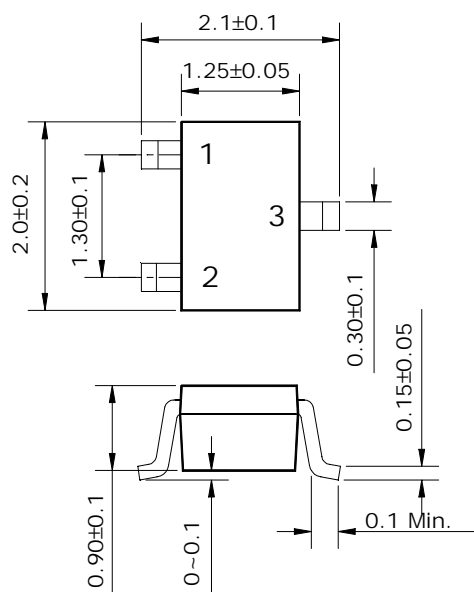

### PIN Connections

1. Base
2. Emitter
3. Collector

### • Equivalent Circuit

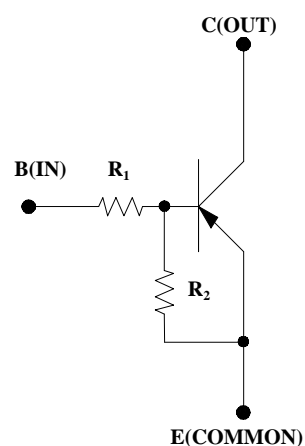

R <sub>1</sub>	R <sub>2</sub>
4.7KΩ	10KΩ

**Absolute maximum ratings****(Ta=25°C)**

Characteristic	Symbol	Ratings	Unit
Out Voltage	$V_O$	-50	V
Input Voltage	$V_I$	-20	V
Out Current	$I_O$	-100	mA
Power Dissipation	$P_D$	200	mW
Junction Temperature	$T_J$	150	°C
Storage Temperature	$T_{STG}$	-55 ~ 150	°C


**Electrical Characteristics****(Ta=25°C)**

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Cut-off Current	$I_{O(OFF)}$	$V_O = -50V, V_I = 0$	-	-	-500	nA
DC Current Gain	$G_I$	$V_O = -5V, I_O = -10mA$	30	-	-	-
Output Voltage	$V_{O(ON)}$	$I_O = -10mA, I_I = -0.5mA$	-	-0.1	-0.3	V
Input Voltage (ON)	$V_{I(ON)}$	$V_O = -0.3V, I_O = -20mA$	-	-1.76	-2.5	V
Input Voltage (OFF)	$V_{I(OFF)}$	$V_O = -5V, I_O = -0.1mA$	-0.3	-0.82	-	V
Transition Frequency	$f_T^*$	$V_O = -10V, I_O = -5mA$	-	250	-	MHz
Input Current	$I_I$	$V_I = -5V$	-	-	-1.8	mA


\* : Characteristic of Transistor Only

## Electrical Characteristic Curves

**Fig. 1  $I_O - V_{I(ON)}$**

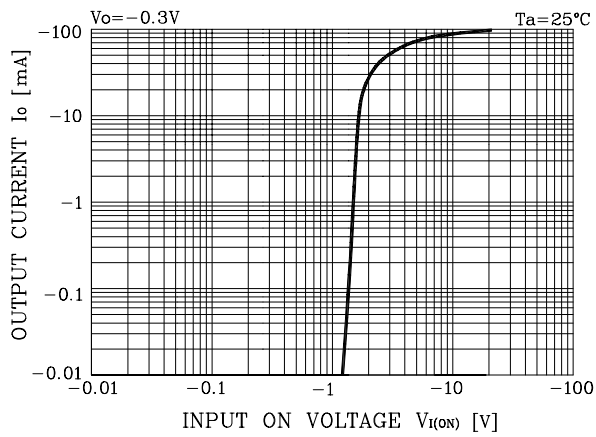

**Fig. 2  $I_O - V_{I(OFF)}$**

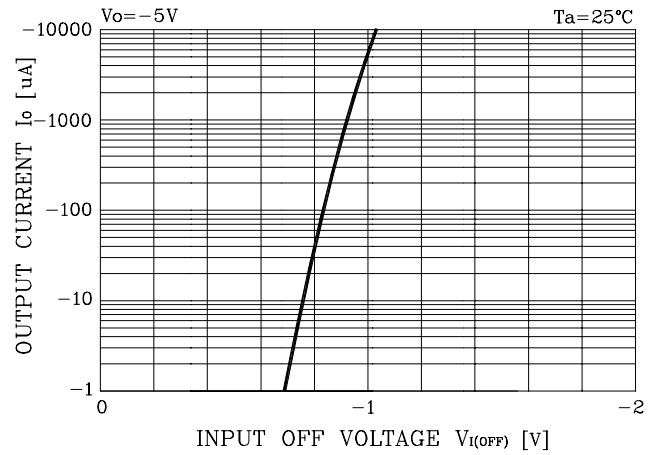

**Fig. 3  $G_I - I_O$**

