


WPN30R

30 Watt Single Output Half Brick DC/DC Converter



- 36 - 75V Input Range
- Industry Standard Pinouts
- Input & Output Filtering
- Extended Temperature Range: -40°C to +100°C Baseplate
- Remote On/Off Function
- Input Reverse Voltage Protection
- Fixed Frequency Operation
- Short Circuit Protection
- UL/CUL 60950, VDE EN60950

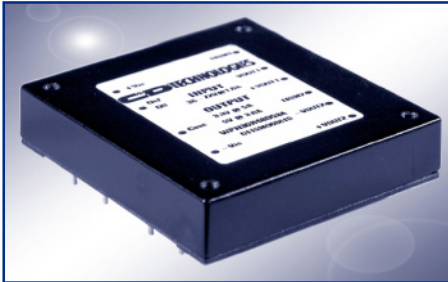

The WPN30R Series is a family of high performance DC/DC converters. The unit is housed in a space-saving shell and combines low cost with high performance across all line and load conditions. An output trim feature is provided, allowing the user to compensate for long line lengths. The WPN30R Series is assembled by a fully automated process using


surface mount components for increased reliability. Through-holes are provided to simplify unit mounting or the addition of a heatsink for high temperature applications. Other features include:

- Full Regulation Down to Zero Load
- Under Voltage Lock-Out, Auto-Start
- Internal Temperature Shutdown, Auto-Reset
- Soft Start
- Remote On/Off (Available in Positive or Negative Logic)
- Remote Sense
- Over Current Protection
- Output Over Voltage Protection
- Output Voltage Adjust

PRODUCT SELECTION CHART

MODEL	NOMINAL INPUT VOLTAGE (Vdc)	RATED OUTPUT VOLTAGE (Vdc)	OUTPUT CURRENT			INPUT CURRENT NOM LOAD (A)	EFFICIENCY (%)
			MIN LOAD(A)	NOM LOAD (A)	MAX LOAD (A)		
WPN30R48S03	48	3.3	0.0	9.0	11.0	0.755	82
WPN30R48S05	48	5.0	0.0	6.0	7.5	0.744	84
WPN30R48S12	48	12	0.0	2.5	3.0	0.718	87
WPN30R48S15	48	15	0.0	2.0	2.4	0.718	87

THERMAL DERATING CURVE

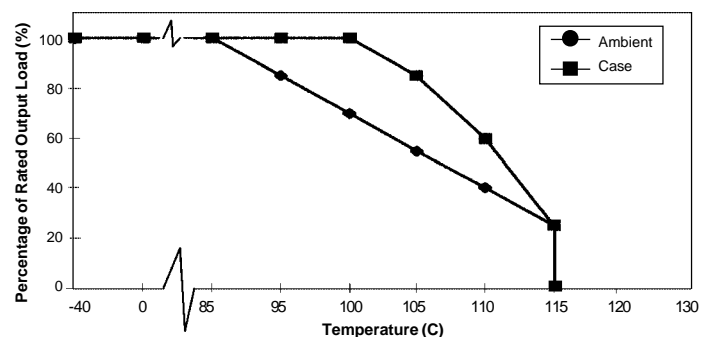








SPECIFICATIONS, ALL MODELS

Specifications are at $T_{CASE} = +40^{\circ}\text{C}$ nominal input voltage unless otherwise specified.


INPUT	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
	INPUT					
	Voltage Range	WPN30R48xyzz	36	48	75	VDC
	Reflected Ripple Current			50	75	mA
	INPUT CONTROL					
	Temperature Shutdown				107	$^{\circ}\text{C}$
	Temperature Hysteresis				5	$^{\circ}\text{C}$
	Quiescent Standby Current	Current into & Vin		8	10	mA
	Under Voltage Shutdown	WPN30R48xyzz		32.5		V
	Under Voltage Hysteresis	WPN30R48xyzz		1		V

GENERAL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
	ISOLATION					
	Rated Voltage		1500			VDC
	Resistance			10		$\text{G}\Omega$
	Capacitance			1000		pF
	Leakage Current	240VAC			100	μAms
	OUTPUT					
	Rated Power				30	W
	Voltage Setpoint Accuracy					
	Single Output				± 1.5	%
	Temperature Coefficient			± 0.2		$\%/^{\circ}\text{C}$
	Line Regulation	High Line to Low Line				
	Single Output				± 0.1	%
	Load Regulation	Min. Load to Nom Load				
	Single Output				± 0.4	%
	Ripple & Noise					
	Single Output	BW = 5Hz to 20 MHz		50	80	mVp-p
	Output Adjust Range	All Outputs		± 9.5		%
	Output Adjust Current	Current Sourced/Sunk by Vadj Pin			± 0.5	mA
	Short Circuit Protection					
	Single Output				7.5	A
	GENERAL					
	Switching Frequency				300	kHz
	MTTF per MIL-HDBK-217	Circuit Stress Method				
	Ground Benign	$T_A = +25^{\circ}\text{C}$, Unmodified Database			1,500,000	Hr
	Package Weight			90		g
	TEMPERATURE					
	Operation/Specification	Case Temperature	-40		+100	$^{\circ}\text{C}$
	Storage	Case Temperature	-55		+110	$^{\circ}\text{C}$
	Shutdown Temperature	Case Temperature	+105		+107	$^{\circ}\text{C}$
	Thermal Impedance, Case-Ambient				7	$^{\circ}\text{C/W}$

PERFORMANCE GRAPHS

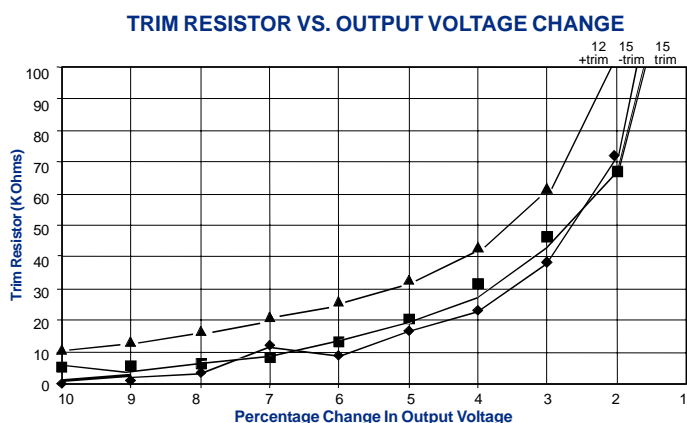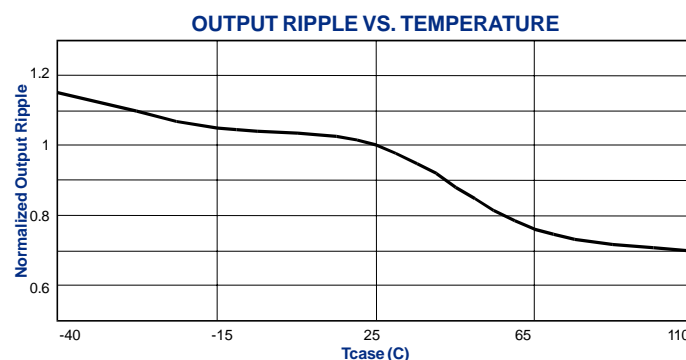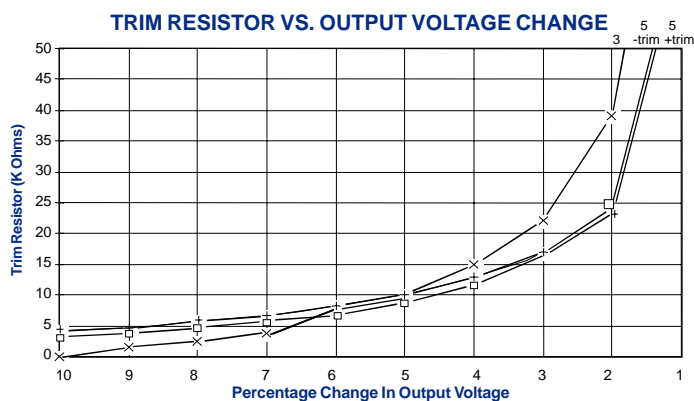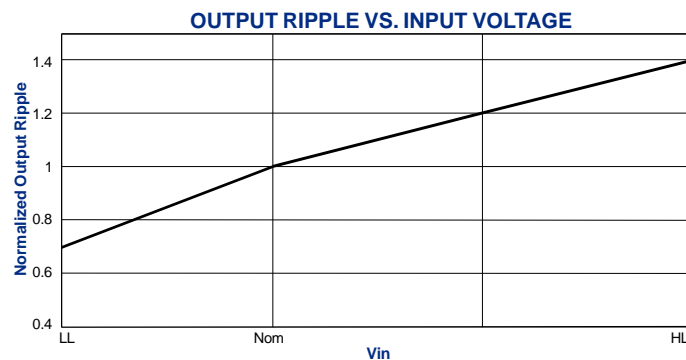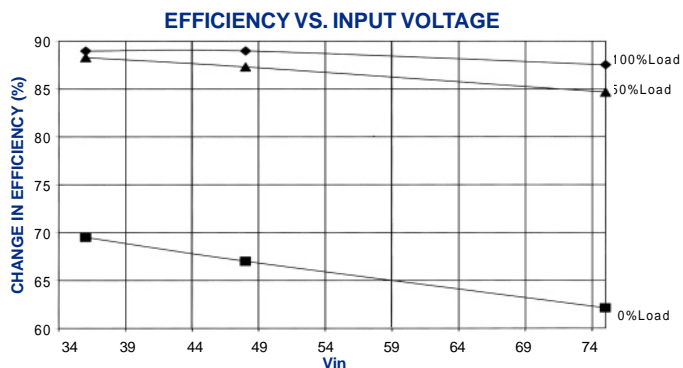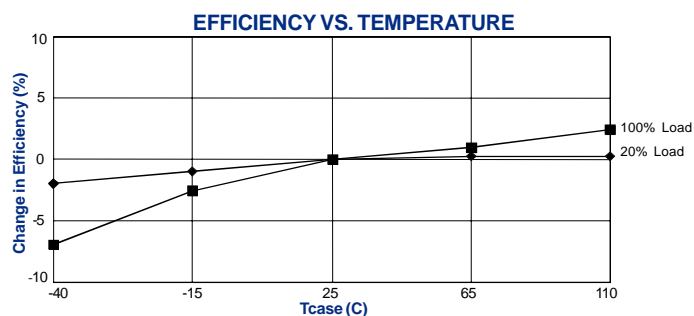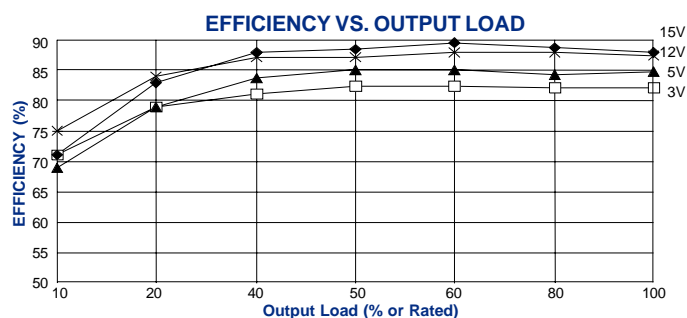

HYSTERESIS GRAPH

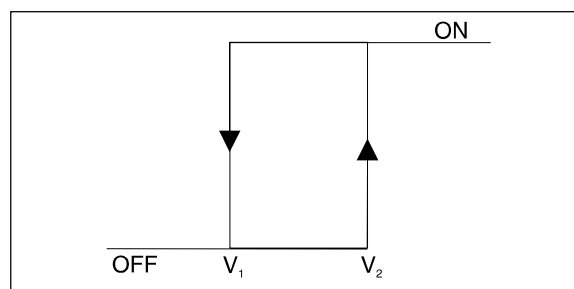


Undervoltage Lockout Threshold Voltages

Nominal Input Voltage Range	Shutdown Low Voltage (V1) OFF	Shutdown High Voltage (V2) ON
48	32.5	33.5

Specifications typical at TA=25°C, rated output current.

MECHANICAL

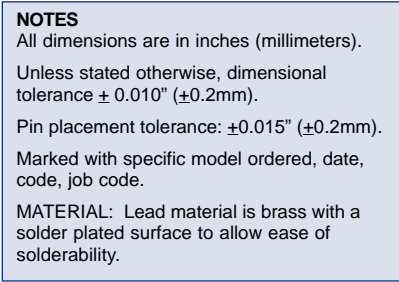

ORDERING INFORMATION

Device Family WPN30R xyyz -

Indicated 30 Watt Regulated DC/DC Converter

Model Number _____

Selected from Table of Electrical Characteristics

Where:

- xx = Input Voltage
- y = Number of Outputs (Single "S")
- zz = Output Voltage

Remote On/Off Logic _____

- Positive Logic - No Number
- Negative Logic - 1

Any data, prices, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application. C&D Technologies, Inc. does not warrant or recommend that any of its products be used in any life support or aviation or aerospace applications.