


CQ220-8B
CQ220-8D
CQ220-8M
CQ220-8N

8.0 AMP TRIAC
200 THRU 800 VOLTS



TO-220 CASE

CentralTM Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CQ220-8B series type is an Epoxy Molded Silicon Triac designed for full wave AC control applications featuring gate triggering in all four (4) quadrants.

MARKING CODE: FULL PART NUMBER

MAXIMUM RATINGS: ($T_C=25^{\circ}\text{C}$ unless otherwise noted)


	SYMBOL	CQ220 -8B	CQ220 -8D	CQ220 -8M	CQ220 -8N	UNITS
Peak Repetitive Off-State Voltage	V_{DRM}	200	400	600	800	V
RMS On-State Current ($T_C=90^{\circ}\text{C}$)	$I_{\text{T(RMS)}}$		8.0			A
Peak One Cycle Surge ($t=8.3\text{ms}$)	I_{TSM}		50			A
I^2t Value for Fusing ($t=8.3\text{ms}$)	I^2t		10			A^2s
Peak Gate Power ($t_p=10\mu\text{s}$)	P_{GM}		40			W
Average Gate Power Dissipation	$P_{\text{G (AV)}}$		1.0			W
Peak Gate Current ($t_p=10\mu\text{s}$)	I_{GM}		4.0			A
Peak Gate Voltage ($t_p=10\mu\text{s}$)	V_{GM}		16			V
Critical Rate of Rise of On-State Current						
Repetitive ($f=60\text{Hz}$)	di/dt		10			$\text{A}/\mu\text{s}$
Storage Temperature	T_{stg}		-40 to +150			$^{\circ}\text{C}$
Junction Temperature	T_{J}		-40 to +125			$^{\circ}\text{C}$
Thermal Resistance	θ_{JA}		60			$^{\circ}\text{C}/\text{W}$
Thermal Resistance	θ_{JC}		3.2			$^{\circ}\text{C}/\text{W}$

ELECTRICAL CHARACTERISTICS: ($T_C=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{DRM}	Rated V_{DRM}			10	μA
I_{DRM}	Rated V_{DRM} , $T_C=125^{\circ}\text{C}$			500	μA
I_{GT}	$V_{\text{D}}=12\text{V}$, $R_{\text{L}}=10\Omega$, QUAD I, II, III		4.5	20	mA
I_{GT}	$V_{\text{D}}=12\text{V}$, $R_{\text{L}}=10\Omega$, QUAD IV		17	50	mA
I_{H}	$I_{\text{T}}=100\text{mA}$		4.7	25	mA
V_{GT}	$V_{\text{D}}=12\text{V}$, $R_{\text{L}}=10\Omega$, QUAD I, II, III		0.95	1.50	V
V_{GT}	$V_{\text{D}}=12\text{V}$, $R_{\text{L}}=10\Omega$, QUAD IV		1.35	2.50	V
V_{TM}	$I_{\text{TM}}=11\text{A}$, $t_p=380\mu\text{s}$		1.30	1.75	V
dv/dt	$V_{\text{D}}=2/3 V_{\text{DRM}}$, $R_{\text{GK}}=\infty$, $T_C=125^{\circ}\text{C}$	5.0			$\text{V}/\mu\text{s}$

R2 (24-September 2004)

TO-220 CASE - MECHANICAL OUTLINE

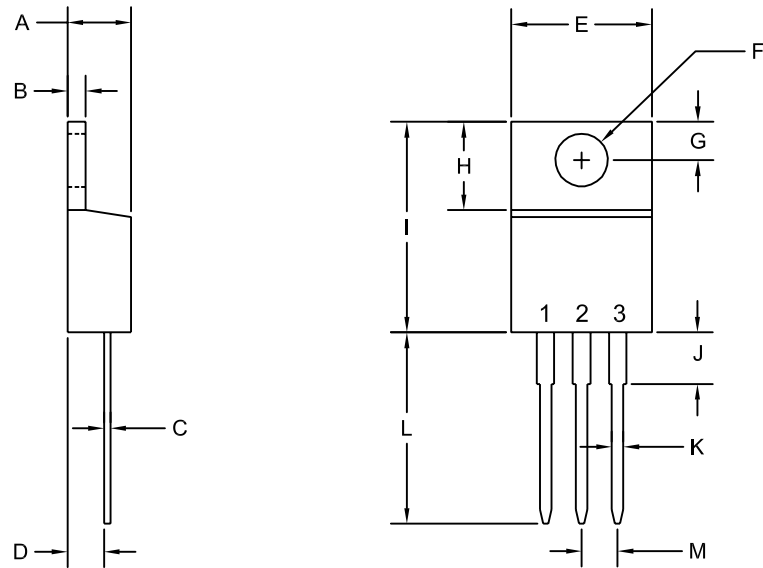

R2

LEAD CODE:

- 1) MT1
- 2) MT2
- 3) GATE

NOTE: TAB IS COMMON
TO PIN 2 (MT2)

MARKING CODE:

FULL PART NUMBER

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.170	0.190	4.31	4.82
B	0.045	0.055	1.15	1.39
C	0.013	0.026	0.33	0.65
D	0.083	0.107	2.10	2.72
E	0.394	0.417	10.01	10.60
F (DIA)	0.140	0.157	3.55	4.00
G	0.100	0.118	2.54	3.00
H	0.230	0.270	5.85	6.85
I	0.560	0.625	14.23	15.87
J	-	0.250	-	6.35
K	0.025	0.038	0.64	0.96
L	0.500	0.579	12.70	14.70
M	0.090	0.110	2.29	2.79

TO-220 (REV: R2)

R2 (24-September 2004)