



**DC COMPONENTS CO., LTD.**

RECTIFIER SPECIALISTS

**RC201  
THRU  
RC207**

**TECHNICAL SPECIFICATIONS OF SINGLE-PHASE SILICON BRIDGE RECTIFIER**

**VOLTAGE RANGE - 50 to 1000 Volts**

**CURRENT - 2.0 Amperes**

**FEATURES**

- \* Surge overload ratings to 50 Amperes peak
- \* Ideal for printed circuit board assembly

**MECHANICAL DATA**


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: MIL-STD-202E, Method 208 guaranteed
- \* Polarity: As marked
- \* Mounting position: Any
- \* Weight: 1.88 grams

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.



**RC-2**

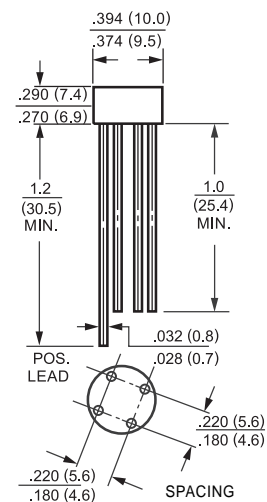

		SYMBOL	RC201	RC202	RC203	RC204	RC205	RC206	RC207	UNITS
Maximum Recurrent Peak Reverse Voltage		V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS Bridge Input Voltage		V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Output Current at T <sub>A</sub> = 25°C		I <sub>O</sub>	2.0							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)		I <sub>FSM</sub>	50							Amps
Maximum Forward Voltage Drop per element at 1.0A DC		V <sub>F</sub>	1.1							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage per element	@ T <sub>A</sub> = 25°C	I <sub>R</sub>	10							uAmps
	@ T <sub>A</sub> = 100°C		500							
I <sup>2</sup> t Rating for Fusing (t<8.3ms)		I <sup>2</sup> t	10							A <sup>2</sup> Sec
Typical Junction Capacitance ( Note1)		C <sub>J</sub>	25							pF
Typical Thermal Resistance (Note 2)		RθJA	40							°C/W
Operating Temperature Range		T <sub>J</sub>	-55 to + 125							°C
Storage Temperature Range		T <sub>STG</sub>	-55 to + 150							°C

NOTES : 1. Measured at 1 MHz and applied reverse voltage of 4.0 volts

2. Thermal Resistance from Junction to Ambient and from junction to lead mounted on P.C.B. with 0.47 x 0.47" (12x12mm) copper pads.

RATING AND CHARACTERISTIC CURVES (RC201 THRU RC207)

FIG. 1 - MAXIMUM FORWARD SURGE CURRENT

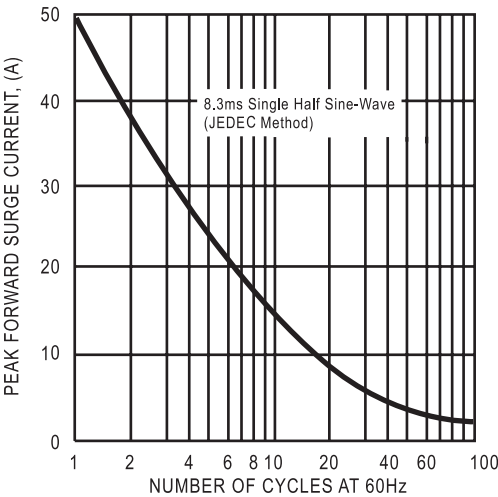


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

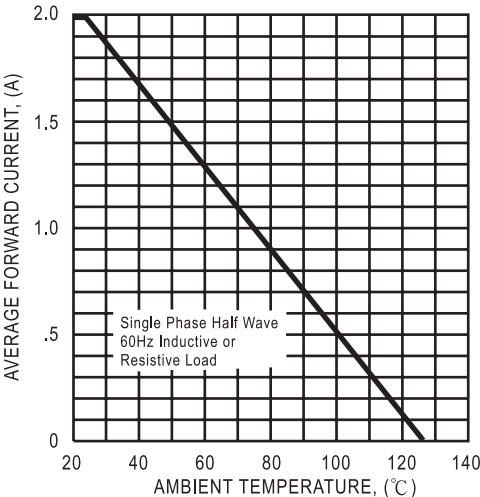


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS


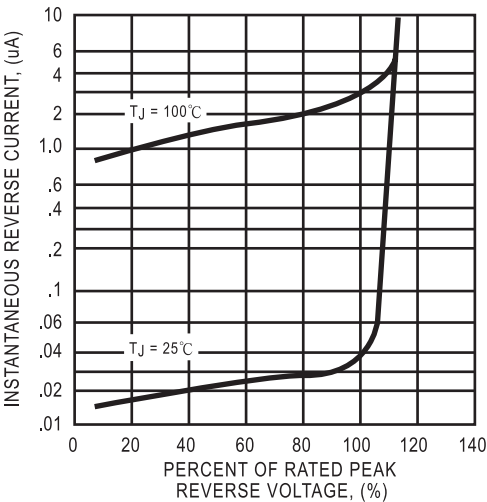


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

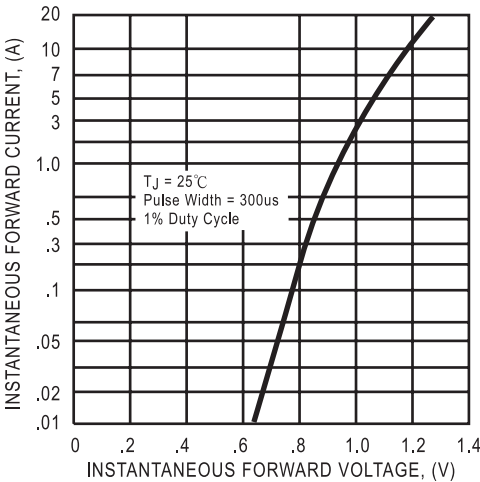

DC COMPONENTS CO., LTD.