

KBL400 - KBL410

PRV : 50 - 1000 Volts

Io : 4.0 Amperes


FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Ideal for printed circuit board

MECHANICAL DATA :

- * Case : Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Terminals : Plated lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Polarity symbols marked on case
- * Mounting position : Any
- * Weight : 5.15 grams

SILICON BRIDGE RECTIFIERS

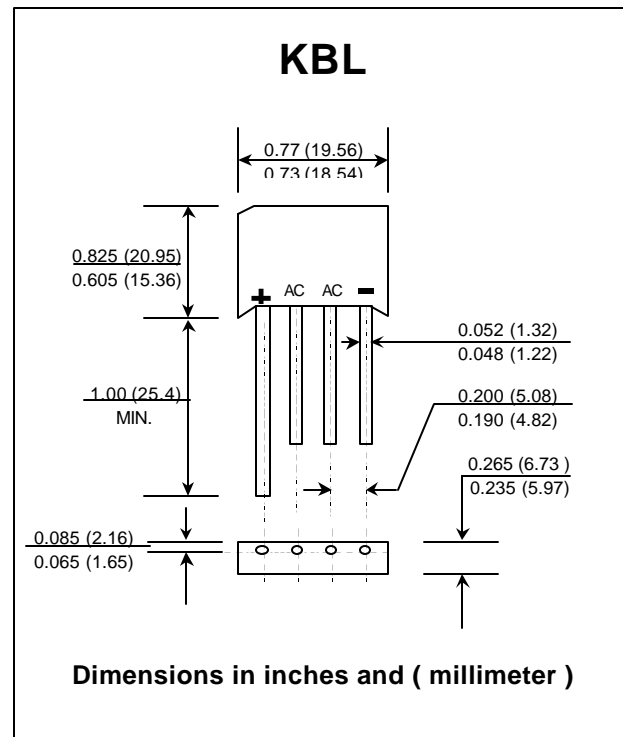

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

| RATING | SYMBOL | KBL 400 | KBL 401 | KBL 402 | KBL 404 | KBL 406 | KBL 408 | KBL 410 | UNIT |
|--|--------------------|---------------|---------|---------|---------|---------|---------|---------|------------------|
| Maximum Recurrent Peak Reverse Voltage | V _{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | Volts |
| Maximum RMS Voltage | V _{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | Volts |
| Maximum DC Blocking Voltage | V _{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | Volts |
| Maximum Average Forward Current T _c =50°C | I _{F(AV)} | 4.0 | | | | | | | Amps. |
| Peak Forward Surge Current Single half sine wave Superimposed on rated load (JEDEC Method) | I _{FSM} | 200 | | | | | | | Amps. |
| Rating for fusing (t < 8.3 ms.) | I ² t | 166 | | | | | | | A ² S |
| Maximum Forward Voltage per Diode at I _F = 4 Amps. | V _F | 1.1 | | | | | | | Volts |
| Maximum DC Reverse Current Ta = 25 °C | I _R | 10 | | | | | | | μA |
| at Rated DC Blocking Voltage Ta = 100 °C | I _{R(H)} | 1.0 | | | | | | | mA |
| Typical Thermal Resistance (Note 1) | R _{θJA} | 10 | | | | | | | °C/W |
| Operating Junction Temperature Range | T _J | - 50 to + 150 | | | | | | | °C |
| Storage Temperature Range | T _{STG} | - 50 to + 150 | | | | | | | °C |

Notes :

- 1) Thermal resistance from Junction to Ambient with units mounted on a 3" X 3" X 0.11" THK (7.5cm X 7.5cm X 0.3cm) Cu. plate.

UPDATE : APRIL 23,1998

RATING AND CHARACTERISTIC CURVES (KBL400 - KBL410)

FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

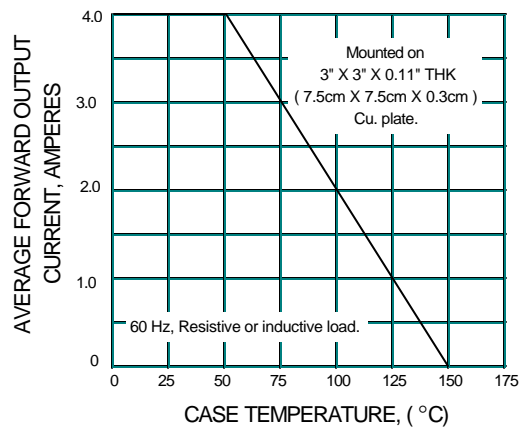


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

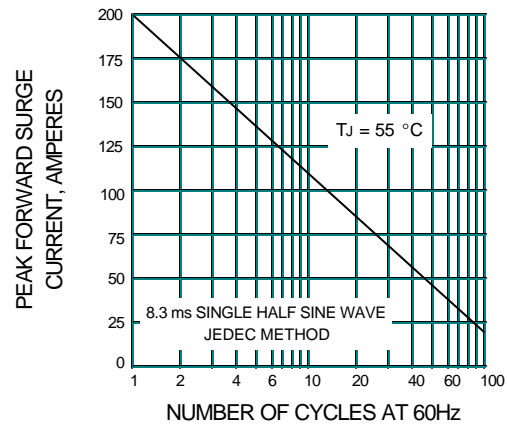


FIG.3 - TYPICAL FORWARD CHARACTERISTICS PER DIODE

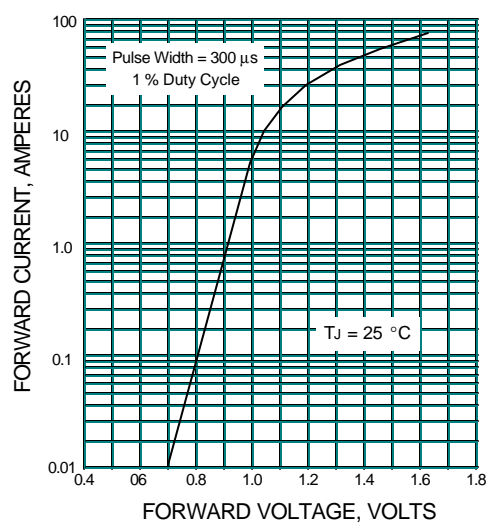


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

