


International IOR Rectifier

MBRA120

SCHOTTKY RECTIFIER

1.0 Amp




Major Ratings and Characteristics

Characteristics	MBRA120	Units
I_{FAV} Rect. Waveform	1.0	A
V_{RRM}	20	V
I_{FSM} @ $t_p = 5 \mu s$ sine	310	A
V_F @ 1.0A pk, $T_J = 125^\circ C$	0.34	V
T_J range	- 65 to 150	$^\circ C$

Description/ Features

The MBRA120 surface mount Schottky rectifier has been designed for applications requiring low forward drop and very small foot prints on PC boards. Typical applications are in disk drives, switching power supplies, converters, free-wheeling diodes, battery charging, and reverse battery protection.

- Small foot print, surface mountable
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

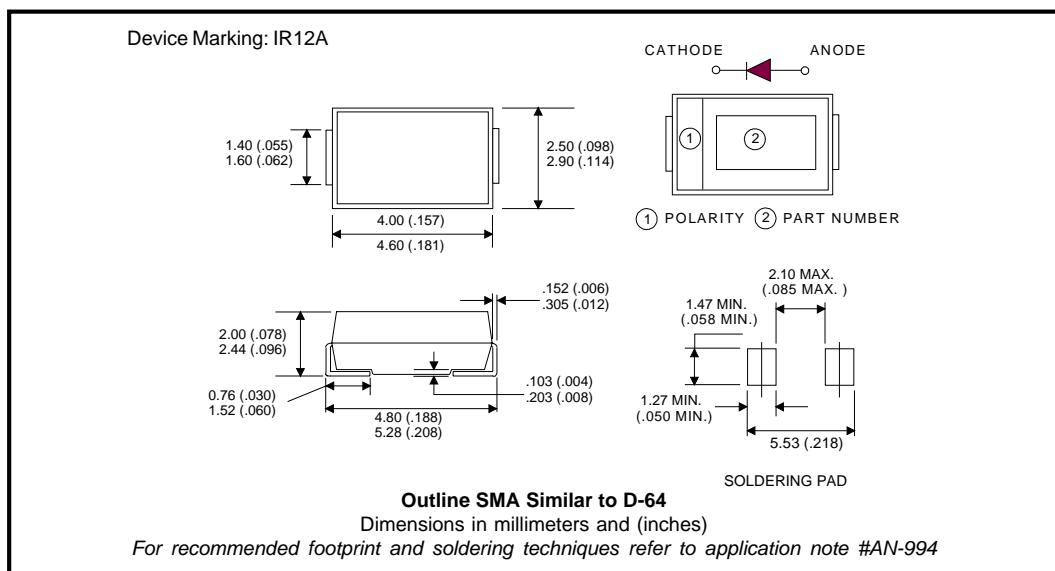

MBRA120

Bulletin PD-20643 rev. D 03/03

International
IR Rectifier

Voltage Ratings

Part number	MBRA120
V_R Max. DC Reverse Voltage (V)	20
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	Value	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current	1.0	A	50% duty cycle @ $T_L = 136^\circ\text{C}$, rectangular wave form
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current	310		5 μs Sine or 3 μs Rect. pulse
	40		10ms Sine or 6ms Rect. pulse
E_{AS} Non Repetitive Avalanche Energy	2.0	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 1\text{A}$, $L = 4\text{mH}$
I_{AR} Repetitive Avalanche Current	1.0	A	

Electrical Specifications

Parameters	Typ.	Max.	Units	Conditions
V_{FM} Max. Forward Voltage Drop (1)	0.42	0.45	V	@ 1A
	0.46	0.52	V	@ 2A
	0.33	0.37	V	@ 1A
	0.39	0.45	V	@ 2A
	0.30	0.35	V	@ 1A
	0.36	0.43	V	@ 2A
I_{RM} Max. Reverse Leakage Current (1)	0.015	0.2	mA	$T_J = 25^\circ\text{C}$
	2.0	6.0	mA	$T_J = 100^\circ\text{C}$
	7.0	20	mA	$T_J = 125^\circ\text{C}$
C_T Typical Junction Capacitance	110	-	pF	$V_R = 5V_{DC}$ (test signal range 100kHz to 1Mhz), @ 25°C
L_S Typical Series Inductance	2.0	-	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change	-	10000	V/ μs	(Rated V_R)

(1) Pulse Width < 300 μs , Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	Value	Units	Conditions
T_J Max. Junction Temperature Range(*)	-65 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-65 to 150	$^\circ\text{C}$	
R_{thJL} Max. Thermal Resistance Junction to Lead (**)	35	$^\circ\text{C}/\text{W}$	DC operation
R_{thJA} Max. Thermal Resistance Junction to Ambient	80	$^\circ\text{C}/\text{W}$	
Wt Approximate Weight	0.07(0.002)	gr (oz)	
Case Style	SMA		Similar D-64
Device Marking	IR12A		

(*) $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{th(j-a)}}$ thermal runaway condition for a diode on its own heatsink

(**) Mounted 1 inch square PCB

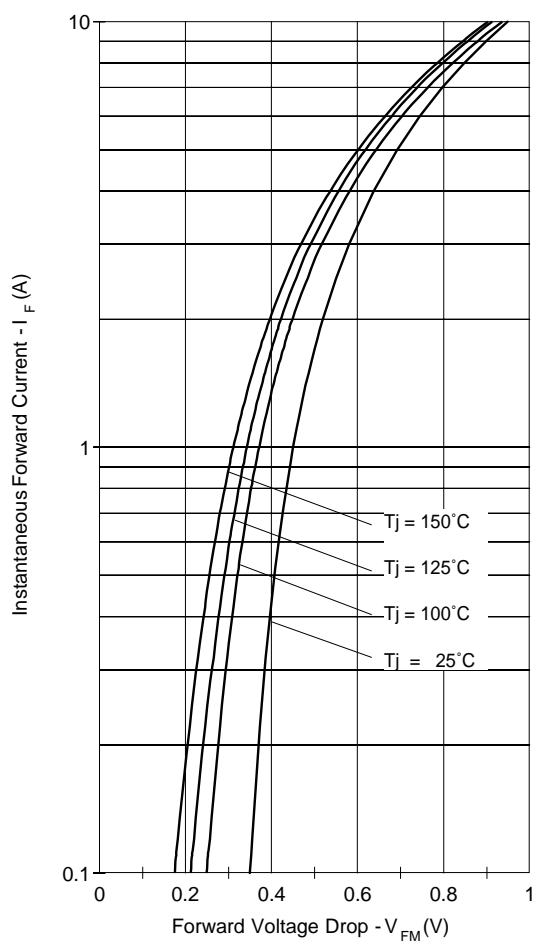


Fig. 1 - Maximum Forward Voltage Drop Characteristics

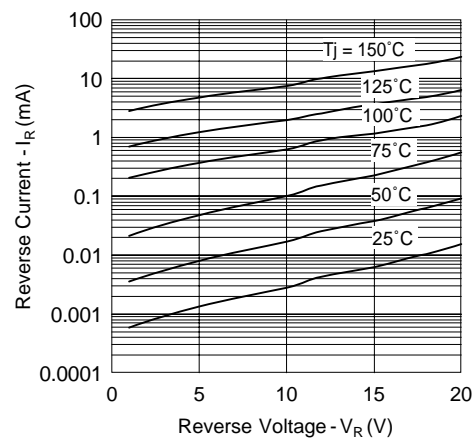


Fig. 2 - Typical Peak Reverse Current Vs. Reverse Voltage

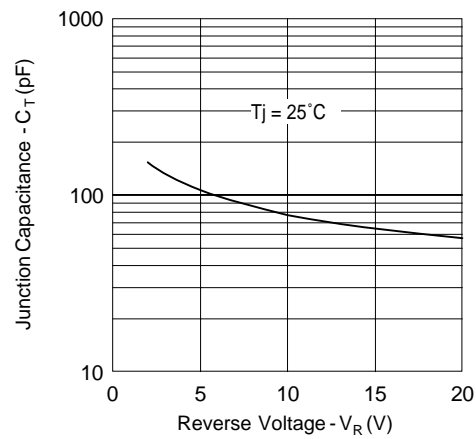


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

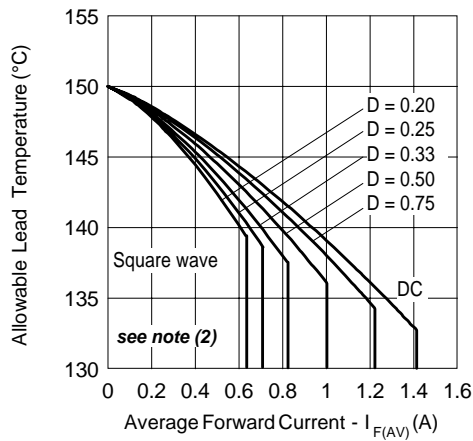


Fig. 4 - Maximum Average Forward Current
Vs. Allowable Lead Temperature

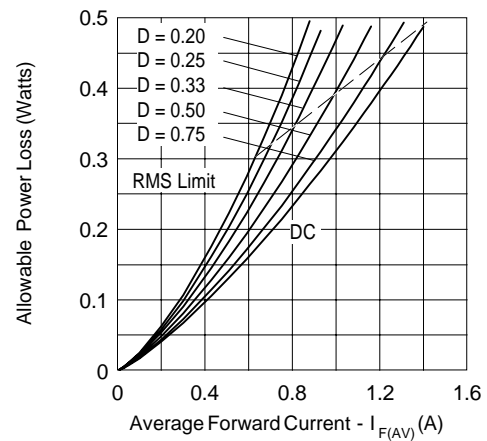


Fig. 5 - Maximum Average Forward Dissipation
Vs. Average Forward Current

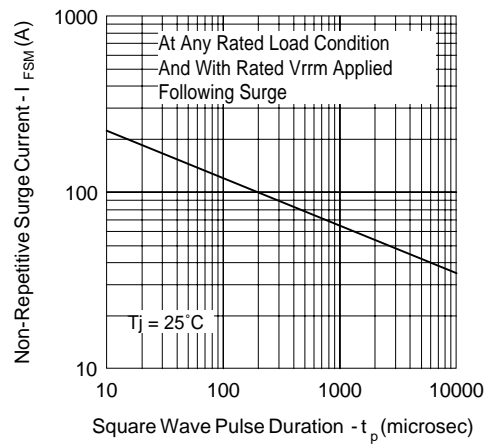



Fig. 6 - Maximum Peak Surge Forward Current Vs. Pulse Duration

(2) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;

P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)}/D)$ (see Fig. 6);


$P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$

Tape & Reel Information

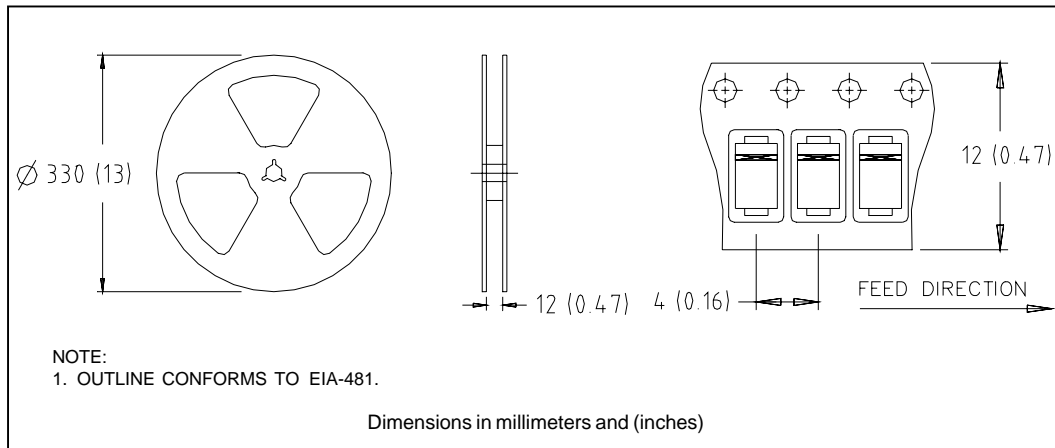

Marking & Identification

Each device has 2 rows for identification. The first row designates the device as manufactured by International Rectifier as indicated by the letters "IR", and the Part Number (indicates the current and the voltage rating). The second row indicates the year, the week of manufacturing and the Site ID.

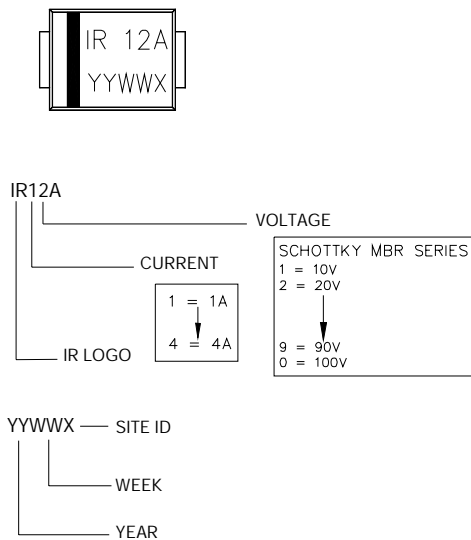

Ordering Information

MBRA120TR - TAPE AND REEL

WHEN ORDERING, INDICATE THE PART NUMBER AND THE QUANTITY (IN MULTIPLES OF 7500 PIECES).

EXAMPLE: MBRA120TR - 15000 PIECES

MBRA120

Bulletin PD-20643 rev. D 03/03

International
IOR Rectifier

Data and specifications subject to change without notice.
This product has been designed for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309

Visit us at www.irf.com for sales contact information. 03/03