

# ER600 THRU ER606

## SUPERFAST RECOVERY RECTIFIERS

VOLTAGE - 50 to 600 Volts CURRENT - 6.0 Amperes

### FEATURES

- Superfast recovery times-epitaxial construction
- Low forward voltage, high current capability
- Exceeds environmental standards of MIL-S-19500/228
- Hermetically sealed
- Low leakage
- High surge capability
- Plastic package has Underwriters Laboratories Flammability Classification 94V-0 utilizing Flame Retardant Epoxy Molding Compound

### MECHANICAL DATA

Case: Molded plastic, P600

Terminals: Axial leads, solderable to MIL-STD-202,


Method 208

Polarity: Color Band denotes cathode end

Mounting Position: Any

Weight: 0.07 ounce, 2.1 grams

P600

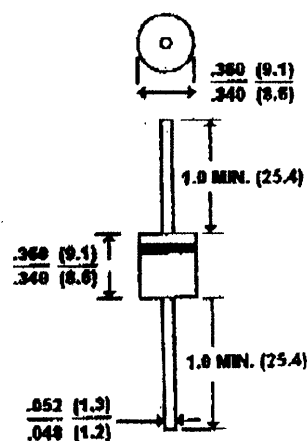

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Resistive or inductive load, 60Hz.

Resistive or inductive load, 60Hz.	ER600	ER601	ER601A	ER602	ER603	ER604	ER606	UNITS
Maximum Recurrent Peak Reverse Voltage	50	100	150	200	300	400	600	V
Maximum RMS Voltage	35	70	105	140	210	320	420	V
Maximum DC Blocking Voltage	50	100	150	200	300	400	600	V
Maximum Average Forward Current .375"(9.5mm) lead length at T <sub>A</sub> =55°C	6.0							A
Peak Forward Surge Current, I <sub>FM</sub> (surge): 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	150.0							A
Maximum Forward Voltage at 6.0A DC	.95				1.25		1.7	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	5.0				μA			
Maximum DC Reverse Current at Rated DC Blocking Voltage T <sub>A</sub> =125°C	300				μA			
Maximum Reverse Recovery Time(Note 1)	35.0				ns			
Typical Junction capacitance (Note 2)	50				pF			
Typical Junction Resistance(Note 3) R <sub>θJA</sub>	25.0				°C/W			
Operating and Storage Temperature Range T <sub>J</sub>	-55 to +150				°C			

PANJIT

## NOTES:

1. Reverse Recovery Test Conditions:  $I_F = .5A$ ,  $I_R = 1A$ ,  $I_{RR} = .25A$
2. Measured at 1 MHz and applied reverse voltage of 4.0 VDC
3. Thermal resistance from junction to ambient and from junction to lead length 0.375" (9.5mm) P.C.B. mounted

## RATING AND CHARACTERISTIC CURVES

ER600 THRU ER606

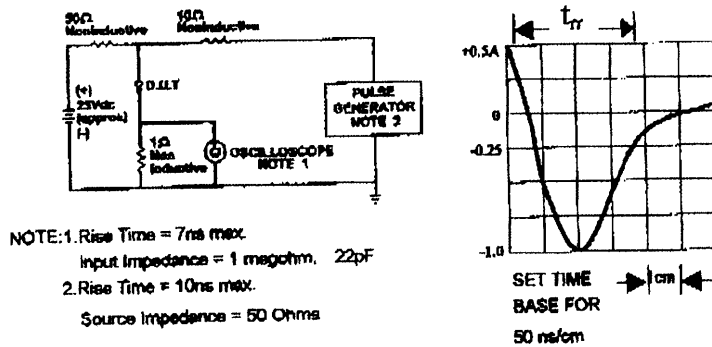


Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

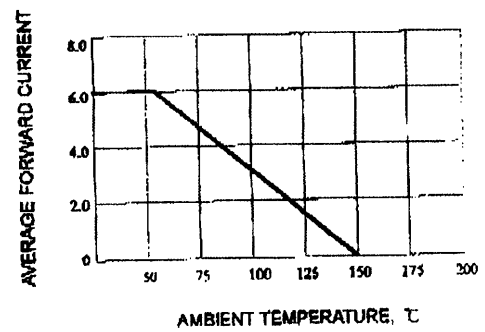


Fig. 2-MAXIMUM AVERAGE FORWARD CURRENT RATING

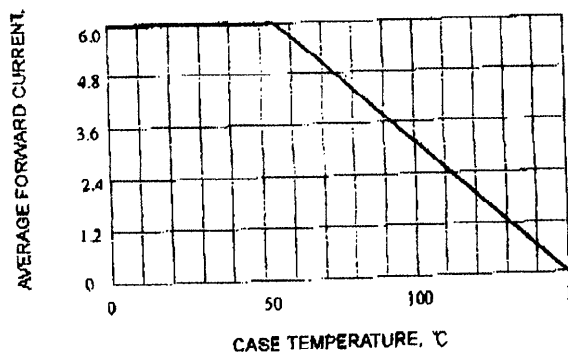


Fig. 3-MAXIMUM AVERAGE FORWARD CURRENT RATING

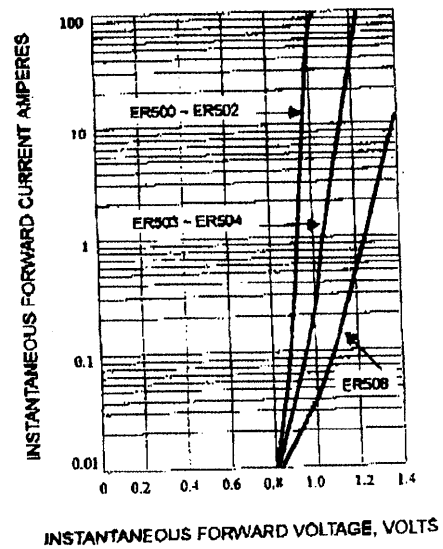


Fig. 4-FORWARD CURRENT DERATING CURVE

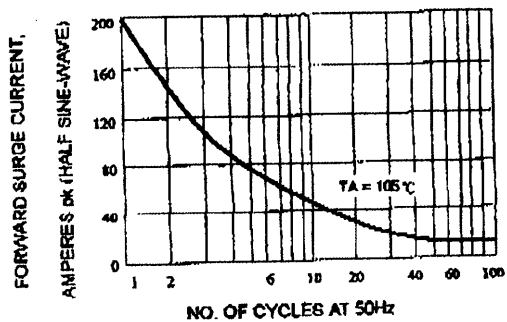


Fig. 5-MAXIMUM NON-REPETITIVE SURGE CURRENT

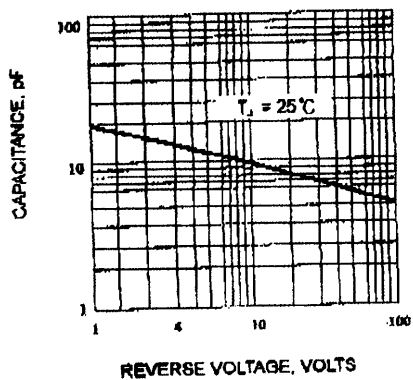


Fig. 6-TYPICAL JUNCTION CAPACITANCE