

Coaxial

Low Pass Filter

50Ω DC to 60 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Features

- rugged shielded case
- other standard and custom BLP models available with wide selection of fco

Applications

- test equipment
- lab use
- video equipment

BLP-70+
BLP-70

CASE STYLE: FF55

Connectors	Model	Price	Qty.
BNC	BLP-70(+)	\$32.95 ea.	(1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Low Pass Filter Electrical Specifications

PASSBAND (MHz)	fco (MHz) Nom.	STOPBAND (MHz)	VSWR (:1)
(loss < 1 dB)	(loss 3 dB)	(loss > 20 dB) (loss > 40 dB)	Passband Typ. Stopband Typ.
DC-60	67	90-117 117-300	1.7 18


Outline Drawing

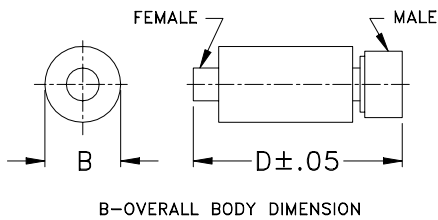


Outline Dimensions (inch/mm)

B	D	wt
.54	2.59	grams
13.72	65.79	40.0

typical frequency response



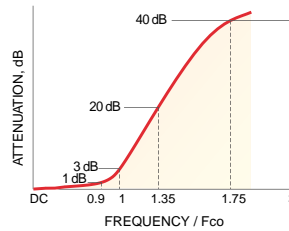


electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	\bar{x} σ			
1.00	0.02 0.1	41.6	1.00	12.18
12.00	0.09 0.1	35.7	12.00	12.27
23.00	0.14 0.1	25.9	23.00	12.70
34.00	0.30 0.1	17.1	34.00	13.24
45.50	0.38 0.1	15.3	45.50	14.84
56.50	0.48 0.1	18.3	56.50	17.75
60.00	0.57 0.1	17.8	60.00	19.13
64.00	0.81 0.1	13.9	62.00	20.78
67.00	1.27 0.2	9.8	64.00	22.11
70.00	2.40 0.5	5.9	66.00	24.56
75.00	6.44 0.7	1.9	67.00	25.58
82.00	14.32 0.6	0.3	70.00	27.33
85.00	17.61 0.6	0.1	72.00	27.29
88.00	20.73 0.5	0.1	75.00	23.25
90.00	22.72 0.5	0.1	80.00	16.05
92.00	24.63 0.4	0.1	82.00	13.76
100.00	31.63 0.3	0.2	85.00	10.85
105.00	35.63 0.3	0.2	88.00	9.20
110.00	39.22 0.3	0.3	90.00	8.00
115.00	42.79 0.3	0.3	92.00	7.14
117.00	44.09 0.3	0.3	95.00	7.25
167.00	71.03 2.8	0.3	100.00	4.98
189.50	71.25 4.9	0.3	102.00	2.55
211.50	78.21 8.2	0.2	105.00	5.78
233.50	79.29 6.9	0.2	110.00	3.41
255.50	79.68 7.6	0.2	115.00	1.56
267.00	78.34 9.9	0.2	117.00	7.50
278.00	76.60 3.1	0.1	167.00	7.04
289.00	75.01 2.8	0.1	178.00	6.83
300.00	74.09 4.1	0.1	189.50	6.54

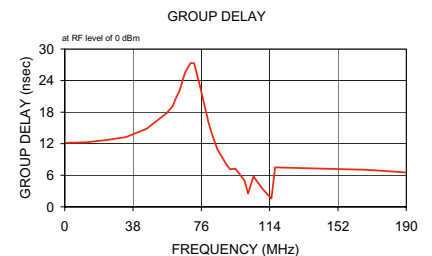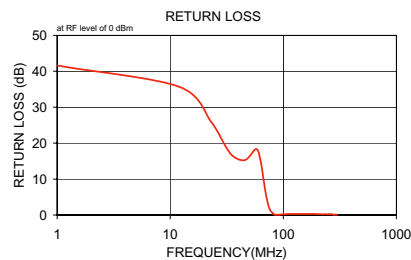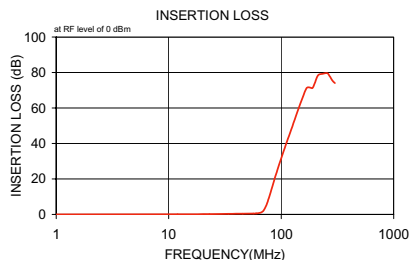

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

REV. A
M98898
BLP-70
060531