

Ceramic Low Pass Filter

DC to 2500 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	10W max. at 25°C
DC Current Input to Output	0.5A max. at 25°C


*Passband rating, derate linearly to 3.5W at 100°C ambient.

Pin Connections

RF IN	1**
RF OUT	3**
GROUND	2,4

**RF IN & RF OUT can be interchanged

Outline Drawing

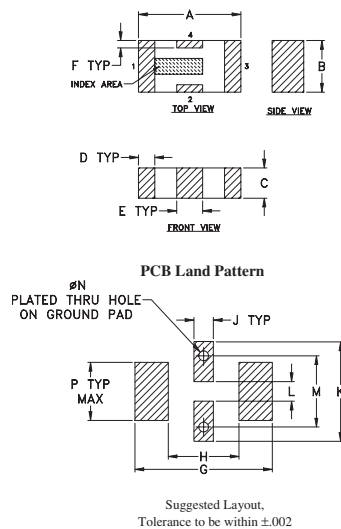


Outline Dimensions (inch)

A	B	C	D	E	F	G
.126	.063	.037	.020	.032	.009	.169
3.20	1.60	0.94	0.51	0.81	0.23	4.29

H	J	K	L	M	N	P	wt
.087	.024	.122	.024	.087	.012	.071	grams
2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

Demo Board MCL P/N: TB-270 Suggested PCB Layout (PL-137)

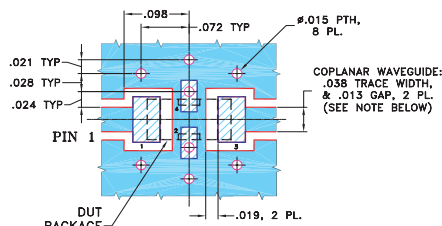

NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020" ± .0015", COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- excellent power handling, 10W
- small size
- 7 sections
- temperature stable
- protected by US Patent 6,943,646

Applications

- harmonic rejection
- VHF/UHF transmitters/receivers
- lab use

LFCN-2500+ LFCN-2500



CASE STYLE: FV1206

Model	Price	Qty.
LFCN-2500+	\$1.99	(10-49)
LFCN-2500	\$1.99	(10-49)
LFCN-2500D+	\$2.49	(10-49)
LFCN-2500D	\$2.49	(10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)


The + suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Low Pass Filter Electrical Specifications¹ (T_{AMB}=25°C)


MODEL NO.	PASSBAND (MHz) (loss < 1 dB) Max.	fco, MHz Nom. (loss 3 dB) Typ.	STOP BAND (MHz) (loss, dB)			VSWR (:1)		NO. OF SECTIONS
			F 20 Min.	30 Typ.	FR 20 Typ.	Stopband Typ.	Passband Typ.	
LFCN-2500(+)	DC-2500	3075	3675	3800-6100	8000	20	1.2	7

1. For Applications requiring DC voltage to be applied to the Input or output, use LFCN-2500D (DC Resistance to ground is 100 Mohms min.)

typical frequency response





schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	0.05	1.02
2000	0.50	1.26
2530	0.80	1.24
3000	2.72	2.58
3660	24.30	23.81
3760	29.63	28.03
4000	43.19	31.03
5000	34.98	26.33
6000	34.38	24.48
7000	26.29	26.74
8000	22.85	27.59
10000	19.22	18.30
12000	14.60	13.09
15000	17.48	3.73
20000	15.48	4.84

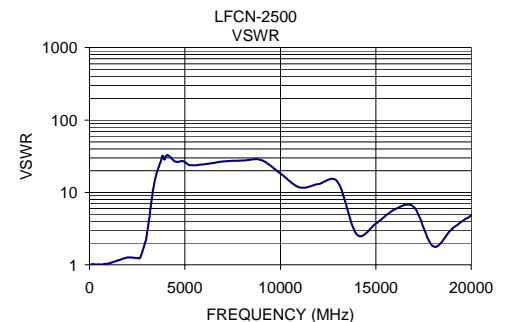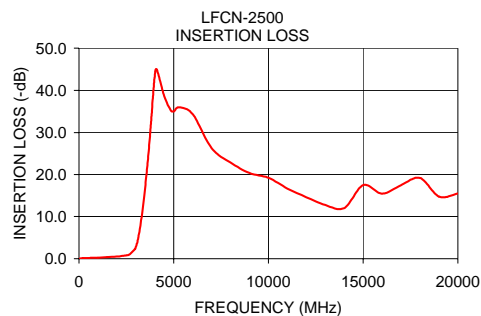

Mini-Circuits®

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>



REV. C
M98898
LFCN-2500
EDR-6783/2
RVN/AD/CP/AM
060725