

Ceramic Low Pass Filter

50Ω DC to 6000 MHz

LFCN-6000+ LFCN-6000



Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	9W max. at 25°C
DC Current Input to Output	0.5A max. at 25°C


* Passband rating, derate linearly to 3W at 100°C ambient.

Pin Connections

RF IN	1**
RF OUT	3**
GROUND	2,4

** RF IN & RF OUT can be interchanged


Outline Drawing

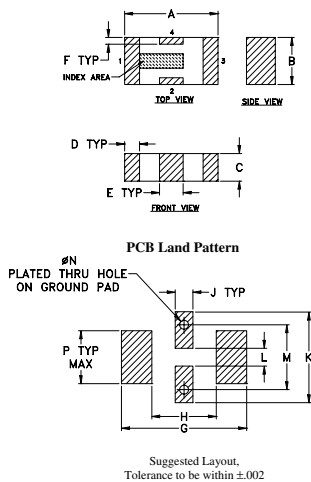

Outline Dimensions (inch)

A	B	C	D	E	F	G	
.126	.063	.037	.020	.032	.009	.169	
3.20	1.60	0.94	0.51	0.81	0.23	4.29	
H	J	K	L	M	N	P	wt
.087	.024	.122	.024	.087	.012	.071	grams
2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

Demo Board MCL P/N: TB-270 Suggested PCB Layout (PL-137)

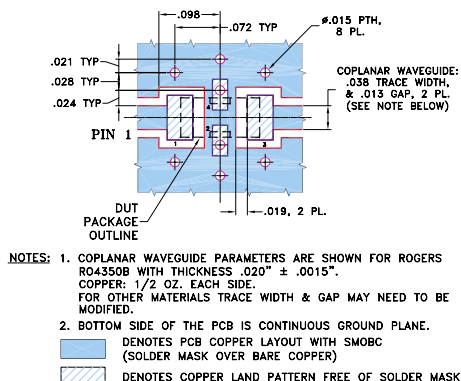

Features

- excellent power handling, 9W
- small size
- 7 sections
- temperature stable
- protected by U.S. Patent 6,943,646

Applications

- harmonic rejection
- VHF/UHF transmitters/receivers
- lab use

CASE STYLE: FV1206

Model	Price	Qty.
LFCN-6000+	\$1.99	(10-49)
LFCN-6000	\$1.99	(10-49)
LFCN-6000D+	\$2.49	(10-49)
LFCN-6000D	\$2.49	(10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications¹ (T_{AMB} = 25°C)


PASSBAND (MHz) (loss < 1.2 dB) Max.	fco, MHz Nom. (loss 3 dB) Typ.	STOP BAND (MHz) (loss, dB) F 20 30 FR 20 Min. Typ. Typ.			VSWR (:1) Stopband Passband Typ. Typ.		NO. OF SECTIONS
DC-6000	6800	8500	8700-10500	18000	20	1.3	7

1. For applications requiring DC voltage to be applied to the Input or output, use LFCN-6000D (DC Resistance to ground is 100 Mohms min.)

typical frequency response





electrical schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50.00	0.06	1.04
100.00	0.05	1.03
1000.00	0.17	1.07
3000.00	0.34	1.19
5000.00	0.62	1.42
6000.00	0.92	1.38
6800.00	3.17	3.20
8000.00	31.72	17.93
8720.00	36.21	17.93
10000.00	28.08	13.19
12000.00	21.34	12.09
13700.00	17.33	7.73
15000.00	16.79	7.05
18000.00	19.65	7.47
20000.00	23.96	8.51

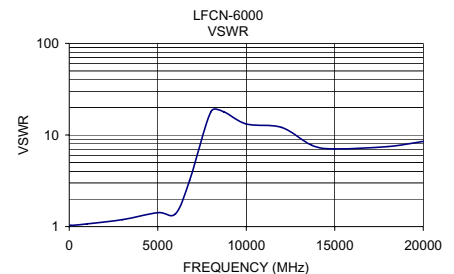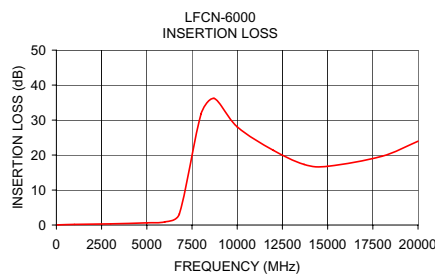

designers kit available

Kit No.	No. of Units in Kit	Description	Price \$ per Kit
K2-LFCN	60	5 of each: LFCN-800,-900,-1000,-1200,-1325,-1700,-2000,-2250,-2400,-5000,-6000,-6700	119.95

Mini-Circuits®

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>



REV. F
M104900
LFCN-6000
EDR-6491/1
AD/RS/CP/AM
060912