

Miniature Ceramic Fixed Attenuator

50Ω 1W 5dB DC to 7000 MHz

PAT-5+
PAT-5



Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Pin Connections

INPUT	1
OUTPUT	3
GROUND	2,4

Features

- wideband, DC to 7000 MHz
- excellent VSWR, through entire band
- miniature size
- aqueous washable

Applications

- power leveling
- impedance match improvement

CASE STYLE: AF320

PRICE: \$2.95 ea. QTY (10-49)

**+ RoHS compliant in accordance
with EU Directive (2002/95/EC)**


The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Electrical Specifications at 25°C

FREQ. RANGE (MHz)	ATTENUATION (dB)			VSWR (:1) Max.			MAX. INPUT POWER (W)
	Flatness, Max.	DC-1 GHz	DC-2.5 GHz	DC-f _u GHz	DC-1 GHz	DC-2.5 GHz	
f _L -f _u	Norm.						
DC-7000	5±0.3	0.3	0.5	1.0	1.2	1.3	1.4

1. RF power at 25°C case temperature: 1 Watt. Derate linearly to 0.1 Watt at 100°C.


Outline Drawing

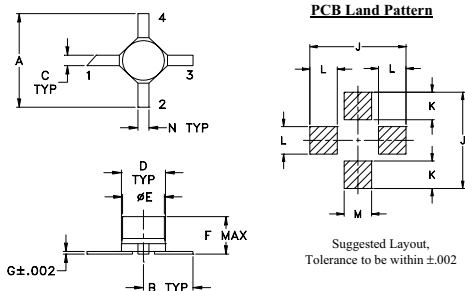

Outline Dimensions (inch/mm)



A	B	C	D	E	F	G
.200	.100	.020	.070	.068	.057	.005
5.08	2.54	0.51	1.78	1.73	1.45	0.13
H	J	K	L	M	N	wt
--	.230	.065	.060	.080	.040	grams
--	5.84	1.65	1.52	2.03	1.02	0.04

Demo Board MCL P/N: TB-319 Suggested PCB Layout (PL-208)

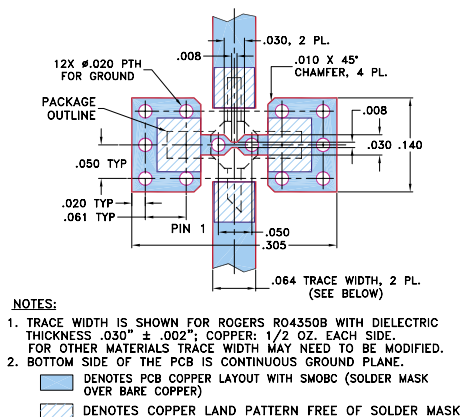

Typical Performance Data

Frequency (MHz)	Attenuation (dB)	VSWR (:1)
50.00	5.18	1.05
796.25	5.23	1.07
1542.50	5.28	1.09
2288.75	5.36	1.11
3035.00	5.51	1.13
3781.25	5.39	1.14
4527.50	5.44	1.12
5273.75	5.54	1.10
6020.00	5.67	1.12
7015.00	5.95	1.21

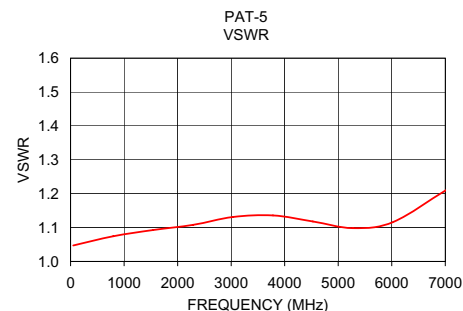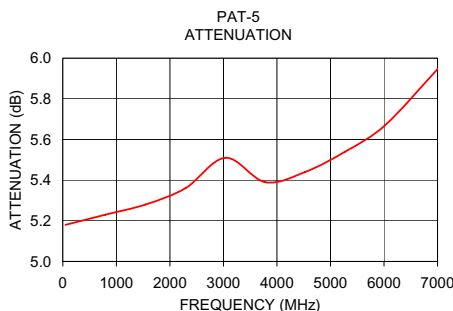

Mini-Circuits®

INTERNET <http://www.minicircuits.com>
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified



REV. F
M105530
PAT-5
060815