

Surface Mount

# Voltage Controlled Oscillator

ROS-244+

Linear Tuning 170 to 244 MHz

## Features

- Linear tuning characteristics
- High power output, +10 dBm typ.
- Low phase noise
- Low pulling
- Low pushing
- Aqueous washable

## Applications

- PLL circuitry
- Television
- Military communication



CASE STYLE: CK605  
PRICE: \$15.95 ea. QTY (5-49)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

*The +suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.*

## Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies,kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @12 dBr (MHz)	PUSHING (MHz/V)	DC OPERATING POWER				
	Min.	Max.		Typ.	1	10	100	1000	VOLTAGE RANGE (V)	SENSI- TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)		Typ.	Typ.			Max.	Typ.	Typ.	Vcc (volts)	Current (mA)
ROS-244+	170	244	+10	-96	-123	-143	-162	2	16	6	215	50	-90	-20	-	0.1	0.1	12	32			


## Pin Connections

RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16


## Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	12.7V
Absolute Max. Tuning Voltage (Vtune)	18V
All specifications	50 ohm system

## Outline Drawing

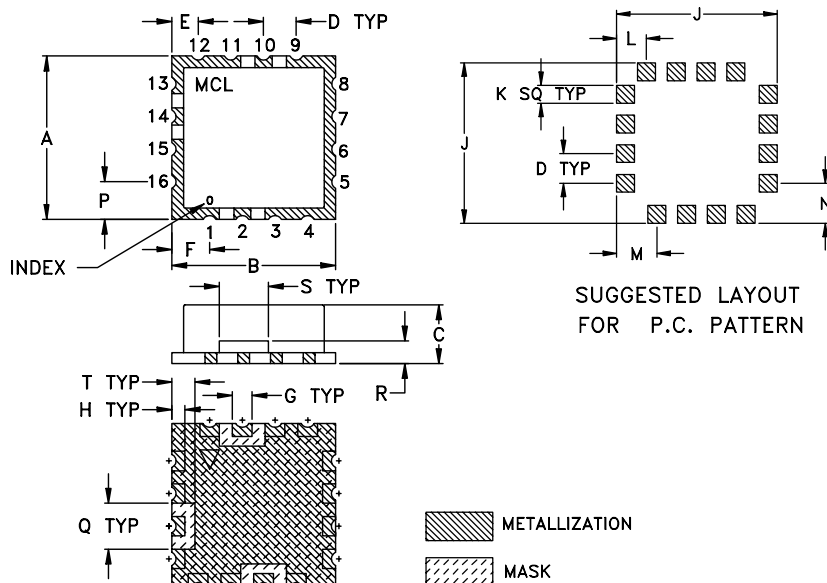

## Demo Board MCL P/N: TB-10 Suggested PCB Layout (PL-012)

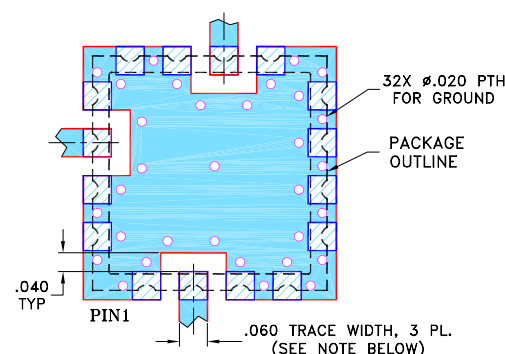

- NOTES:**
1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0

**Mini-Circuits®**

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>



REV. OR  
M106250  
EDR-8037  
ROS-244+  
RAV  
060712  
page 1 of 2

# Performance Data & Curves\*

# ROS-244+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 207 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	7.66	152.6	152.0	151.7	9.14	8.74	8.36	25.57	-9.2	-30.0	-48.2	0.10	0.07	-92.1	-118.0	-137.5	-157.9	1.0	-96.74
0.50	6.26	156.4	155.8	155.6	9.05	8.72	8.40	25.64	-10.1	-30.4	-47.8	0.07	0.06	-93.4	-118.3	-139.2	-159.0	2.0	-105.29
1.00	5.61	159.5	158.9	158.7	9.03	8.73	8.45	25.69	-10.9	-30.7	-47.7	0.05	0.05	-94.7	-119.9	-140.1	-159.5	3.5	-112.59
1.50	5.27	162.4	161.7	161.5	9.02	8.75	8.50	25.74	-11.5	-30.8	-47.1	0.05	0.05	-94.2	-120.9	-140.5	-161.4	6.0	-118.21
2.00	5.09	165.0	164.4	164.1	9.01	8.77	8.54	25.78	-12.1	-31.0	-46.5	0.04	0.04	-95.0	-120.6	-141.1	-160.9	8.5	-121.73
2.50	5.03	167.6	166.9	166.6	9.04	8.79	8.58	25.83	-12.7	-31.3	-46.2	0.04	0.04	-96.2	-121.6	-141.8	-160.5	10.0	-123.16
3.00	5.05	170.2	169.4	169.0	9.09	8.86	8.65	25.87	-13.3	-31.5	-46.0	0.03	0.03	-96.3	-121.4	-141.9	-161.2	20.8	-129.23
4.00	5.25	175.4	174.5	174.1	9.22	9.02	8.84	25.95	-14.5	-31.9	-45.0	0.03	0.02	-96.0	-122.8	-142.2	-162.8	35.5	-134.00
5.00	5.61	180.8	179.8	179.3	9.40	9.21	9.03	26.03	-15.5	-32.5	-44.8	0.02	0.01	-95.7	-122.2	-143.0	-162.0	60.7	-138.36
6.00	6.10	186.7	185.6	185.0	9.57	9.38	9.20	26.11	-16.5	-32.8	-44.4	0.02	0.02	-98.8	-123.2	-143.1	-160.9	86.7	-142.38
7.00	6.46	192.9	191.8	191.1	9.74	9.54	9.37	26.21	-17.7	-32.8	-43.5	0.03	0.04	-97.4	-122.9	-143.1	-162.1	100.0	-143.23
8.00	6.63	199.4	198.3	197.6	9.88	9.69	9.54	26.30	-18.9	-33.6	-43.0	0.05	0.06	-97.1	-123.3	-143.5	-161.7	148.1	-146.81
9.00	6.61	206.0	204.9	204.2	10.04	9.85	9.70	26.38	-19.8	-33.6	-42.2	0.08	0.08	-95.8	-123.0	-143.3	-161.9	177.0	-148.22
10.00	6.45	212.6	211.5	210.8	10.23	10.04	9.89	26.47	-21.0	-34.3	-42.0	0.09	0.08	-96.1	-123.6	-143.3	-163.9	211.6	-149.84
11.00	6.29	219.0	217.9	217.2	10.43	10.24	10.10	26.54	-22.2	-34.1	-41.7	0.09	0.08	-94.7	-121.9	-143.6	-161.9	302.4	-152.80
12.00	6.17	225.3	224.1	223.4	10.55	10.38	10.24	26.60	-22.9	-34.6	-41.4	0.08	0.06	-96.7	-123.4	-143.6	-163.2	361.5	-154.32
13.00	6.14	231.5	230.3	229.5	10.54	10.39	10.26	26.64	-23.6	-34.2	-40.9	0.07	0.06	-97.9	-122.4	-143.3	-163.3	507.5	-156.82
14.00	6.17	237.7	236.4	235.7	10.49	10.35	10.24	26.70	-24.3	-34.0	-40.6	0.06	0.10	-95.8	-121.6	-143.1	-162.2	606.7	-158.51
15.00	6.20	243.9	242.6	241.8	10.30	10.19	10.09	26.75	-24.6	-33.5	-40.2	0.07	0.14	-95.4	-121.8	-143.3	-162.0	851.6	-161.69
16.00	6.10	250.0	248.8	248.0	10.02	9.91	9.84	26.81	-24.7	-33.4	-39.9	0.10	0.17	-95.0	-121.5	-142.7	-162.7	1000.0	-163.09

\*at 25°C unless mentioned otherwise

