


Plug-In Frequency Mixer

SRA-8+

Level 7 (LO Power +7 dBm) 0.0005 to 10 MHz



CASE STYLE: A01
PRICE: \$34.20 ea. QTY (1-9)

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Pin Connections

LO	8
RF	1
IF	3,4 [^]
GROUND	2,5,6,7

[^] pins must be connected together externally

Features

- excellent conversion loss, 5.69 dB typ.
- high L-R isolation, 50 dB typ. L-I isolation, 50 dB typ.
- rugged welded construction
- hermetic

Applications

- IF signal processing
- AM broadcasting radio

**+ RoHS compliant in accordance
with EU Directive (2002/95/EC)**

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF f_L - f_U	IF	Mid-Band m		Total Range		L		M		U		L		M		U	
		\bar{X}	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
.0005-10	DC-10	5.69	.11	7.5	8.5	60	50	50	40	45	35	60	50	50	40	45	35

1 dB COMP.: +1 dBm typ.

L = low range [f_L to 10 f_L]
m = mid band [$2f_L$ to $f_U/2$]
M = mid range [10 f_L to $f_U/2$]
U = upper range [$f_U/2$ to f_U]

Outline Drawing

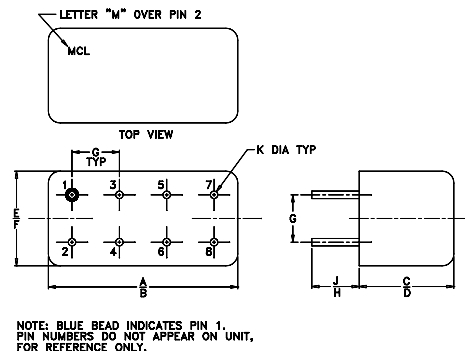


Outline Dimensions (inch/mm)

A	B	C	D	E	F
.770	.800	.385	.400	.370	.400
19.56	20.32	9.78	10.16	9.40	10.16
G	H	J	K		
.200	.20	.14	.031		
5.08	5.08	3.56	0.79		
				wt	grams
					5.2

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
0.001	3.00	5.26	71.79	72.81	1.41	3.30
0.002	3.00	4.96	75.56	77.65	1.37	2.70
0.005	3.01	4.92	73.77	80.99	1.38	2.54
0.01	3.01	4.88	71.40	77.86	1.37	2.46
0.02	3.02	4.84	71.49	76.56	1.37	2.41
0.05	3.05	4.84	72.03	78.05	1.38	2.32
0.10	3.10	4.79	71.80	78.10	1.38	2.29
0.20	3.20	4.88	71.48	77.93	1.38	2.21
0.50	3.50	4.86	71.98	77.73	1.37	2.10
0.70	3.70	4.83	71.60	76.54	1.37	1.98
1.00	4.00	4.88	71.65	75.42	1.37	1.95
1.43	4.43	4.91	71.81	71.58	1.37	1.94
2.00	5.00	4.91	72.01	69.03	1.36	1.96
2.86	5.86	4.97	71.64	64.97	1.37	2.01
4.29	7.29	5.16	71.16	59.46	1.36	2.03
5.00	8.00	5.17	71.48	58.01	1.36	2.02
6.43	9.43	5.18	70.78	54.45	1.36	1.98
7.14	4.14	5.21	70.73	53.39	1.36	1.94
8.57	5.57	5.23	70.34	50.80	1.36	1.92
10.00	7.00	5.22	70.10	48.53	1.35	1.90

Electrical Schematic

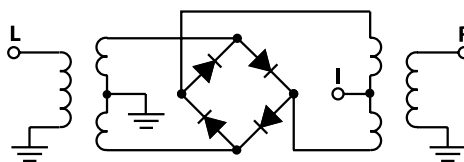

Performance Charts

SRA-8+

