

High Directivity Monolithic Amplifier

50Ω 0.5 to 2.5 GHz

NEW!
VNA-23


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 150°C
DC Voltage	8V
Power	400mW
Input Power (no damage)	10 dBm

Pin Connections

RF IN	3
RF OUT	6
DC	1
GND EXT.	2,4,5,7,8


Outline Drawing

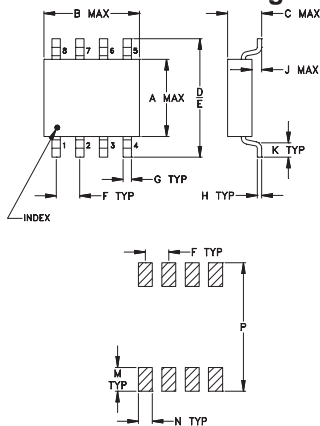

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
.163	.202	.077	.250	.220	.050	.017	.009
4.14	5.13	1.96	6.35	5.59	1.27	0.43	0.23
J	K	L	M	N	P	wt.	
.025	.030	—	.050	.030	.270	grams	
0.64	0.76	—	1.27	0.76	6.86	.10	

Demo Board MCL P/N: TB-01 Suggested PCB Layout (PL-077)



CAPACITOR C1: 10000 ± 2% pF, 0805 SIZE
NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS .030" ± .002".
COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED
2. PTH LOCATIONS AS PER ARTWORK OF TEST BOARD B14-TB-01 (CONTACT MINI-CIRCUITS).
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
DENOTES PCB COPPER LAYOUT
DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Features

- 3V & 5V operation
- no external biasing circuit required
- high directivity, 18 dB typ.
- wide bandwidth, 0.5 to 2.5 GHz
- low noise figure, 5 dB typ.
- output power, up to +10 dBm typ.
- low cost

Applications

- buffer amplifier
- cellular
- PCN




CASE STYLE: XX211
PRICE: \$1.90 ea. QTY. (25)

Electrical Specifications (T_{AMB}=25°C)

FREQ. (GHz)	DC VOLTS (V)	GAIN (dB) Typical						MAXIMUM POWER (dBm) Output 1 dB Comp. Typ.	DYNAMIC RANGE		VSWR* (:1) Typ.		DIRECTIVITY (dB) (isolation-gain) Typ.	DC OPERATING CURRENT at Pin 3 (mA)		THERMAL RESIS- TANCE θjc Typ. °C/W
		0.5	1.0	1.5	2.0	2.5	Min. at 2 GHz		NF (dB) Typ. at 1 GHz	IP3 (dBm) Typ.	In	Out		Typ.	Typ.	
0.5-2.5	5.0 2.8	15.1 14.6	18.6 17.6	18.3 17.1	16.9 15.9	14.6 13.9	15.4 —	10 8.5	4.7 4.7	21 19	1.5 1.5	1.3 1.5	15-20 14-21	32 29	45 —	110




*VSWR above .75 GHz

biasing configuration



Typical Performance Data at 25°C

Frequency (MHz)	Gain (dB)		Pout (dBm) (@1dB COMP)		N.F. (dB)		VSWR IN		VSWR OUT	
	2.8V	5.0V	2.8V	5.0V	2.8V	5.0V	2.8V	5.0V	2.8V	5.0V
500.00	14.88	15.33	10.38	11.94	4.55	4.52	3.99	4.01	1.27	1.34
750.00	17.51	18.19	10.28	11.58	4.59	4.57	2.03	2.05	1.53	1.57
1000.00	18.00	18.90	9.59	10.42	4.84	4.74	1.73	1.69	1.65	1.67
1300.00	17.71	18.83	8.95	9.86	4.51	4.52	1.96	1.91	1.62	1.62
1500.00	17.36	18.48	8.69	9.49	4.45	4.42	2.09	2.05	1.56	1.53
1800.00	16.51	17.65	8.42	9.44	4.69	4.80	1.94	1.91	1.45	1.38
2000.00	16.02	17.08	8.59	9.60	4.75	4.82	1.69	1.65	1.39	1.28
2100.00	15.74	16.78	8.67	9.57	4.74	4.81	1.54	1.51	1.36	1.23
2300.00	14.97	15.92	8.95	9.92	4.80	4.97	1.22	1.22	1.32	1.13
2500.00	14.14	14.94	9.13	10.05	4.77	4.77	1.06	1.09	1.33	1.06



Mini-Circuits®

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

ISO 9001 CERTIFIED

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

REV. OR
M84602
ED-9810A/3
VNA-23
FL/TD/CP
021218