

FS5VS-14A

HIGH-SPEED SWITCHING USE


FS5VS-14A



- V_{DS} 700V
- $r_{DS(ON)}(MAX)$ 2.6Ω
- I_D 5A

OUTLINE DRAWING

Dimensions in mm

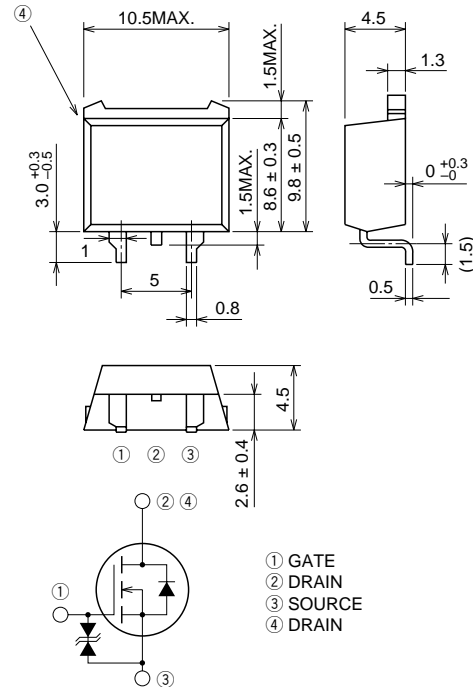

TO-220S

APPLICATION

SMPS, DC-DC Converter, battery charger, power supply of printer, copier, HDD, FDD, TV, VCR, personal computer etc.





MAXIMUM RATINGS (Tc = 25°C)

| Symbol | Parameter | Conditions | Ratings | Unit |
|-----------|---------------------------|---------------|-----------------|------|
| V_{DS} | Drain-source voltage | $V_{GS} = 0V$ | 700 | V |
| V_{GSS} | Gate-source voltage | $V_{DS} = 0V$ | ± 30 | V |
| I_D | Drain current | | 5 | A |
| I_{DM} | Drain current (Pulsed) | | 15 | A |
| P_D | Maximum power dissipation | | 100 | W |
| T_{ch} | Channel temperature | | $-55 \sim +150$ | °C |
| T_{stg} | Storage temperature | | $-55 \sim +150$ | °C |
| — | Weight | Typical value | 1.2 | g |


ELECTRICAL CHARACTERISTICS (T_{ch} = 25°C)

| Symbol | Parameter | Test conditions | Limits | | | Unit |
|------------------------|----------------------------------|---|--------|------|------|------|
| | | | Min. | Typ. | Max. | |
| V (BR) DSS | Drain-source breakdown voltage | I _D = 1mA, V _{GS} = 0V | 700 | — | — | V |
| V (BR) GSS | Gate-source breakdown voltage | I _{GS} = ±100μA, V _{DS} = 0V | ±30 | — | — | V |
| I _{GSS} | Gate-source leakage current | V _{GS} = ±25V, V _{DS} = 0V | — | — | ±10 | μA |
| I _{DSS} | Drain-source leakage current | V _{DS} = 700V, V _{GS} = 0V | — | — | 1 | mA |
| V _{GS} (th) | Gate-source threshold voltage | I _D = 1mA, V _{DS} = 10V | 2 | 3 | 4 | V |
| r _{DS} (ON) | Drain-source on-state resistance | I _D = 2A, V _{GS} = 10V | — | 2.0 | 2.6 | Ω |
| V _{DS} (ON) | Drain-source on-state voltage | I _D = 2A, V _{GS} = 10V | — | 4.0 | 5.2 | V |
| y _{fs} | Forward transfer admittance | I _D = 2A, V _{DS} = 10V | 2.5 | 4.2 | — | S |
| C _{iss} | Input capacitance | V _{DS} = 25V, V _{GS} = 0V, f = 1MHz | — | 770 | — | pF |
| C _{oss} | Output capacitance | | — | 88 | — | pF |
| C _{rss} | Reverse transfer capacitance | | — | 16 | — | pF |
| t _d (on) | Turn-on delay time | V _{DD} = 200V, I _D = 2A, V _{GS} = 10V, R _{GEN} = R _{GS} = 50Ω | — | 15 | — | ns |
| t _r | Rise time | | — | 18 | — | ns |
| t _d (off) | Turn-off delay time | | — | 90 | — | ns |
| t _f | Fall time | | — | 25 | — | ns |
| V _{SD} | Source-drain voltage | I _S = 2A, V _{GS} = 0V | — | 1.0 | 1.5 | V |
| R _{th} (ch-c) | Thermal resistance | Channel to case | — | — | 1.25 | °C/W |


PERFORMANCE CURVES

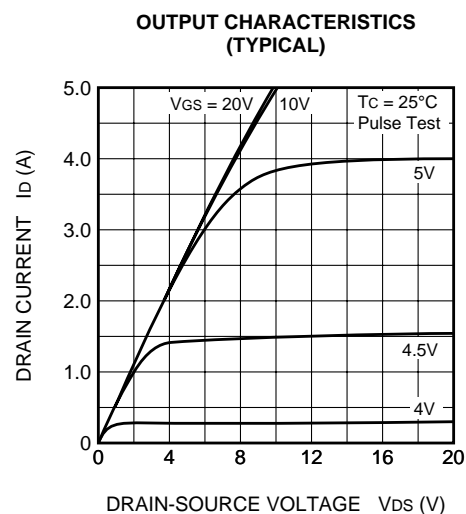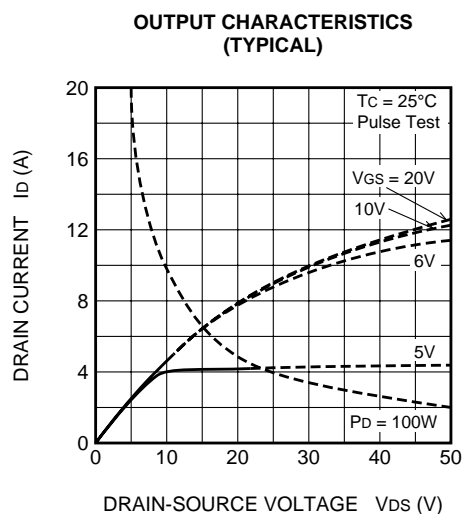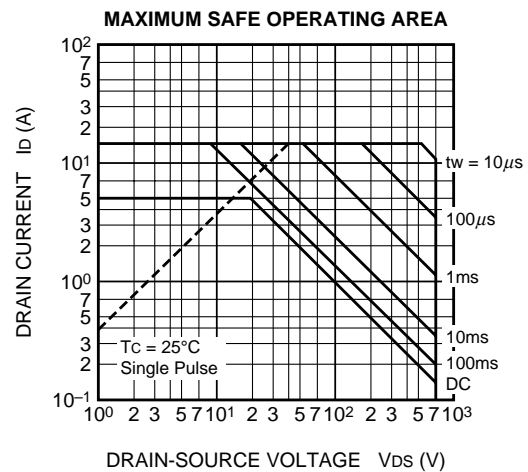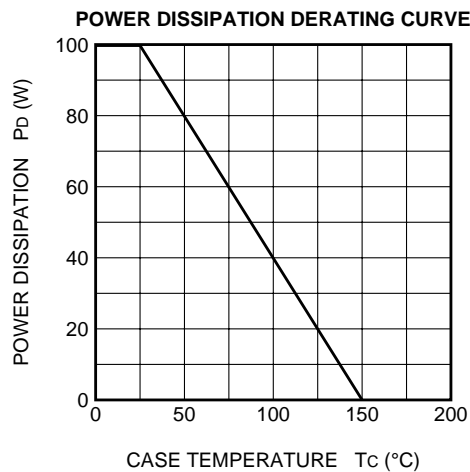


ON-STATE VOLTAGE VS.
GATE-SOURCE VOLTAGE
(TYPICAL)

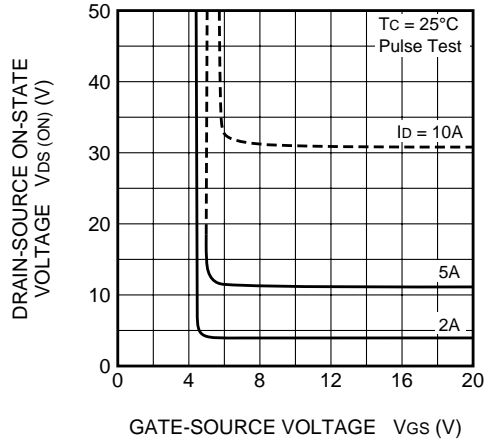


ON-STATE RESISTANCE VS.
DRAIN CURRENT
(TYPICAL)

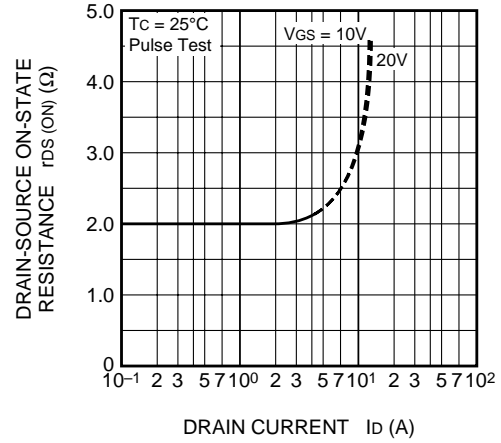


TRANSFER CHARACTERISTICS
(TYPICAL)

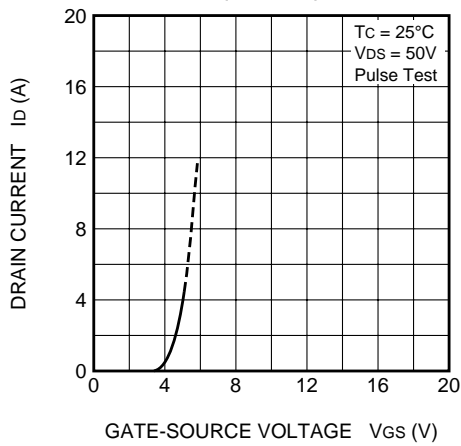


FORWARD TRANSFER ADMITTANCE
VS.DRAIN CURRENT
(TYPICAL)

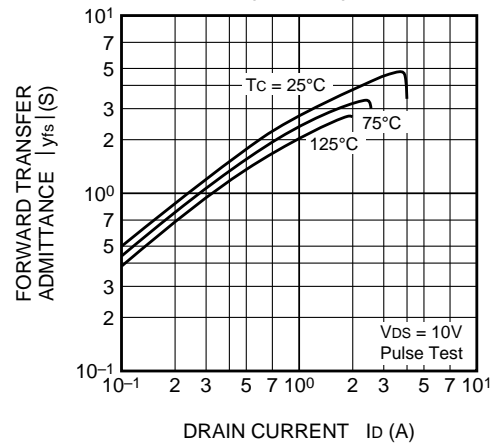


CAPACITANCE VS.
DRAIN-SOURCE VOLTAGE
(TYPICAL)

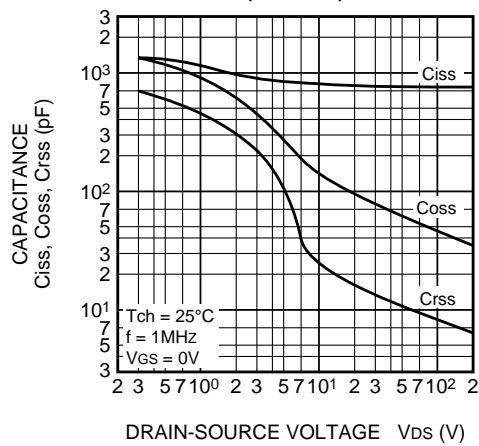


SWITCHING CHARACTERISTICS
(TYPICAL)

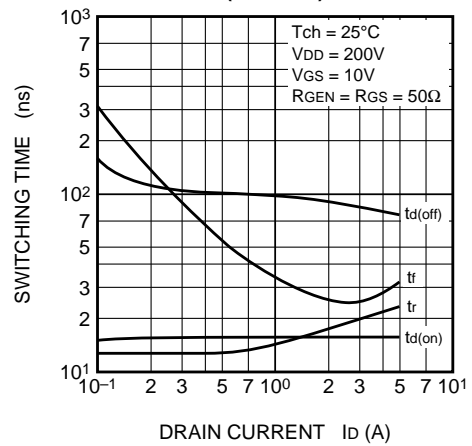


**GATE-SOURCE VOLTAGE
VS. GATE CHARGE
(TYPICAL)**

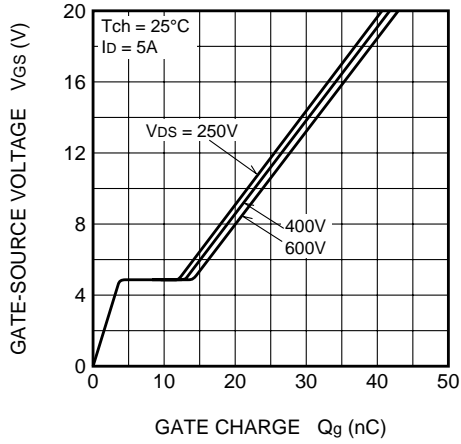


**SOURCE-DRAIN DIODE
FORWARD CHARACTERISTICS
(TYPICAL)**

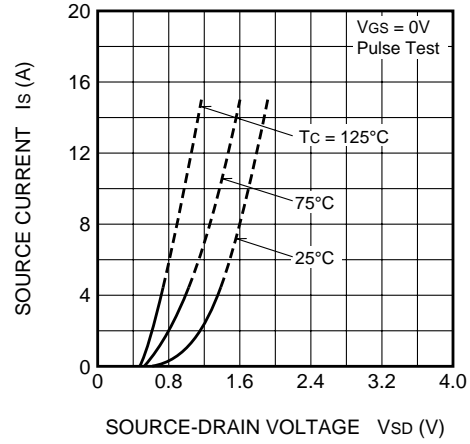


**ON-STATE RESISTANCE VS.
CHANNEL TEMPERATURE
(TYPICAL)**

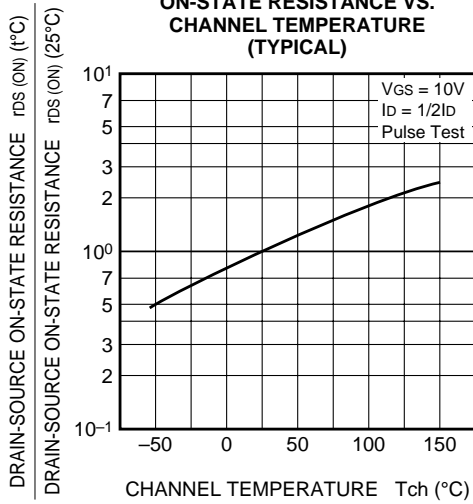

**THRESHOLD VOLTAGE VS.
CHANNEL TEMPERATURE
(TYPICAL)**

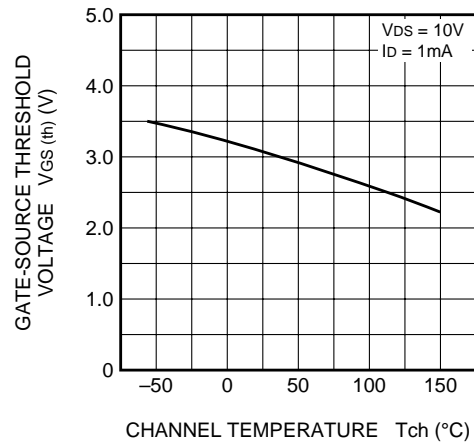

**BREAKDOWN VOLTAGE VS.
CHANNEL TEMPERATURE
(TYPICAL)**

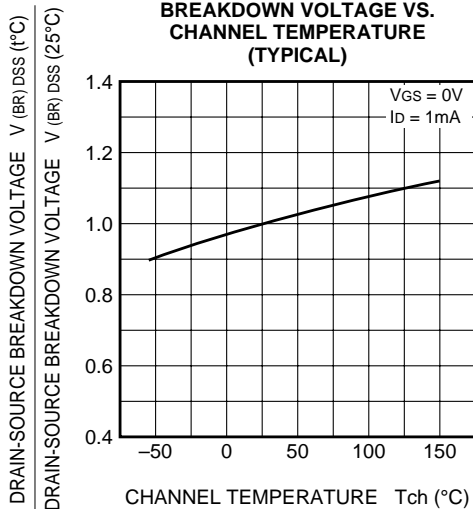

**TRANSIENT THERMAL IMPEDANCE
CHARACTERISTICS**

