


FRD Type : C16T40F-11A

OUTLINE DRAWING

FEATURES

- * **SQUARE-PAK** TO263AB Case (SMD)
- Packaged in 24mm Tape and Reel
- * Dual Diodes – Cathode Common
- * Ultra – Fast Recovery
- * Low Forward Voltage Drop
- * High Surge Capability
- * 200 Volts thru 600 Volts Types Available

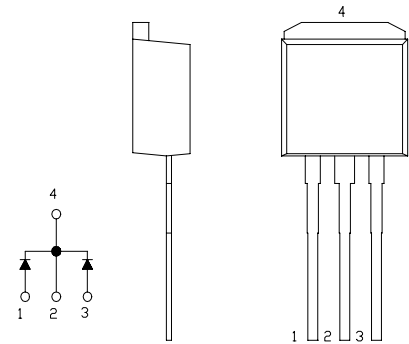

Maximum Ratings


Approx Net Weight:1.4g

Rating	Symbol	C16T40F-11A			Unit
Repetitive Peak Reverse Voltage	V _{RRM}	400			V
Non-repetitive Peak Reverse Voltage	V _{RSM}	440			V
Average Rectified Output Current	I _O	16	Tc=109℃	50 Hz,Full Sine Wave Resistive Load	A
RMS Forward Current	I _{F(RMS)}	18			A
Surge Forward Current	I _{FSM}	120	50 Hz Full Sine Wave,1cycle Non-repetitive		A
Operating JunctionTemperature Range	T _{jw}	- 40 to + 150			℃
Storage Temperature Range	T _{stg}	- 40 to + 150			℃

Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I_{RM}	$T_j=25^{\circ}\text{C}, V_{RM}=V_{RRM}$ per Arm	-	-	30	μA
Peak Forward Voltage	V_{FM}	$T_j=25^{\circ}\text{C}, I_{FM}=8\text{A}$ per Arm	-	-	1.25	V
Reverse Recovery Time	t_{rr}	$I_{FM}=8\text{A}$, $-di/dt=50\text{A}/\mu\text{s}$, $T_a=25^{\circ}\text{C}$	-	-	45	ns
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	-	-	2	$^{\circ}\text{C}/\text{W}$



C_T_ 11A OUTLINE DRAWING (Dimensions in mm)

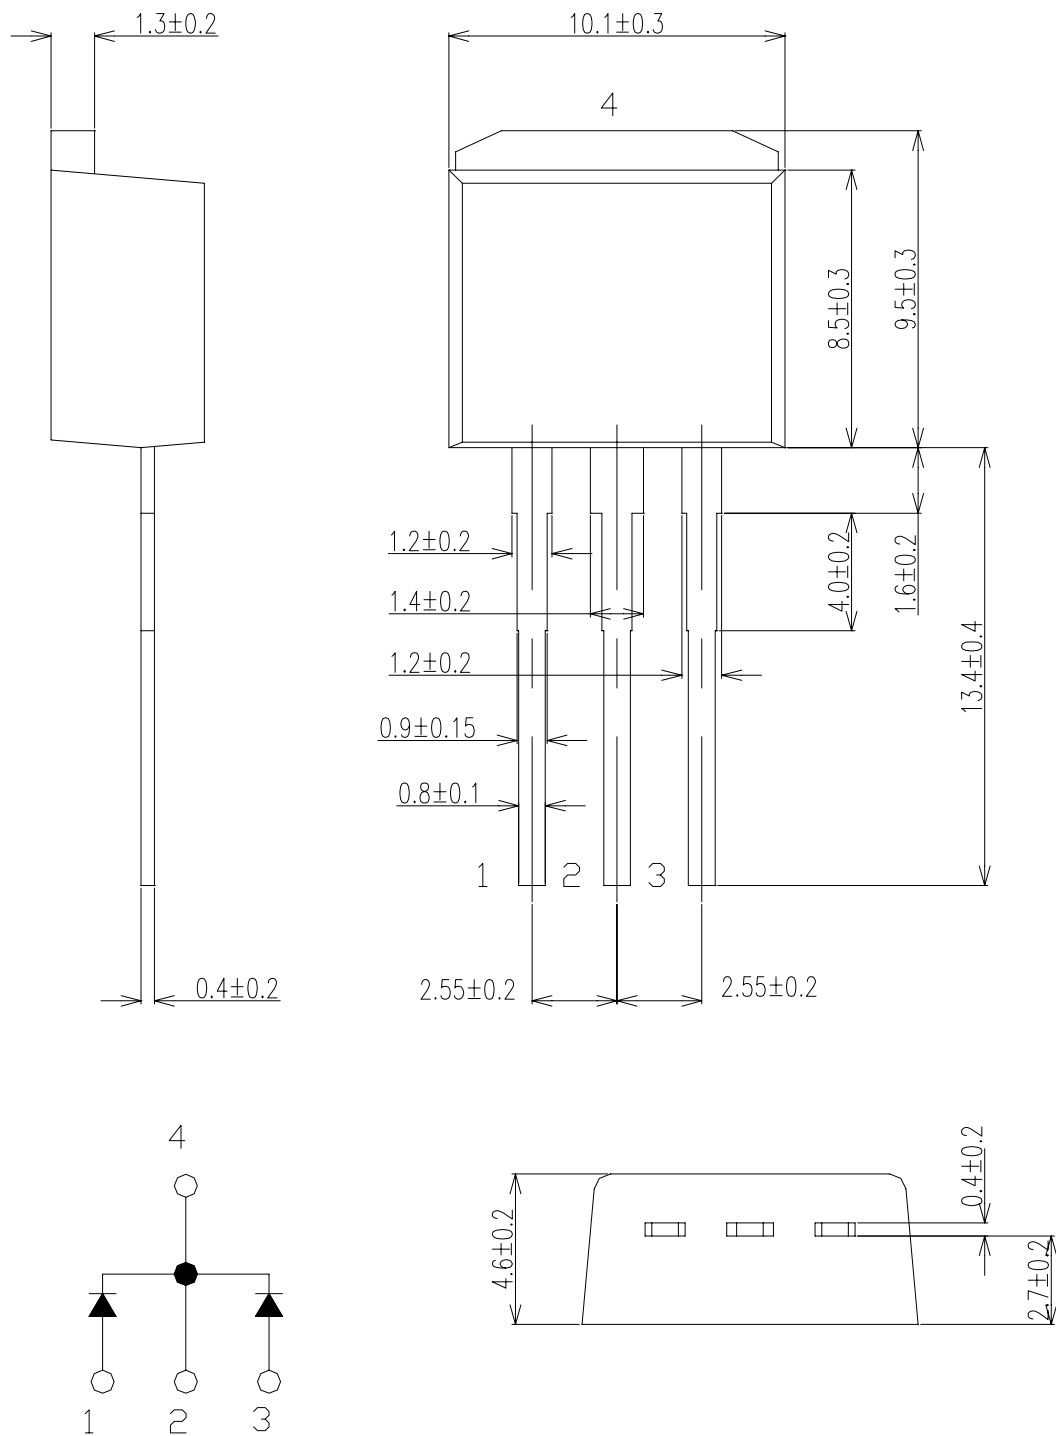

FORWARD CURRENT VS. VOLTAGE


10ms Sine Wave Single Pulse


C16T40F/C16T40F-11A (per Arm)

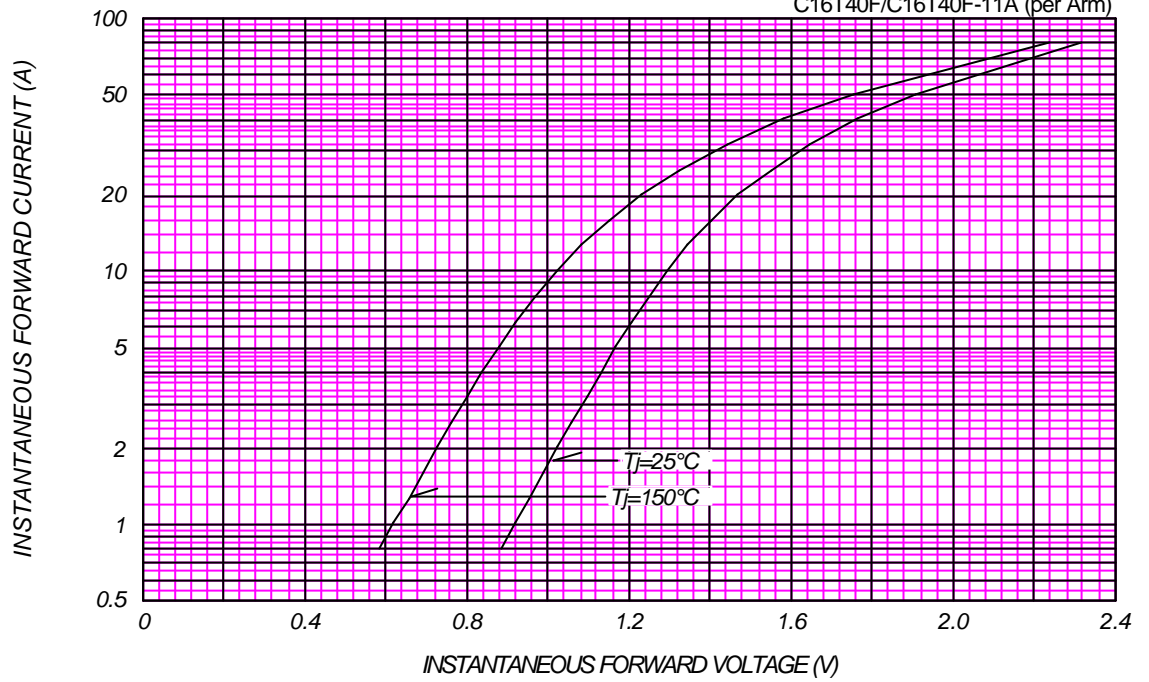


AVERAGE FORWARD POWER DISSIPATION

C16T40F/C16T40F-11A (Total)

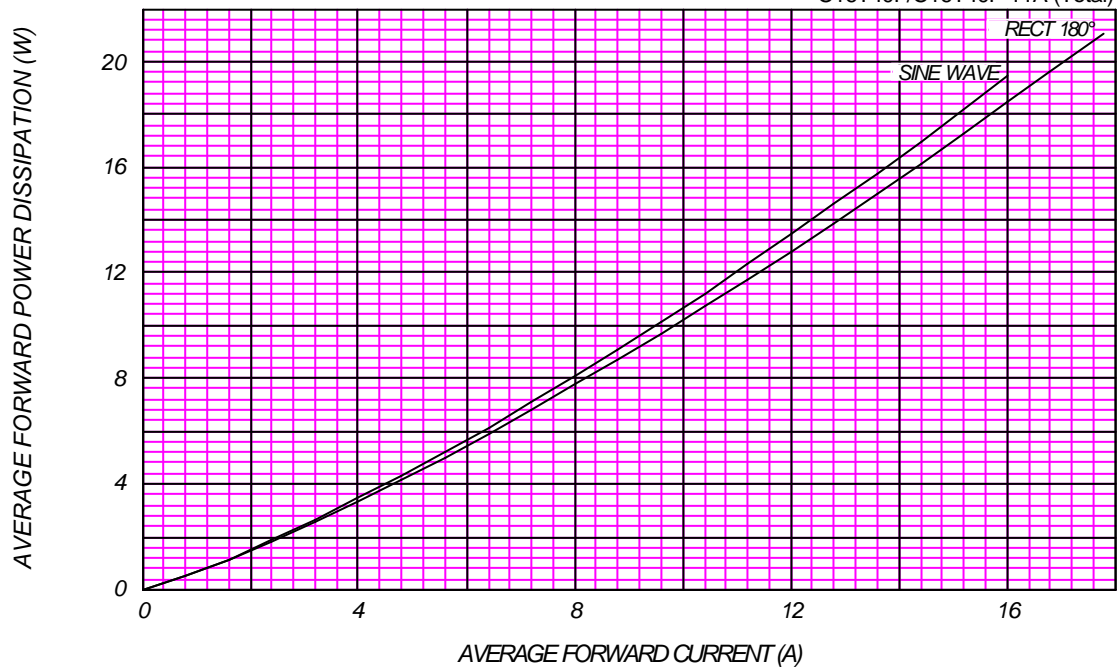



AVERAGE FORWARD CURRENT VS. CASE TEMPERATURE

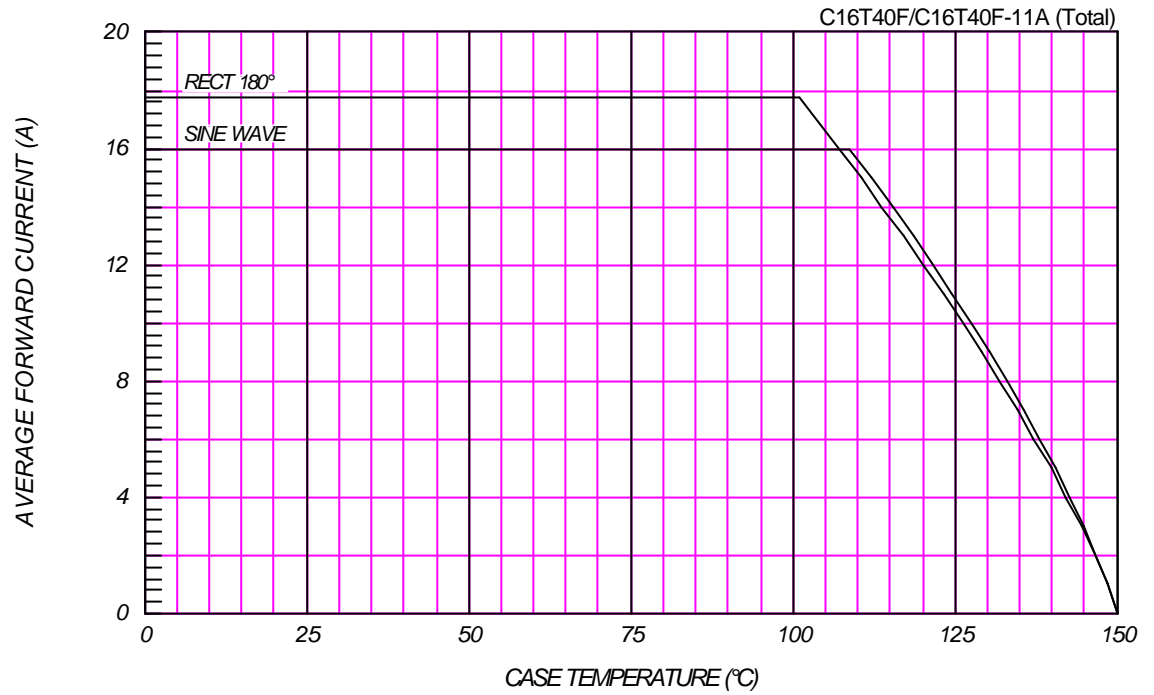

SURGE CURRENT RATINGS

f=50Hz, Sine Wave, Non-Repetitive, No Load

