

3-TERMINAL NEGATIVE VOLTAGE REGULATOR

■ GENERAL DESCRIPTION


The NJM79M00 series of 3-Terminal Negative Voltage Regulators are constructed using the New JRC Planar epitaxial process. These regulators employ internal current limiting, thermal shutdown and safe-area compensation, making them essentially indestructible. If adequate heat sinking is provided, they can deliver up to 500mA output current. They are intended as fixed voltage regulators in a wide range of applications including local (on-card) regulation for elimination of noise and distribution problems associated with single point regulation. In addition to use as fixed voltage regulators, these devices can be used with external components to obtain adjustable output voltages and currents.

■ FEATURES

- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Excellent Ripple Rejection
- Guarantee'd 500mA Output Current
- Package Outline TO-220F, TO-252
- Bipolar Technology

■ PACKAGE OUTLINE


(TO-220F)



NJM79M00FA

1. COMMON
2. IN
3. OUT

(TO-252)




NJM79M00DL1A

1. COMMON
2. IN
3. OUT

(note) The radiation fin is connected to Pin 2.

3

■ EQUIVALENT CIRCUIT

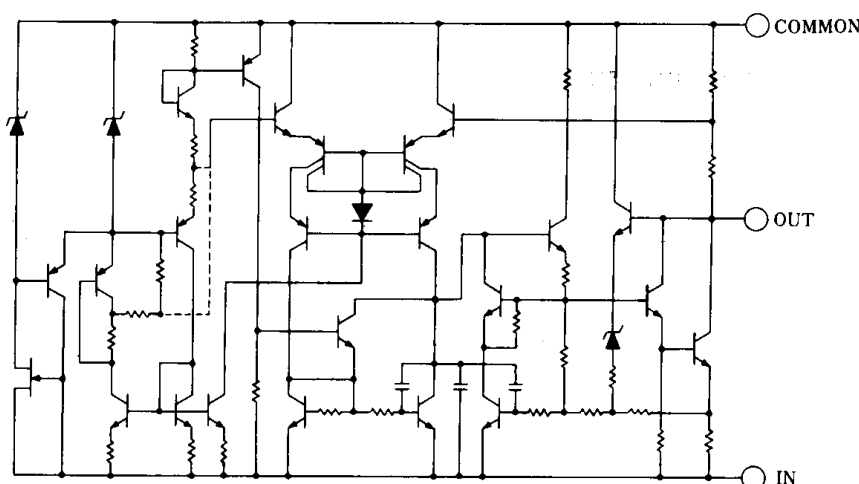

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MAXIMUM RATINGS		UNIT	
Input Voltage	V _{IN}	79M05~79M09	−35	V	
		79M12~79M15	−35		
		79M18~79M24	−40		
Storge Temperature Range	T _{stg}	TO-220F −40~+150		°C	
		TO-252 −40~+150			
Operating Temperature Range	Operating Junction Temperature		T _j	TO-220F −30~+150	°C
				TO-252 −30~+150	
	Operating Junction Temperature		T _{opr}	−40~+85	
Power Dissipation	P _D	7.5(T _C ≤75°C)			W

■ THERMAL CHARACTERISTICS

Thermal Resistance	Junction-to-Ambient Temperature	θ_{ja}	TO220F	TO252	°C/W
			60	125	
	Junction-to-Case	θ_{jc}	7	12.5	

■ ELECTRICAL CHARACTERISTICS ($T_j=25^\circ\text{C}$, $C_{IN}=2.2\mu\text{F}$, $C_o=1.0\mu\text{F}$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
NJM79M05 FA/DL1A						
Output Voltage	V_O	$V_{IN}=-10\text{V}$, $I_O=0.35\text{A}$	-4.8	-5.0	-5.2	V
Quiescent Current	I_Q	$V_{IN}=-10\text{V}$, $I_O=0\text{mA}$	—	2.2	5.0	mA
Load Regulation	ΔV_O-I_O	$V_{IN}=-10\text{V}$, $I_O=0.005\sim 0.5\text{A}$	—	35	50	mV
Line Regulation	ΔV_O-V_{IN}	$V_{IN}=-7\sim -25\text{V}$, $I_O=0.35\text{A}$	—	5	50	mV
Ripple Rejection	RR	$V_{IN}=-10\text{V}$, $I_O=0.35\text{A}$, $e_{in}=2V_{p.p.}$, $f=120\text{Hz}$	50	58	—	dB
Output Noise Voltage	V_{NO}	$V_{IN}=-10\text{V}$, $I_O=0.35\text{A}$, $BW=10\text{Hz}\sim 100\text{kHz}$	—	100	—	μV
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=-10\text{V}$, $I_O=5\text{mA}$	—	-0.4	—	mV/°C

■ ELECTRICAL CHARACTERISTICS (T_j=25°C, C_{IN}=2.2 μF, C_O=1.0 μF) Measurement is to be conducted in pulse testing


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
NJM79M06 FA/DL1						
Output Voltage	V _O	V _{IN} =-11V, I _O =0.35A	-5.75	-6.0	-6.25	V
Quiescent Current	I _Q	V _{IN} =-11V, I _O =0mA	—	2.2	5.0	mA
Load Regulation	ΔV _O -I _O	V _{IN} =-11V, I _O =0.005~0.5A	—	35	60	mV
Line Regulation	ΔV _O -V _{IN}	V _{IN} =-8~-25V, I _O =0.35A	—	5	60	mV
Ripple Rejection	RR	V _{IN} =-11V, I _O =0.35A, e _{in} =2V _{p-p} , f=120Hz	50	57	—	dB
Output Noise Voltage	V _{NO}	V _{IN} =-11V, I _O =0.35A, BW=10Hz~100kHz	—	110	—	μV
Average Temperature Coefficient of Output Voltage	ΔV _O /ΔT	V _{IN} =-11V, I _O =5mA	—	-0.5	—	mV/°C
NJM79M08 FA/DL1						
Output Voltage	V _O	V _{IN} =-14V, I _O =0.35A	-7.7	-8.0	-8.3	V
Quiescent Current	I _Q	V _{IN} =-14V, I _O =0mA	—	2.2	5.0	mA
Load Regulation	ΔV _O -I _O	V _{IN} =-14V, I _O =0.005~0.5A	—	40	80	mV
Line Regulation	ΔV _O -V _{IN}	V _{IN} =-10.5~-25V, I _O =0.35A	—	8	80	mV
Ripple Rejection	RR	V _{IN} =-14V, I _O =0.35A, e _{in} =2V _{p-p} , f=120Hz	50	55	—	dB
Output Noise Voltage	V _{NO}	V _{IN} =-14V, I _O =0.35A, BW=10Hz~100kHz	—	130	—	μV
Average Temperature Coefficient of Output Voltage	ΔV _O /ΔT	V _{IN} =-14V, I _O =5mA	—	-0.7	—	mV/°C
NJM79M09 FA/DL1						
Output Voltage	V _O	V _{IN} =-15V, I _O =0.35A	-8.65	-9.0	-9.35	V
Quiescent Current	I _Q	V _{IN} =-15V, I _O =0mA	—	2.2	5.0	mA
Load Regulation	ΔV _O -I _O	V _{IN} =-15V, I _O =0.005~0.5A	—	40	90	mV
Line Regulation	ΔV _O -V _{IN}	V _{IN} =-11.5~-25V, I _O =0.35A	—	8	80	mV
Ripple Rejection	RR	V _{IN} =-15V, I _O =0.35A, e _{in} =2V _{p-p} , f=120Hz	50	54	—	dB
Output Noise Voltage	V _{NO}	V _{IN} =-15V, I _O =0.35A, BW=10Hz~100kHz	—	150	—	μV
Average Temperature Coefficient of Output Voltage	ΔV _O /ΔT	V _{IN} =-15V, I _O =5mA	—	-0.8	—	mV/°C
NJM79M12 FA/DL1						
Output Voltage	V _O	V _{IN} =-19V, I _O =0.35A	-11.5	-12.0	-12.5	V
Quiescent Current	I _Q	V _{IN} =-19V, I _O =0mA	—	2.7	6.0	mA
Load Regulation	ΔV _O -I _O	V _{IN} =-19V, I _O =0.005~0.5A	—	30	120	mV
Line Regulation	ΔV _O -V _{IN}	V _{IN} =-14.5~-30V, I _O =0.35A	—	3	80	mV
Ripple Rejection	RR	V _{IN} =-19V, I _O =0.35A, e _{in} =2V _{p-p} , f=120Hz	54	71	—	dB
Output Noise Voltage	V _{NO}	V _{IN} =-19V, I _O =0.35A, BW=10Hz~100kHz	—	150	—	μV
Average Temperature Coefficient of Output Voltage	ΔV _O /ΔT	V _{IN} =-19V, I _O =5mA	—	-0.4	—	mV/°C

■ ELECTRICAL CHARACTERISTICS ($T_j=25^\circ\text{C}$, $C_{IN}=2.2\ \mu\text{F}$, $C_o=1.0\ \mu\text{F}$) Measurement is to be conducted in pulse testing.


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
NJM79M15 FA/DLI						
Output Voltage	V_O	$V_{IN}=-23\text{V}$, $I_O=0.35\text{A}$	-14.4	-15.0	-15.6	V
Quiescent Current	I_Q	$V_{IN}=-23\text{V}$, $I_O=0\text{mA}$	—	2.7	6.0	mA
Load Regulation	ΔV_O-I_O	$V_{IN}=-23\text{V}$, $I_O=0.005\sim 0.5\text{A}$	—	30	150	mV
Line Regulation	ΔV_O-V_{IN}	$V_{IN}=-17.5\sim -30\text{V}$, $I_O=0.35\text{A}$	—	3	80	mV
Ripple Rejection	RR	$V_{IN}=-23\text{V}$, $I_O=0.35\text{A}$, $e_{in}=2V_{P-P}$, $f=120\text{Hz}$	54	70	—	dB
Output Noise Voltage	V_{NO}	$V_{IN}=-23\text{V}$, $I_O=0.35\text{A}$, $BW=10\text{Hz}\sim 100\text{kHz}$	—	170	—	μV
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=-23\text{V}$, $I_O=5\text{mA}$	—	-0.5	—	mV/ $^\circ\text{C}$
NJM79M18 FA/DLI						
Output Voltage	V_O	$V_{IN}=-27\text{V}$, $I_O=0.35\text{A}$	-17.3	-18.0	-18.7	V
Quiescent Current	I_Q	$V_{IN}=-27\text{V}$, $I_O=0\text{mA}$	—	2.7	6.0	mA
Load Regulation	ΔV_O-I_O	$V_{IN}=-27\text{V}$, $I_O=0.005\sim 0.5\text{A}$	—	35	180	mV
Line Regulation	ΔV_O-V_{IN}	$V_{IN}=-21\sim -33\text{V}$, $I_O=0.35\text{A}$	—	4	80	mV
Ripple Rejection	RR	$V_{IN}=-27\text{V}$, $I_O=0.35\text{A}$, $e_{in}=2V_{P-P}$, $f=120\text{Hz}$	54	69	—	dB
Output Noise Voltage	V_{NO}	$V_{IN}=-27\text{V}$, $I_O=0.35\text{A}$, $BW=10\text{Hz}\sim 100\text{kHz}$	—	200	—	μV
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=-27\text{V}$, $I_O=5\text{mA}$	—	-0.6	—	mV/ $^\circ\text{C}$
NJM79M24 FA/DLI						
Output Voltage	V_O	$V_{IN}=-33\text{V}$, $I_O=0.35\text{A}$	-23.0	-24.0	-25.0	V
Quiescent Current	I_Q	$V_{IN}=-33\text{V}$, $I_O=0\text{mA}$	—	2.7	6.0	mA
Load Regulation	ΔV_O-I_O	$V_{IN}=-33\text{V}$, $I_O=0.005\sim 0.5\text{A}$	—	40	240	mV
Line Regulation	ΔV_O-V_{IN}	$V_{IN}=-27\sim -38\text{V}$, $I_O=0.35\text{A}$	—	5	80	mV
Ripple Rejection	RR	$V_{IN}=-33\text{V}$, $I_O=0.35\text{A}$, $e_{in}=2V_{P-P}$, $f=120\text{Hz}$	54	66	—	dB
Output Noise Voltage	V_{NO}	$V_{IN}=-33\text{V}$, $I_O=0.35\text{A}$, $BW=10\text{Hz}\sim 100\text{kHz}$	—	300	—	μV
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=-33\text{V}$, $I_O=5\text{mA}$	—	-0.8	—	mV/ $^\circ\text{C}$

■ TEST CIRCUIT



1. Output Voltage, Line Regulation, Load Regulation, Quiescent Current, Average Temperature Coefficient of Output Voltage, Output Noise Voltage

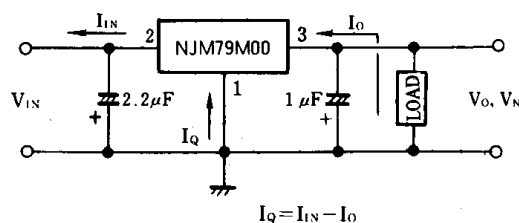

2. Ripple Rejection

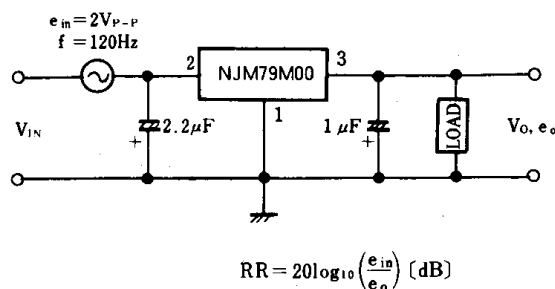


■ POWER DISSIPATION VS. AMBIENT TEMPERATURE

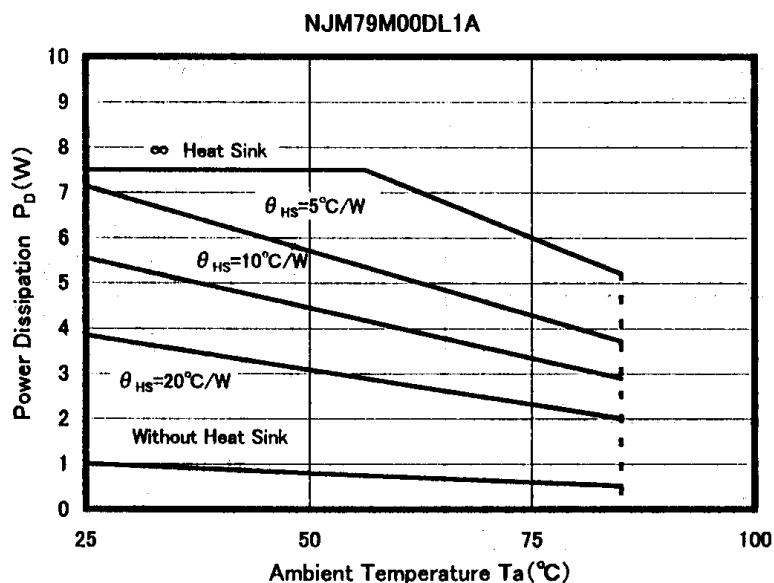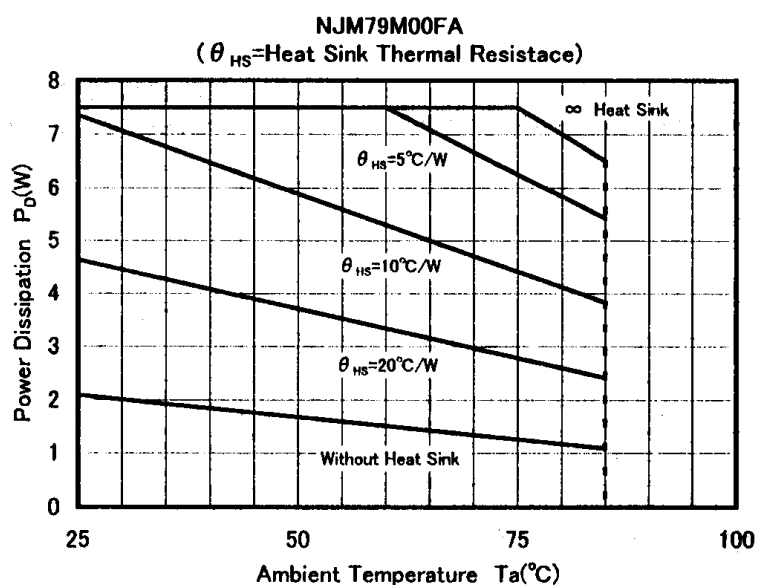

TYPICAL CHARACTERISTICS


NJM79M00 Output Characteristics

($T_j = 25^\circ\text{C}$, $I_o = 0.35\text{A}$)

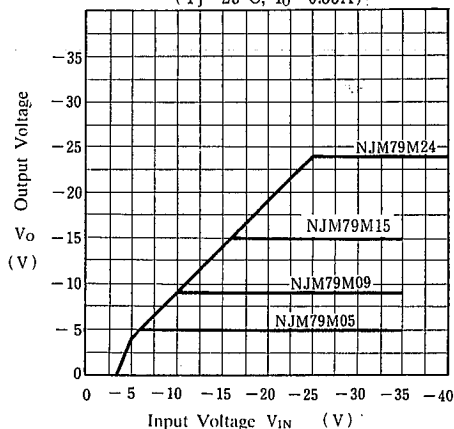


NJM79M12 Output Voltage vs. Low Input Voltage

($T_j = 25^\circ\text{C}$)

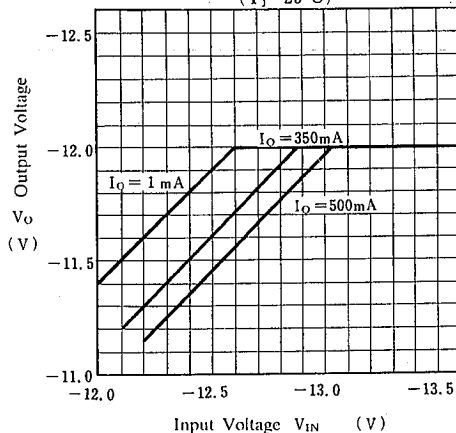

NJM79M05/15/24 Load Characteristics


($T_j = 25^\circ\text{C}$)

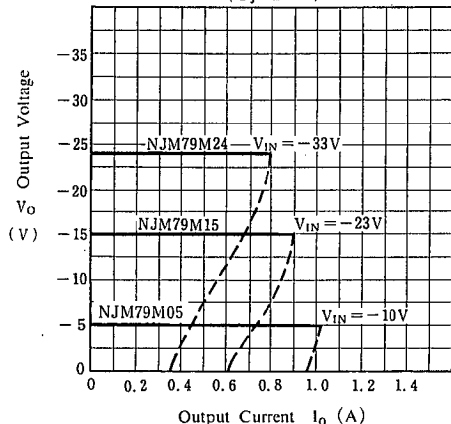


NJM79M00 Series

Short Circuit Output Current

($T_j = 25^\circ\text{C}$)

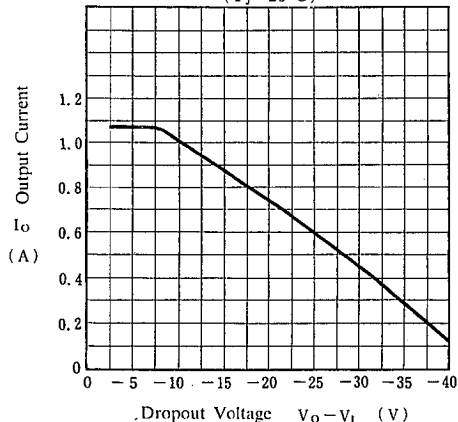


NJM79M05/12/24 Output Voltage vs. Junction Temperature



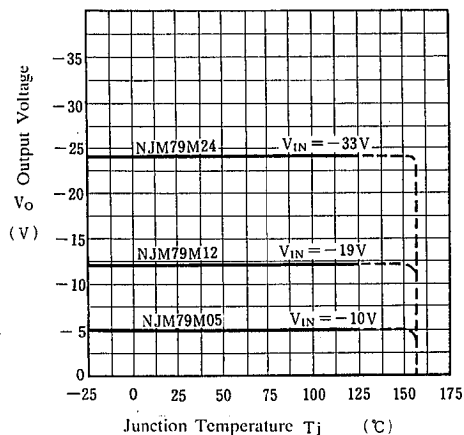


NJM79M05/15/24 Ripple Rejection vs. Frequency

($T_j = 25^\circ\text{C}$, $I_o = 350\text{mA}$, $e_{in} = 2V_{p-p}$)

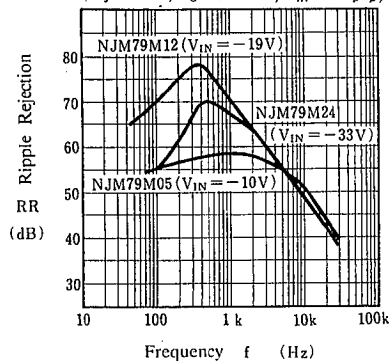

■ TYPICAL CHARACTERISTICS

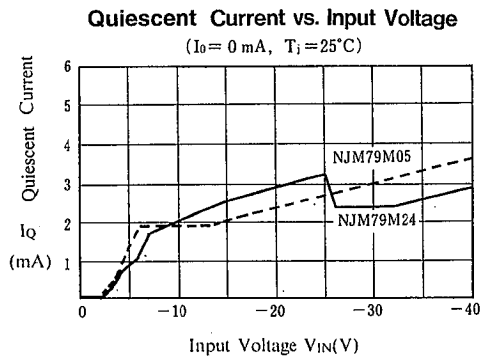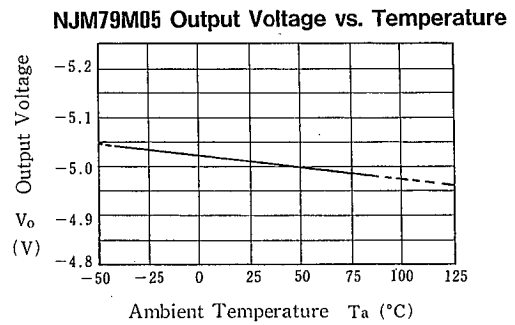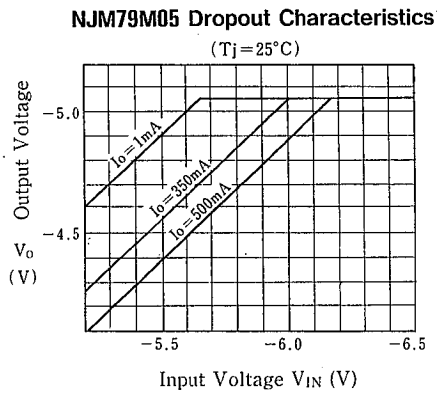

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.