

NUF9002FC

Low Capacitance 10 Line EMI Filter with ESD Protection

This device is a 10 line EMI filter array for wireless applications. Greater than -25 dB attenuation is obtained at frequencies from 900 MHz to 3.0 GHz. ESD protection is provided across all capacitors.

Features

- EMI Filtering and ESD Protection
- Integration of 50 Discretes
- Provides Protection for IEC61000-4-2 (Level 4)
 - ♦ 8.0 kV (Contact)
- Flip-Chip Package
- Moisture Sensitivity Level 1
- ESD Rating: Machine Model = C; Human Body Model = 3B
- Pb-Free Package is Available

Benefits

- Reduces EMI/RFI Emissions on a Data Line
- Integrated Solution Offers Cost and Space Savings
- Reduces Parasitic Inductances Which Offer a More “Ideal” Low Pass Filter Response
- Integrated Solution Improves System Reliability

Applications

- LCD for Cell Phones and PDAs
- Computers and Printers
- Communication Systems
- MP3 Players

MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Rating		Symbol	Value	Unit
ESD Discharge IEC61000-4-2	Contact Discharge	V_{PP}	8.0	kV
Steady-State Power per Resistor		P_R	100	mW
Steady-State Power per Package		P_T	200	mW
Operating Temperature Range		T_{OP}	-40 to +85	$^\circ\text{C}$
Storage Temperature Range		T_{STG}	-55 to +150	$^\circ\text{C}$
Junction Temperature		T_J	+125	$^\circ\text{C}$

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.




ON Semiconductor®

<http://onsemi.com>

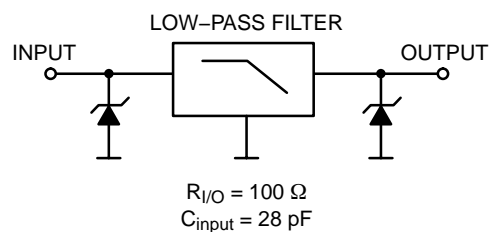


MARKING DIAGRAM




A1

Flip-Chip
CASE 499G



NUF9002 = Device Code
A = Assembly Location
Y = Year
WW = Work Week

PIN CONFIGURATION (Ball Side)

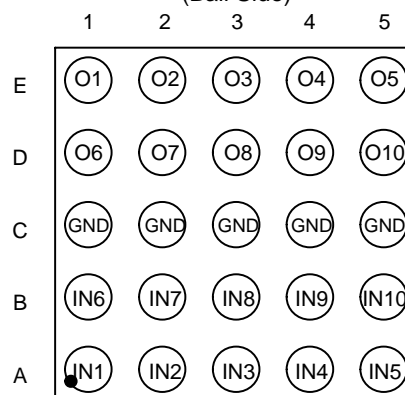

ORDERING INFORMATION

Device	Package	Shipping†
NUF9002FCT1	Flip-Chip	3000 Tape & Reel
NUF9002FCT1G	Flip-Chip (Pb-Free)	3000 Tape & Reel


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Maximum Reverse Working Voltage	V_{RWM}	–	–	–	5.0	V
Breakdown Voltage	V_{BR}	$I_R = 1.0\text{ mA}$	6.0	7.0	8.0	V
Leakage Current	I_R	$V_{RM} = 3.0\text{ V}$	–	–	0.1	μA
Series Resistance	R_A	–	85	100	115	Ω
Capacitance	$C_{LINE\ 1}$	$f = 1.0\text{ MHz}, 0\text{ Vdc}$	–	28	35	pF
Cut-Off Frequency	f_{3dB}	(Above this frequency, appreciable attenuation occurs)	–	110	–	MHz

TYPICAL PERFORMANCE CURVE


($T_A = 25^\circ\text{C}$ unless otherwise specified)

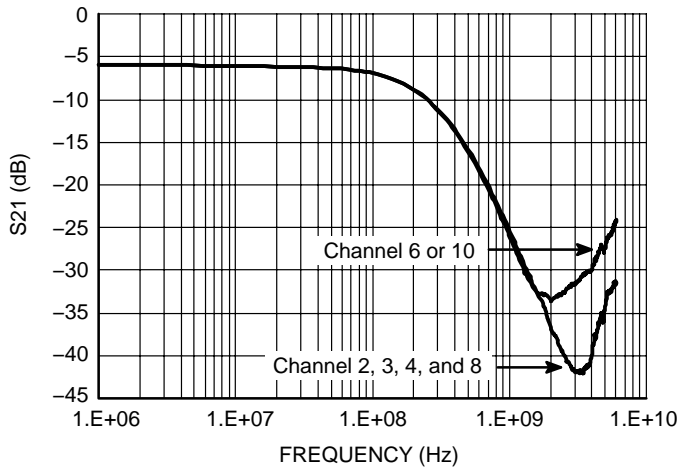

**Figure 1. Insertion Loss Characteristics
(S21 Measurement)**

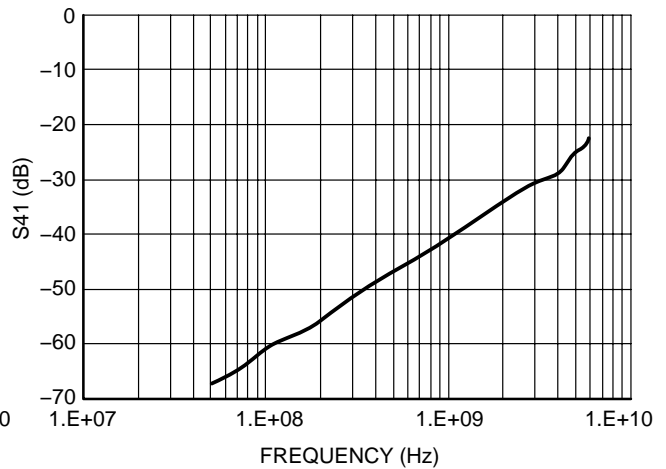

**Figure 2. Analog Crosstalk Curve
(S41 Measurement)**

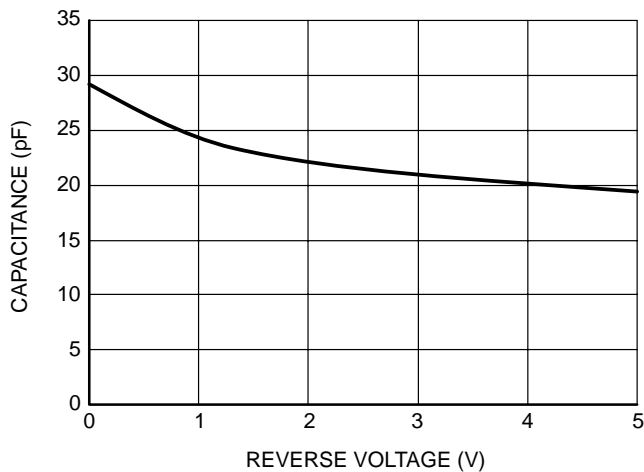

**Figure 3. Typical Line Capacitance vs. Reverse
Bias Voltage**

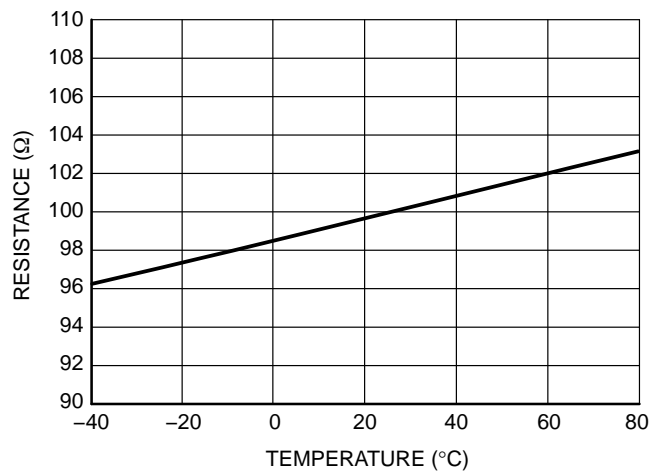


Figure 4. Typical Resistance Over Temperature

PRINTED CIRCUIT BOARD RECOMMENDATIONS

Parameter	500 μm Pitch 300 or 350 μm Solder Ball
PCB Pad Size	250 μm +25 -0
Pad Shape	Round
Pad Type	NSMD
Solder Mask Opening	350 μm \pm 25
Solder Stencil Thickness	125 μm
Stencil Aperture	250 x 250 μm sq.
Solder Flux Ratio	50/50
Solder Paste Type	No Clean Type 3 or Finer
Trace Finish	OSP Cu
Trace Width	150 μm Max


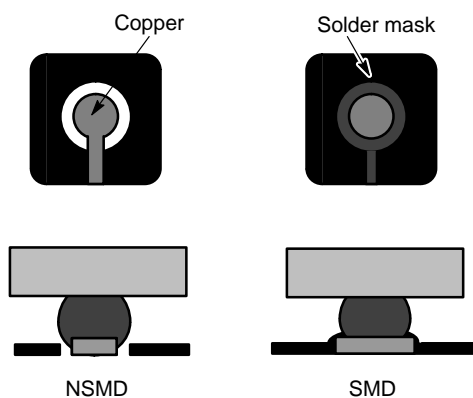


Figure 5. NSMD vs. SMD

NUF9002FC

PACKAGE DIMENSIONS


FLIP-CHIP-25 CSP CASE 499G-01 ISSUE A

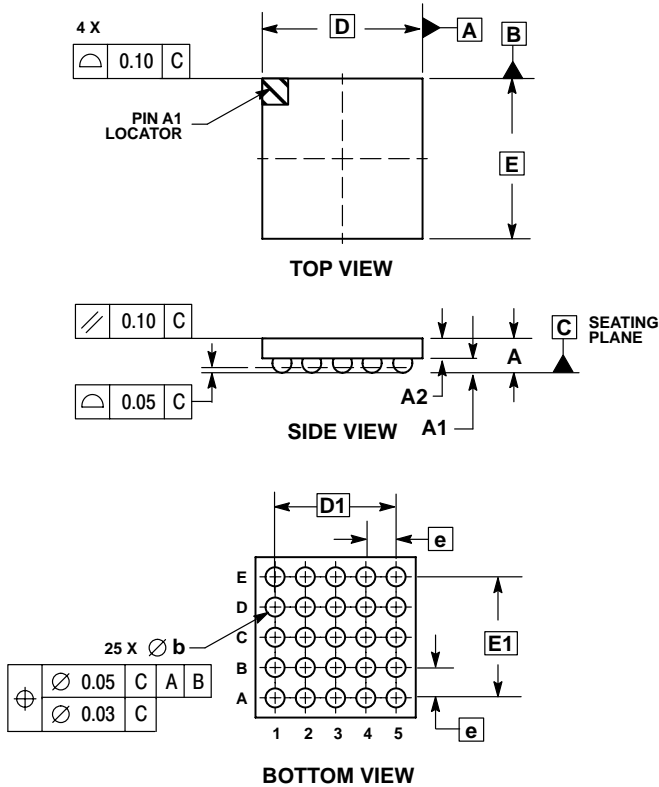

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. COPLANARITY APPLIES TO SPHERICAL CROWNS OF SOLDER BALLS.

MILLIMETERS		
DIM	MIN	MAX
A	---	0.650
A1	0.210	0.270
A2	0.380	0.430
D	2.650 BSC	
E	2.650 BSC	
b	0.290	0.340
e	0.500 BSC	
D1	2.000 BSC	
E1	2.000 BSC	

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 61312, Phoenix, Arizona 85062-1312 USA
Phone: 480-829-7710 or 800-344-3860 Toll Free USA/Canada
Fax: 480-829-7709 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051
Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

Order Literature: <http://www.onsemi.com/litorder>

For additional information, please contact your local Sales Representative.