


MECHANICAL DATA

Dimensions in mm (inches)

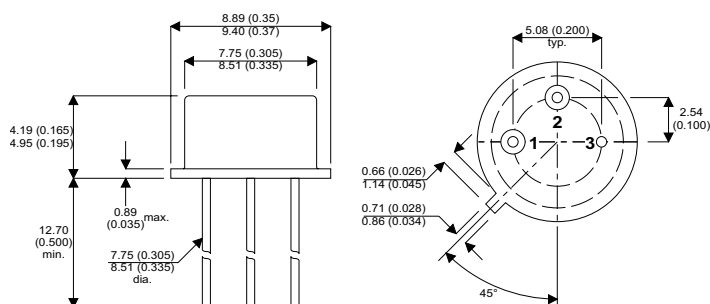

H Package - TO-39 Metal

Pin 1 = Ground

Pin 2 = Vout

Pin 3 = Vin

5 VOLT NEGATIVE VOLTAGE REGULATOR

FEATURES

- 0.01%/V LINE REGULATION
- 0.3%/A LOAD REGULATION
- THERMAL OVERLOAD PROTECTION
- SHORT CIRCUIT PROTECTION
- SAFE OPERATING AREA PROTECTION
- 1% OUTPUT VOLTAGE TOLERANCE

DESCRIPTION

These parts are 5V negative 1.5A Voltage Regulators providing 0.01% per Volt Line Regulator and 0.3% per amp load regulation.

Projection includes safe operating Area current limiting and thermal.

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

V_I	DC Input Voltage	$V_O = -5V$	35V
P_D	Power Dissipation		Internally limited
T_j	Operating Junction Temperature Range		$-55^{\circ}C$ to $+150^{\circ}C$
	Maximum Junction Temperature		$150^{\circ}C$
T_{stg}	Storage Temperature Range		$-65^{\circ}C$ to $+150^{\circ}C$
T_L	Lead Temperature (Soldering, 10 sec)		$300^{\circ}C$

ELECTRICAL CHARACTERISTICS ($T_j = 25^\circ\text{C}$ unless stated)

Parameter	Test Conditions	IP7905AH IP120AH-05			IP7905H IP120H-05			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
V _O Output Voltage*	I _O = 100mA V _{IN} = 10V	- 4.95	- 5	- 5.05	4.80	5	5.20	V
	I _O = 5mA to 350mA P _D ≤ P _{MAX}	- 4.85		- 5.15	4.75		5.25	
	T _j = -55 to +150°C	(V _{IN} = - 7.5 to - 20V)						
ΔV _O Line Regulation*	I _O = 200mA		3	10			50	mV
	I _O = 200mA T _j = -55 to +150°C		3	10			30	
		(V _{IN} = - 7 to - 25V)						
ΔV _O Load Regulation*	I _O = 200mA T _j = -55 to +150°C		3	10			30	mV
		(V _{IN} = - 8 to - 25V)						
	I _O = 500mA		3	10			30	
		(V _{IN} = 8 to 12V)						
ΔV _O Load Regulation*	I _O = 5mA to 500mA V _{IN} = 10V T _j = -55 to +150°C		5	50			100	mV
I _d Quiescent Current*	I _O = 350mA V _{IN} = 10V T _j = -55 to +150°C		4	6				mA
ΔI _Q Quiescent Current Change*	I _O = 5 to 500 mA V _{IN} = 10V T _j = -55 to +150°C		0.1	0.5			0.5	mA
	I _O = 200mA T _j = -55 to +150°C		0.2	0.8			0.8	
		(V _{IN} = - 8 to - 25V)						
V _N Output Noise Voltage	f = 10Hz to 100kHz		40	200			400	μV
$\frac{\Delta V_{IN}}{\Delta V_O}$ Ripple Rejection	f = 120Hz I _O = 300mA	65	80		54			dB
		(V _{IN} = - 8 to - 18V)						
	f = 120Hz I _O = 100mA	65	80		54			
	T _j = -55 to +150°C	(V _{IN} = - 8 to - 8V)						
I _{SC} Dropout Voltage*	I _O = 350mA		2	2.5			2.5	V
I _{PK} Short Circuit Current*	V _{IN} = 35V		600	1200.		600	1200	mA
Peak Output Current*	V _{IN} = 10V	0.7	2.4	3.3	0.7	2.4	3.3	A
Average Temperature Coefficient of Output Voltage*	I _O = 5mA		0.5	2.0		0.5		mV/°C

* Pulse Test: $t_p \leq 10\text{ms}$, $\delta \leq 5\%$.

All characteristics are measured with a capacitor across the input of $0.22\mu\text{F}$ and a capacitor across the output of $0.1\mu\text{F}$. Output Voltage changes due to changes in internal temperature must be taken into account separately. Although power dissipation is internally limited, these specifications apply for up to 2W for the TO-39 package.

THERMAL DATA

$R_{THj\text{-case}}$	Thermal Resistance Junction – Case	TO-39 (H Package)	$20^\circ\text{C} / \text{W Typ.}$
$R_{THj\text{-amb}}$	Thermal Resistance Junction – Ambient	TO-39 (H Package)	$140^\circ\text{C} / \text{W Typ.}$