

GP1S56T

Compact, High Sensing Accuracy Type Photointerrupter with Positioning Pin

■ Features


1. High sensing accuracy (Slit width : 0.15mm)
2. Compact (Case height : 7.5mm)
3. With positioning pin
4. PWB direct mounting type

■ Applications

1. Floppy disk drives
2. VCRs, cassette decks
3. Optoelectronic switches

■ Outline Dimensions

(Unit : mm)

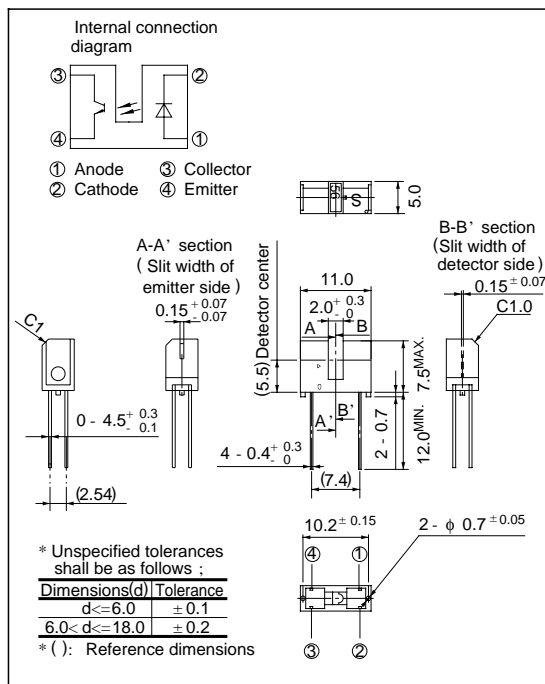

■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	*1 Peak forward current	I _{FM}	1	A
	Reverse voltage	V _R	6	V
	Power dissipation	P	75	mW
Output	Collector-emitter voltage	V _{CEO}	35	V
	Emitter-collector voltage	V _{ECO}	6	V
	Collector current	I _C	20	mA
	Collector power dissipation	P _C	75	mW
Operating temperature		T _{opr}	- 25 to + 85	°C
Storage temperature		T _{stg}	- 40 to + 100	°C
*2 Soldering temperature		T _{sol}	260	°C

*1 Pulse width ≤ 100 μs, Duty ratio = 0.01

*2 For 5 seconds

■ Electro-optical Characteristics

(Ta = 25°C)

Parameter			Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage		VF	IF = 20mA	-	1.2	1.4	V
	Peak forward voltage		VFM	IFM = 0.5A	-	3	4	V
	Reverse current		IR	VR = 3V	-	-	10	μA
Output	Collector dark current		ICEO	VCE = 20V	-	1	100	nA
Transfer characteristics	Collector Current		IC	VCE = 5V, IF = 20mA	0.4	-	-	mA
	Collector-emitter saturation voltage		VCE(sat)	IF = 40mA IC = 0.25mA	-	-	0.4	V
	Response time	Rise time	tr	VCE = 2V, IC = 0.5mA RL = 1KΩ	-	38	90	μs
		Fall time	tr		-	48	110	μs

Fig. 1 Forward Current vs. Ambient Temperature

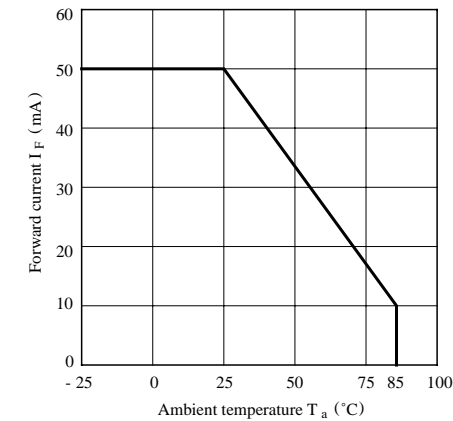


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

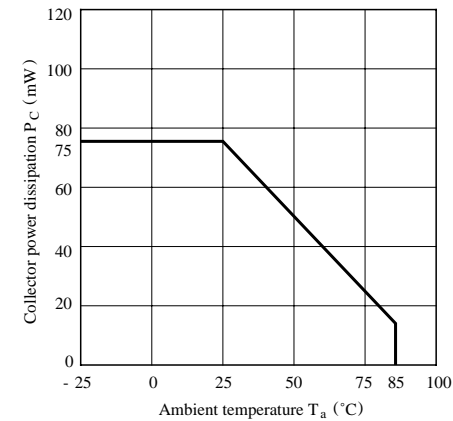


Fig. 3 Peak Forward Current vs. Duty Ratio

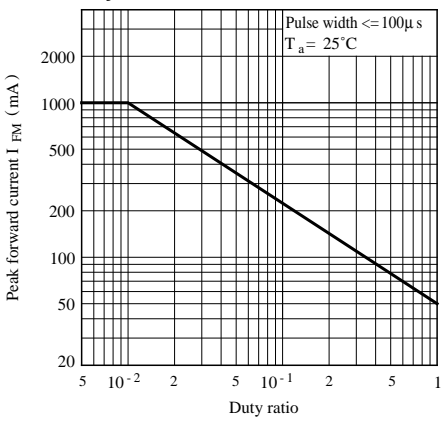


Fig. 4 Forward Current vs. Forward Voltage

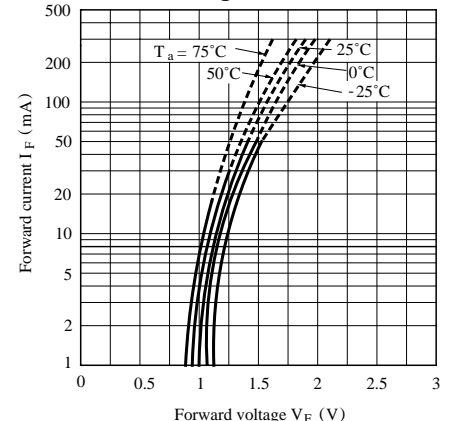


Fig. 5 Collector Current vs. Forward Current

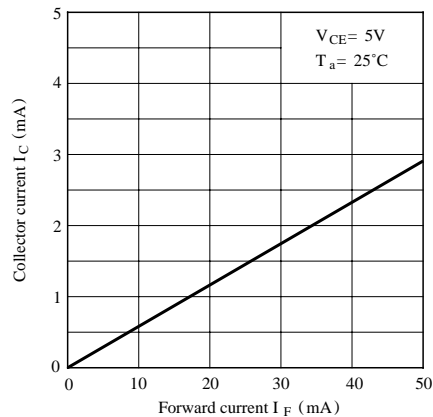


Fig. 6 Collector Current vs. Collector-emitter Voltage

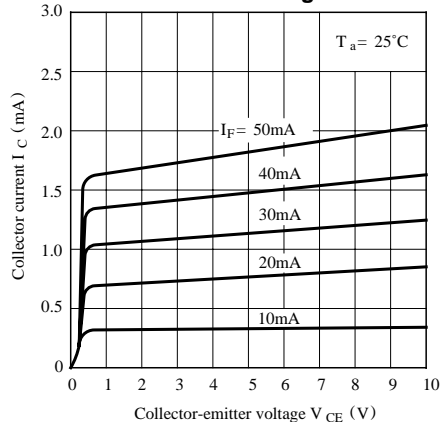


Fig. 7 Collector Current vs. Ambient Temperature

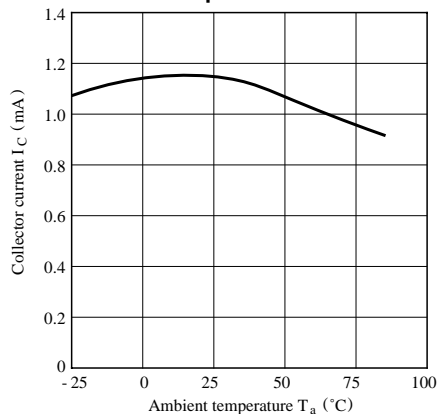


Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature


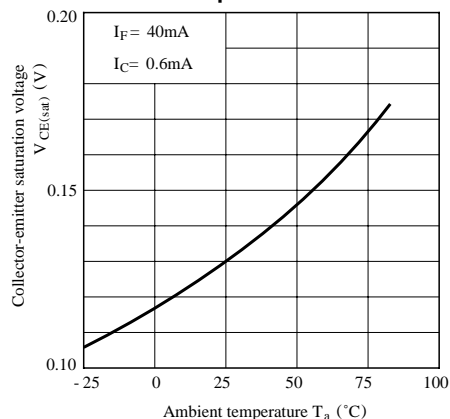


Fig. 9 Response Time vs. Load Resistance

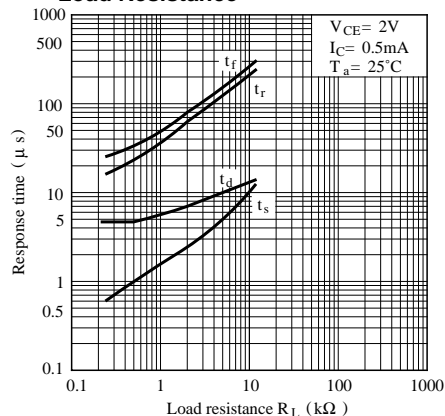

Test Circuit for Response Time

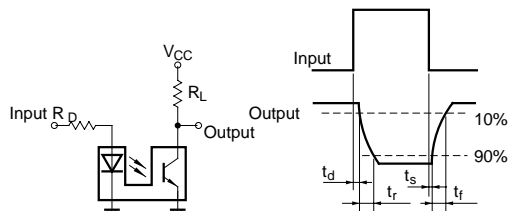


Fig.10 Frequency Response

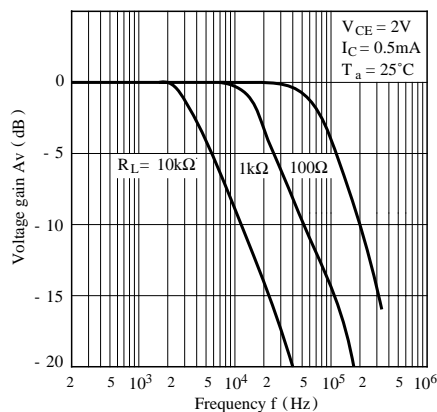


Fig.11 Collector Dark Current vs. Ambient Temperature

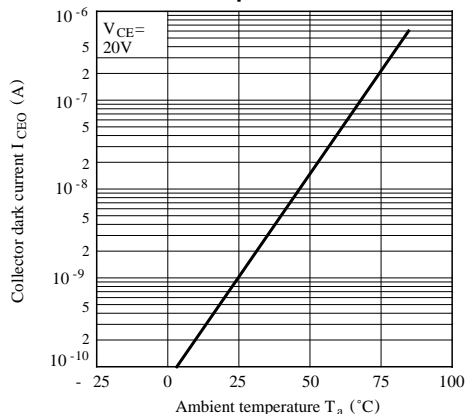


Fig.12 Relative Collector Current vs. Shield Distance (1)


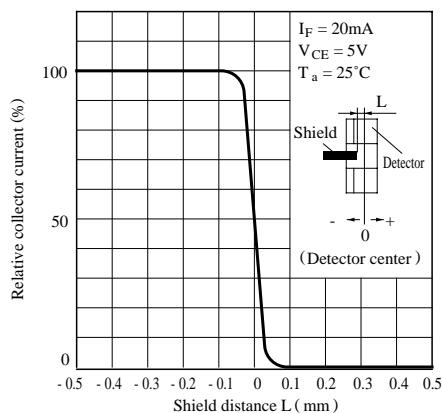


Fig.13 Relative Collector Current vs. Shield Distance (2)

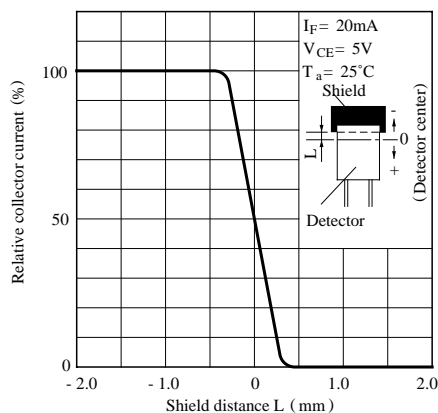

■ Precautions for Use

- (1) In case of cleaning, use only the following type of cleaning solvent.
Ethyl alcohol, methyl alcohol, isopropyl alcohol
- (2) As for other general cautions, refer to the chapter "Precautions for Use".