

GP1S53V/GP1S58V


Compact Photointerrupter

■ Features

1. Compact type
2. High sensing accuracy (Slit width : 0.5mm)
3. PWB direct mounting type
4. With positioning pin (GP1S58V)

■ Outline Dimensions

(Unit : mm)

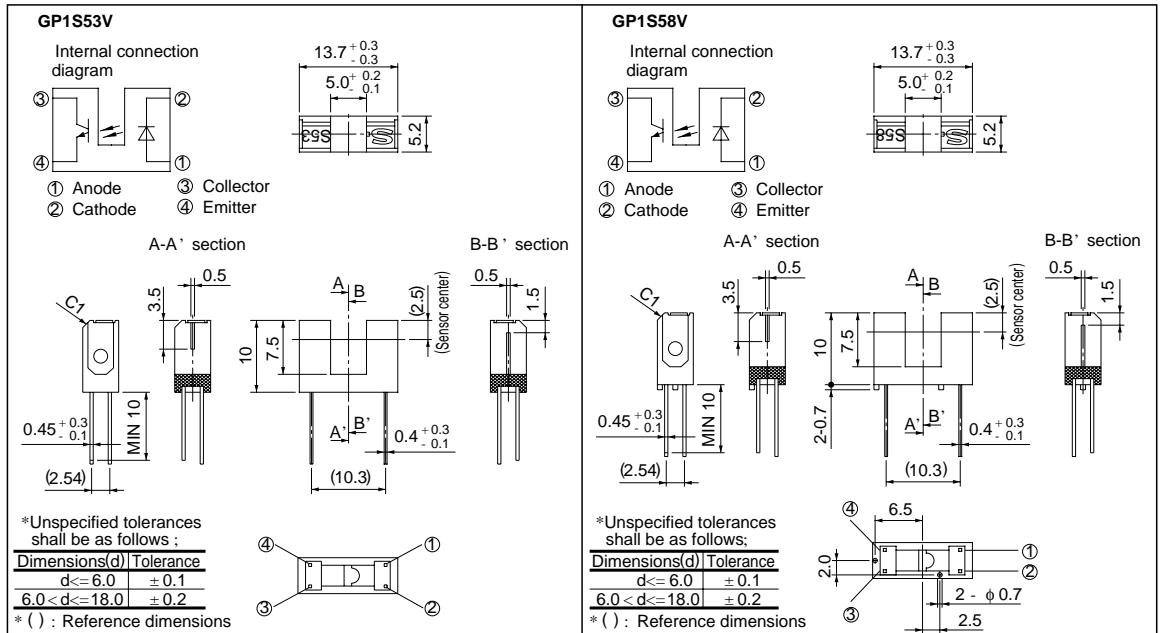

■ Absolute Maximum Ratings (Ta = 25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	*1 Peak forward current	I _{FM}	1	A
	Reverse voltage	V _R	6	V
	Power dissipation	P	75	mW
Output	Collector-emitter voltage	V _{CEO}	35	V
	Emitter-collector voltage	V _{ECO}	6	V
	Collector current	I _C	20	mA
	Collector power dissipation	P _C	75	mW
	Operating temperature	T _{opr}	- 25 to + 85	°C
	Storage temperature	T _{stg}	- 40 to + 100	°C
	*2 Soldering temperature	T _{sol}	260	°C

*1 Pulse width ≤ 100 μs, Duty ratio = 0.01

*2 For 5 seconds

■ Electro-optical Characteristics

(Ta= 25°C)

Parameter			Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage		V_F	$I_F = 20\text{mA}$	-	1.25	1.4	V
	Peak forward voltage		V_{FM}	$I_{FM} = 0.5\text{A}$	-	3	4	V
	Reverse current		I_R	$V_R = 3\text{V}$	-	-	10	μA
Output	Collector dark current		I_{CEO}	$V_{CE} = 20\text{V}$	-	1	100	nA
Transfer characteristics	Collector Current		I_C	$I_F = 20\text{mA}, V_{CE} = 5\text{V}$	0.5	-	1.5	mA
	Collector-emitter saturation voltage		$V_{CE(sat)}$	$I_F = 40\text{mA}, I_C = 0.2\text{mA}$	-	-	0.4	V
	Response time	Rise time	t_r	$V_{CE} = 2\text{V}, I_C = 2\text{mA}$ $R_L = 100\Omega$	-	3	15	μs
		Fall time	t_f		-	4	20	μs

Fig. 1 Forward Current vs. Ambient Temperature

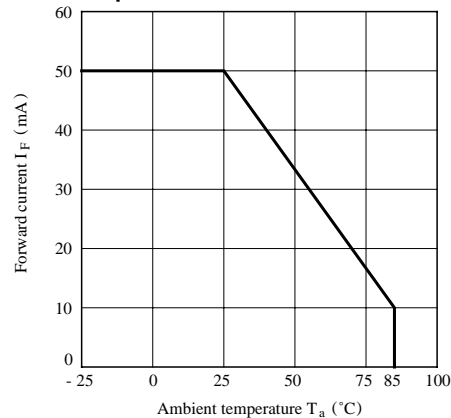


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

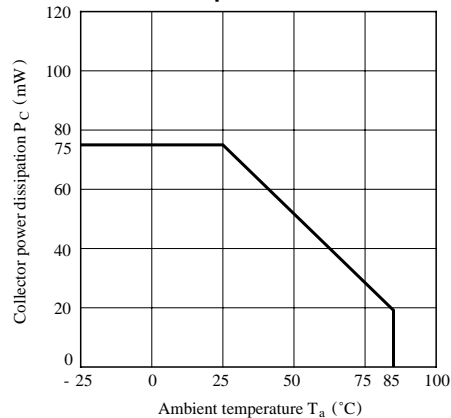


Fig. 3 Peak Forward Current vs. Duty Ratio

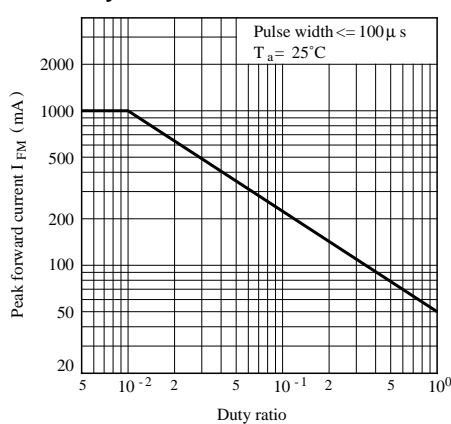


Fig. 4 Forward Current vs. Forward Voltage

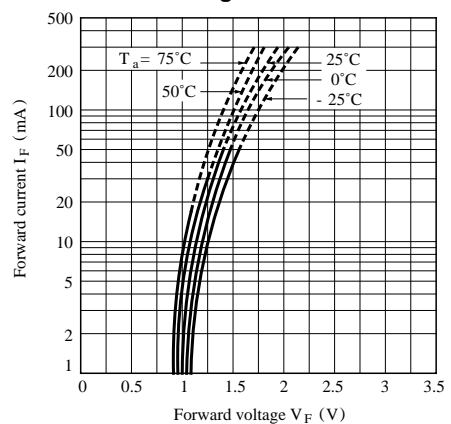


Fig. 5 Collector Current vs. Forward Current

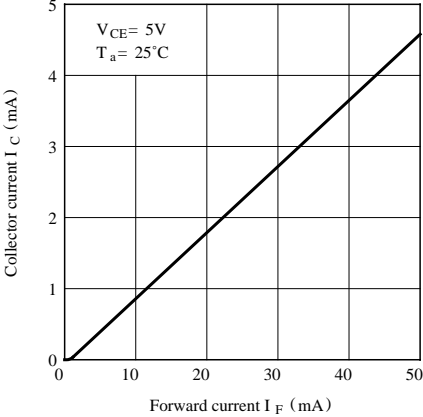


Fig. 6 Collector Current vs. Collector-emitter Voltage

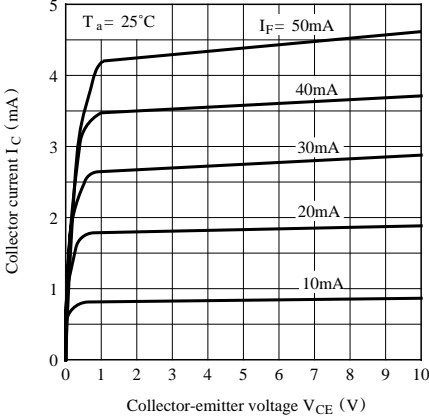


Fig. 7 Collector Current vs. Ambient Temperature

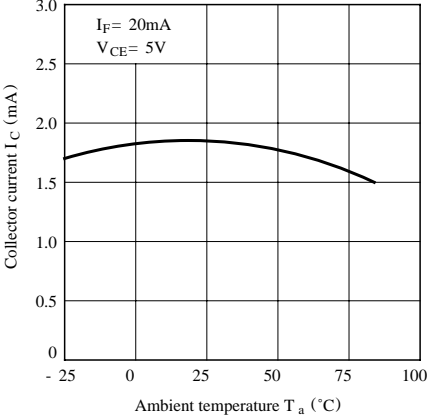


Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature


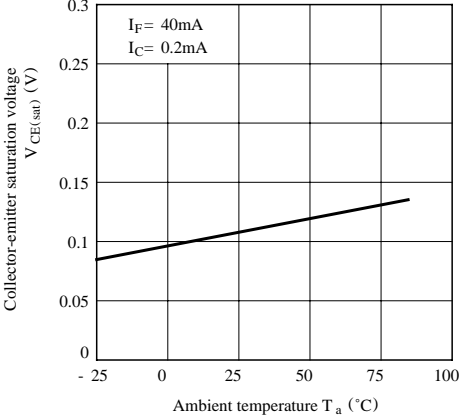


Fig. 9 Response Time vs. Load Resistance

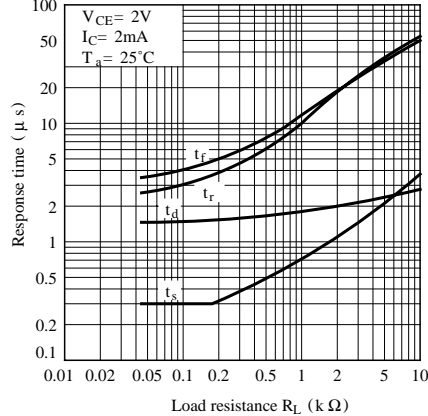

Test Circuit for Response Time

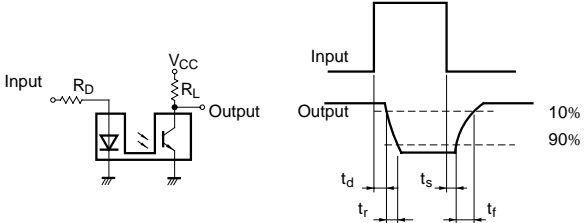


Fig.10 Frequency Response

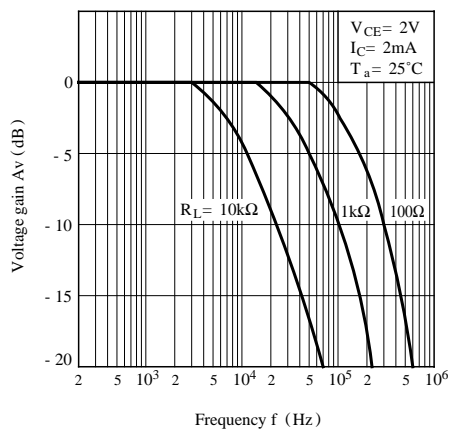


Fig.11 Collector Dark Current vs. Ambient Temperature

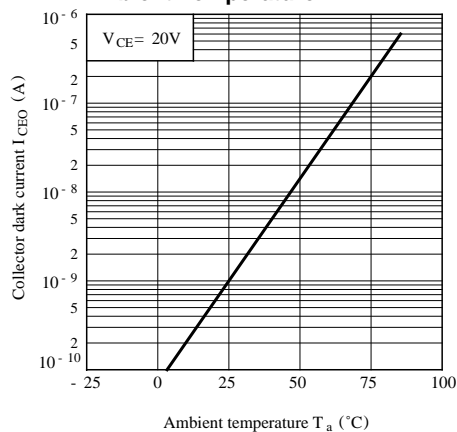


Fig.12 Relative Collector Current vs. Shield Distance (1)


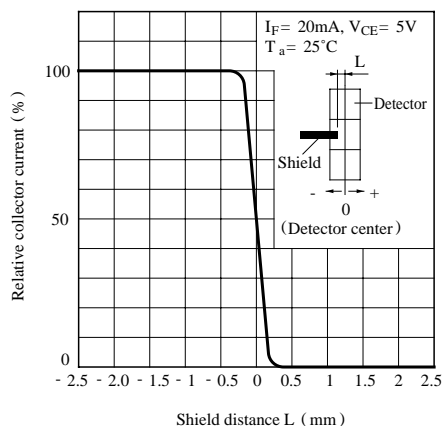


Fig.13 Relative Collector Current vs. Shield Distance (2)

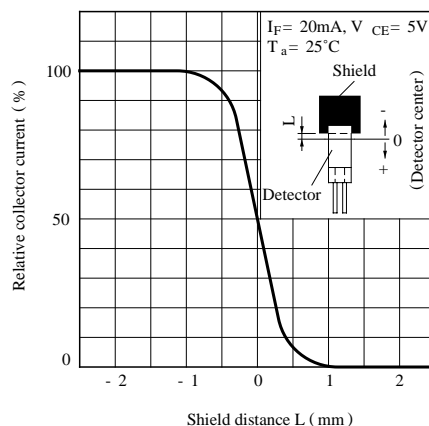

■ Precautions for Use

- (1) In case of cleaning, use only the following type of cleaning solvent.
Ethyl alcohol, methyl alcohol, Isopropyl alcohol
- (2) As for other general cautions, refer to the chapter "Precautions for Use".