




SYNSEMI SEMICONDUCTOR

GBJ/KBJ6A thru GBJ/KBJ6M

Glass Passivated Single-Phase Bridge Rectifiers
Voltage Range 50 to 1000 Volts Forward Current 6.0 Amperes

Features

- ◆ Rating to 1000V PRV
- ◆ Ideal for printed circuit boards
- ◆ Low forward voltage drop, high current capability
- ◆ Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- ◆ The plastic material has Underwriters Laboratory Flammability Classification 94V-0

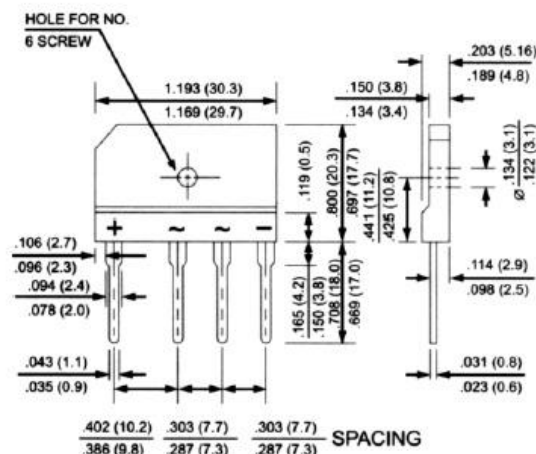

Maximum Ratings and Electrical Characteristics

Dimensions in inches and (millimeters)

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Parameter	Symbols	KBJ6A	KBJ6B	KBJ6D	KBJ6G	KBJ6J	KBJ6K	KBJ6M	Units
		GBJ6A	GBJ6B	GBJ6D	GBJ6G	GBJ6J	GBJ6K	GBJ6M	
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified output current @ $T_J = 100^\circ\text{C}$ (with heatsink Note 2) (without heatsink)	I_{FAV}	6.0 2.8							Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	170.0							Amps
Max. instantaneous forward voltage drop at 3.0A DC	V_F	1.0							Volt
Maximum DC reverse current @ $T_J = 25^\circ\text{C}$ at rated DC blocking voltage per element @ $T_J = 125^\circ\text{C}$	I_R	5.0 500.0							μA
Rating for fusing ($t < 8.3\text{ms}$)	I^2t	120							A^2sec
Typical junction capacitance per element (Note 1)	C_J	55							pF
Typical thermal resistance (Note 2)	$R_{\theta JC}$	1.8							$^\circ\text{C/W}$
Operating temperature range	T_J	-55 to +150							$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150							$^\circ\text{C}$

- Notes:**
1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC
 2. Device mounted on 75mmx 75mm x 1.6mm Cu plate heatsink

GBJ/KBJ6A thru GBJ/KBJ6M

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

FIG. 1 - FORWARD CURRENT DERATING CURVE

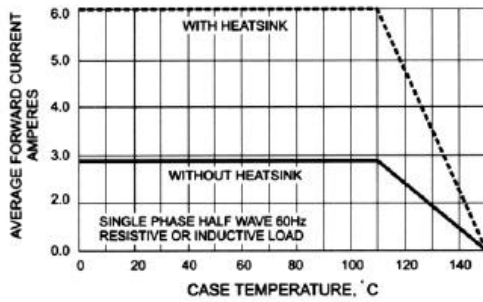


FIG. 2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

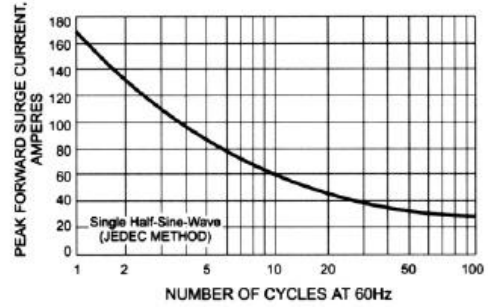


FIG. 3 - TYPICAL JUNCTION CAPACITANCE

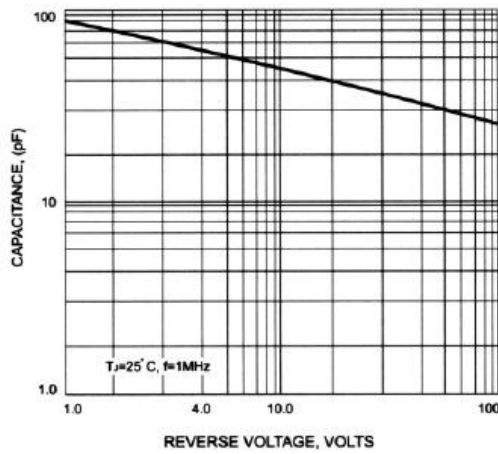


FIG. 4 - TYPICAL FORWARD CHARACTERISTICS

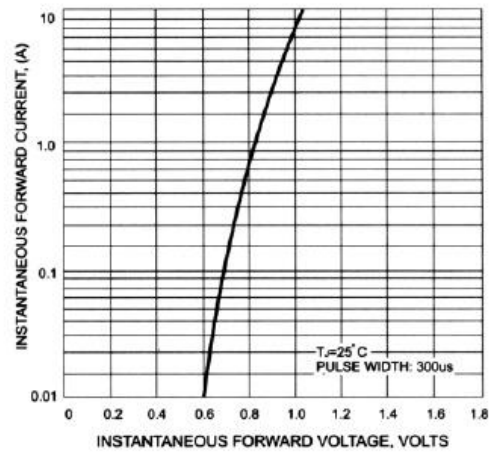


FIG. 5 - TYPICAL REVERSE CHARACTERISTICS

