


Module No.: W03316BSC-3T

Features:

Ø3mm
 BLUE
 Water Clear
 Super Bright
 PIN=26mm
 GaInN/SiC

Dimensions

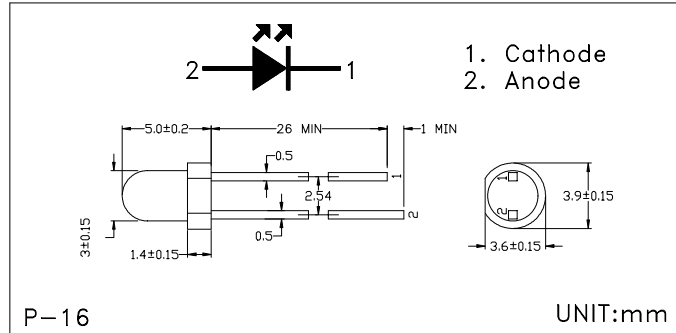

Absolute Maximum Ratings

(Ta=25°C)

Descriptions	Symbol	Value	Unit
Continuous Forward Current	IF	30	mA
Peak Forward Current *1	IFM	50	mA
Reverse Voltage	VR	5	V
Operating Temperature	Topr	-20 ~ +70	°C
Storage Temperature	Tstg	-30 ~ +80	°C
Soldering Temperature *2	Tsol	240	°C

*1 Duty ratio = 1/10, Pulse width = 0.1ms.

*2 At the position of 2mm from the bottom face of resin package within 5 sec.


Electro-optical Characteristics

(Ta=25°C)

Descriptions	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward Voltage	VF1	IF=100μA	2.2			V
	VF2	IF=20mA		3.5	4.0	V
Luminous Intensity *3	IV	IF=20mA	2300	4200		mcd
Peak Emission Wavelength	λp	IF=20mA		468		nm
Spectrum Radiation Bandwidth	Δλ	IF=20mA		35		nm
Half Power Beam Angle	Δθ			±25		deg.
Terminal Capacitance	Ct			300		pF
Response Frequency	fc			5		MHz

*3 Tolerance: ± 30%

Luminous Intensity vs
Forward Current

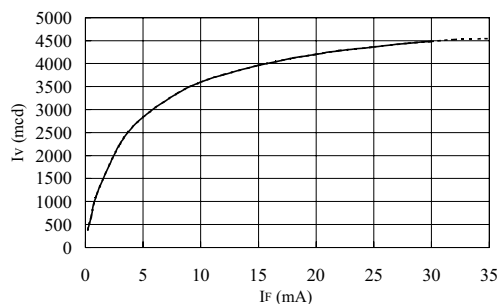

Radiation Diagram

